finder
RELAYING INNOVATION

Time switches 16 A

- Heating and cooling
- Shop displays
- Lighting for parks
- Streetlights and car park lighting
- School bells



12
SERIES

Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice.
FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document.
In case of discrepancies between the printed and online versions, the latter prevails.

Mechanical time switches
- Daily time setting*
- Weekly time setting**

Type 12.01
- Daily
- 1 CO 16 A
- 35.8 mm wide
- 35 mm rail mount

Type 12.11
- Daily
- 1 NO 16 A
- 17.5 mm wide
- 35 mm rail mount

Type 12.31-0000
- Daily
- 1 CO 16 A
- 72 x 72 mm
- Front panel mount




Type 12.31-0007
- Weekly
- 1 CO 16 A
- 72 x 72 mm
- Front panel mount

• Minimum time interval setting:
1 h (12.31-0007)
30 min (12.01)
15 min (12.11 - 12.31-0000)

* Same program every day

** Different program possible for each of the 7 days of the week

For outline drawing see page 16

	12.01	12.11	12.31	
				
	• Mechanical daily time switch • 1 CO 16 A • 35 mm rail (EN 60715) mount	• Mechanical daily time switch • 1 NO 16 A • 35 mm rail (EN 60715) mount	• Mechanical daily or weekly • 1 CO 16 A • Front panel mounting	
				
Contact specification				
Contact configuration	1 CO (SPDT)	1 NO (SPST-NO)	1 CO (SPDT)	
Rated current/Maximum peak current A	16/—	16/30	16/—	
Rated voltage/ Maximum switching voltage V AC	250/—	250/—	250/—	
Rated load AC1 VA	4000	4000	4000	
Rated load AC15 (230 V AC) VA	750	420	420	
Nominal lamp rating:				
incandescent (230 V) W	2000 (NO contact)	2000	2000	
compensated fluorescent (230 V) W	750 (NO contact)	750	750	
uncompensated fluorescent (230 V) W	1000 (NO contact)	1000	1000	
halogen (230 V) W	2000 (NO contact)	2000	2000	
Minimum switching load mW (V/mA)	1000 (10/10)	1000 (10/10)	1000 (10/10)	
Standard contact material	$AgSnO_2$	$AgSnO_2$	$AgSnO_2$	
Supply specification				
Nominal voltage (U_N) V AC (50/60 Hz)	230	230	120 - 230	
V DC	—	—	—	
Rated power AC/DC VA (50 Hz)/W	2/—	2/—	2/—	
Operating range AC (50 Hz)	(0.85…1.1)U_N	(0.85…1.1)U_N	(0.85…1.1)U_N	
DC	—	—	—	
Technical data				
Electrical life at rated load in AC1 cycles	$50 \cdot 10^3$	$50 \cdot 10^3$	$50 \cdot 10^3$	
Type of time switch	daily	daily	daily	weekly
Switching intervals /day	48	96	96	24 (168/week)
Minimum switching interval min	30	15	15	60
Accuracy s/day	1.5	1.5	1.5	
Ambient temperature range °C	–5…+50	–5…+50	–10…+50	
Protection category	IP 20	IP 20	IP 20	
Approvals (according to type)	CE UK CA EAC			

J



Type 12.51
Digital (analogue-style) time switch, daily/weekly programming
- **Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication**
- 1 CO 16 A
- Minimum time interval setting - 30 minutes
- Easily configurable for daily or weekly programming

Type 12.81
Digital Astro-switch
- **Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication**
- 1 CO 16 A
- Astro program: calculation of sunrise and sunset times through date, time and location coordinates
- Option for Astro ON period override, by timeswitch
- Offset function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 10 min steps)

Type 12.C1
Digital weekly astro time switch, 1 module BLE
- 1 NO 10 A
- External switching push-button
- 17.5 mm wide
- Holiday program
- Pulse and astro pulse function
- 1 second minimum switching interval
- GPS antenna synchronization

- Summer/Winter European, USA, Australian, Brazilian time
- Lock with a 4-digit PIN
- Protective separation between supply and contacts
- 35 mm rail (EN 60715) mount
- Location coordinates easily settable for most European countries through post codes

For outline drawing see page 16

	12.51	12.81	NEW 12.C1
			
	• Digital time switch • 1 CO 16 A	• Digital Astro-switch • 1 CO 16 A	• Digital weekly astro time switch • 1 NO 10 A
			
Contact specification			
Contact configuration	1 CO (SPDT)	1 CO (SPDT)	1 NO (SPST-NO)
Rated current/Maximum peak current A	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)	10/20
Rated voltage/Maximum switching voltage V AC	250/400	250/400	250/400
Rated load AC1 VA	4000	4000	2500
Rated load AC15 (230 V AC) VA	750	750	500
Nominal lamp rating:			
230 V incandescent/halogen W	2000	2000	1800
fluorescent tubes with electronic ballast W	1000	1000	1000
fluorescent tubes with electromagnetic ballast W	750	750	—
CFL W	400	400	300
230 V LED W	400	400	300
LV halogen or LED with electronic ballast W	400	400	300
LV halogen or LED with electromagnetic ballast W	800	800	—
Minimum switching load mW (V/mA)	1000 (10/10)	1000 (10/10)	1000 (10/10)
Standard contact material	$AgSnO_2$	$AgSnO_2$	$AgSnO_2$
Supply specification			
Nominal voltage (U_N) V AC (50/60 Hz)	110…230	110…230	110…230
V DC	110…230	110…230	110…230
Rated power AC/DC VA (50 Hz)/W	2.8/0.9	2.8/0.9	1.5/0.5
Operating range V AC (50 Hz)	88…264	88…264	88…264
V DC	88…264	88…264	88…264
Technical data			
Electrical life at rated load in AC1 cycles	$100 \cdot 10^3$	$100 \cdot 10^3$	$100 \cdot 10^3$
Switching intervals	—	—	50
Minimum switching interval min/s	30/—	—	—/1
Accuracy s/day	1	1	1
Communication protocol	NFC	NFC	Bluetooth
Ambient temperature range °C	–20…+50 (see page 10, diagram L12)	–20…+50 (see page 10, diagram L12)	–10…+50 (see page 10, diagram L12)
Protection category	IP 20	IP 20	IP 20
Approvals (according to type)			

Xi-2025, www.findernet.com



Digital time switch, weekly programming
- **Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication**

Type 12.61
- 1 CO 16 A

Type 12.62
- 2 CO 16 A

- Functions:
  Switch ON, Switch OFF
  Pulse: 1s…59 min
- Minimum time interval setting - 1 second
- Summer/Winter European, USA, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 16

	12.61	12.62
		
	• Weekly programming • 1 CO 16 A • Switch ON, Switch OFF, Pulse	• Weekly programming • 2 CO 16 A • Switch ON, Switch OFF, Pulse
		
Contact specification		
Contact configuration	1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current A	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage V AC	250/400	250/400
Rated load AC1 VA	4000	4000
Rated load AC15 (230 V AC) VA	750	750
Nominal lamp rating:		
230 V incandescent/halogen W	2000	2000
fluorescent tubes with electronic ballast W	1000	1000
fluorescent tubes with electromagnetic ballast W	750	750
CFL W	400	400
230 V LED W	400	400
LV halogen or LED with electronic ballast W	400	400
LV halogen or LED with electromagnetic ballast W	800	800
Minimum switching load mW (V/mA)	1000 (10/10)	1000 (10/10)
Standard contact material	$AgSnO_2$	$AgSnO_2$
Supply specification		
Nominal voltage (U_N) V AC (50/60 Hz)	12…24 / 110…230	110…230
V DC	12…24 / 110…230	110…230
Rated power AC/DC VA (50 Hz)/W	2.8/0.9	2.8/0.9
Operating range V AC (50 Hz)	10…30 / 88…253	88…253
V DC	10…30 / 88…253	88…253
Technical data		
Electrical life at rated load in AC1 cycles	$100 \cdot 10^3$	$100 \cdot 10^3$
Type of time switch	Weekly	Weekly
Memory locations for switching times	50	50
Minimum internal setting s	1	1
Accuracy s/day	1	1
Communication protocol	NFC	NFC
Ambient temperature range °C	–20…+50 (see page 10, diagram L12)	–20…+50 (see page 10, diagram L12)
Protection category	IP 20	IP 20
Approvals (according to type)		

XI-2025, www.findernet.com

Weekly Astro time switch
- **Can be programmed in "Classic" mode via the joystick, or "Smart" mode via smartphones with NFC communication**
- **"Astro" program: calculation of sunrise and sunset times through date, time and location coordinates**




Type 12.A1
- 1 CO 16 A

Type 12.A2
- 2 CO 16 A

Type 12.B2
- 2 CO 16 A

- Functions: "Astro" ON, "Astro" OFF Switch ON, Switch OFF Pulse: 1s…59 min
- Location coordinates easily settable for most European countries through Post codes
- Offest function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 1 min step)
- Minimum time interval setting - 1 second
- Summer/Winter European, USA, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 16

	12.A1	12.A2	12.B2
			
	• Weekly programming • 1 CO 16 A • Switch ON, Switch OFF, Pulse	• Weekly programming • 2 CO 16 A • Switch ON, Switch OFF, Pulse	• Yearly programming • 2 CO 16 A • Switch ON, Switch OFF, Pulse, Astro ON, Astro OFF, Astro Pulse
			

Contact specification				
Contact configuration		1 CO (SPDT)	2 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/400
Rated load AC1	VA	4000	4000	4000
Rated load AC15 (230 V AC)	VA	750	750	750
Nominal lamp rating:				
230 V incandescent/halogen	W	2000	2000	2000
fluorescent tubes with electronic ballast	W	1000	1000	1000
fluorescent tubes with electromagnetic ballast	W	750	750	750
CFL	W	400	400	400
230 V LED	W	400	400	400
LV halogen or LED with electronic ballast	W	400	400	400
LV halogen or LED with electromagnetic ballast	W	800	800	800
Minimum switching load	mW (V/mA)	1000 (10/10)	1000 (10/10)	1000 (10/10)
Standard contact material		$AgSnO_2$	$AgSnO_2$	$AgSnO_2$
Supply specification				
Nominal voltage (U_N)	V AC (50/60 Hz)	110…230	12…24 / 110…230	110…230
	V DC	110…230	12…24 / 110…230	110…230
Rated power AC/DC	VA (50 Hz)/W	2.8/0.9	2.8/0.9	2.8/0.9
Operating range	V AC (50 Hz)	88…253	10…30 / 88…253	88…253
	V DC	88…253	10…30 / 88…253	88…253
Technical data				
Electrical life at rated load in AC1	cycles	$100 \cdot 10^3$	$100 \cdot 10^3$	$100 \cdot 10^3$
Type of time switch		Weekly	Weekly	Yearly
Memory locations for switching times		50	50	100
Minimum internal setting	s	1	1	1
Accuracy	s/day	1	1	1
Communication protocol		NFC	NFC	Bluetooth 5, NFC
Ambient temperature range	°C	–20…+50 (see page 10, diagram L12)	–20…+50 (see page 10, diagram L12)	–20…+50 (see page 10, diagram L12)
Protection category		IP 20	IP 20	IP 20
Approvals (according to type)				

J

XI-2025, www.findernet.com

Weekly Astro time switch
- **Suitable for applications where a variable light level is required - programmable via smartphone with NFC communications**
- **Compatible with power supply/ballasts with 0-10V or PWM inputs**

Type 12.A4
- 1 analog output: 0-10V or PWM


- Functions: "Astro" ON, "Astro" OFF, ON/OFF
- Location coordinates easily settable for most European countries through Post codes
- Offest function: allows programming of switching times offset from the astronomic time (by up to 90 min, in 1 min step)
- Minimum time interval setting - 1 minute
- 50 storable programs
- Summer/Winter European, USA, Australian, Brazilian time
- LCD status indication, set-up and programming
- Lock with a 4-digit PIN
- Back-light display
- Internal battery for set-up and programming without supply, easily replaceable from the front
- Protective separation between supply and contacts
- 35 mm wide
- 35 mm rail (EN 60715) mount
- Cadmium free contact material

For outline drawing see page 16

12.A4



- Weekly programming
- 1 analog output: 0-10V or PWM



Analogue output characteristics		
Output signal		0-10 V, 10mA max
Output signal		PWM 30 V, 20 mA max
Contact output characteristics		
Contact configuration		1 CO (SPST)
Rated current/Maximum peak current	A	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	4000
Rated load AC15 (230 V AC)	VA	750
Minimum switching load	mW (V/mA)	1000 (10/10)
Standard contact material		$AgSnO_2$
Supply specification		
Nominal voltage (U_N)	V AC (50/60 Hz)	110…230
	V DC	110…230
Rated power AC/DC	VA (50 Hz)/W	2.8/0.9
Operating range	V AC (50 Hz)	90…264
	V DC	90…264
Technical data		
Type of time switch		Weekly
Memory locations for switching times		50
Minimum switching interval	min	1
Accuracy	s/day	1
Communication protocol		NFC
Ambient temperature range	°C	–20…+50
Protection category		IP 20
Approvals (according to type)		

J

Electronic digital time switches
- 1 Weekly time setting


Type 12.71
- 1 CO 16 A
- 17.8 mm wide

- Minimum time interval setting - 1 minute
- Internal battery for set-up without supply
- Pulse output function:
  1 s…59:59(mm:ss)
- Automatic adjustment for daylight saving
- 35 mm rail (EN 60715) mount

12.71



- Digital weekly time switch
- 1 CO 16 A
- 17.8 mm wide



For outline drawing see page 16

Contact specification			
Contact configuration		1 CO (SPDT)	
Rated current/Maximum peak current	A	16/30	
Rated voltage/ Maximum switching voltage	V AC	250/—	
Rated load AC1	VA	4000	
Rated load AC15 (230 V AC)	VA	420	
Nominal lamp rating:			
230 V incandescent/halogen	W	400	
fluorescent tubes with electronic ballast	W	100	
fluorescent tubes with electromagnetic ballast	W	100	
CFL	W	50	
230 V LED	W	50	
LV halogen or LED with electronic ballast	W	50	
LV halogen or LED with electromagnetic ballast	W	100	
Minimum switching load	mW (V/mA)	1000 (10/10)	
Standard contact material		AgNi	
Supply specification			
Nominal voltage (U_N)	V AC (50/60 Hz)	—	230
	V AC/DC	24	—
Rated power AC/DC	VA (50 Hz)/W	1.4/1.4	2/—
Operating range	AC (50 Hz)	$(0.9…1.1)U_N$	$(0.85…1.1)U_N$
	DC	$(0.9…1.1)U_N$	—
Technical data			
Electrical life at rated load in AC1	cycles	$50 \cdot 10^3$	
Type of time switch		weekly	
Memory locations for switching times*		30	
Minimum switching interval	min	1	
Accuracy	s/day	0.5	
Ambient temperature range	°C	–30…+55	
Protection category		IP 20	
Approvals (according to type)		CE UK CA EAC	

* Switching times in memory may be used more than once i.e. when selected for different days.

XI-2025, www.findernet.com

Ordering information

Example: 12 series digital (analogue style) time switch, 1 CO 16 A contact, (110…230)V AC/DC supply

1 2 . 5 1 . 8 . 2 3 0 . 0 0 0 0

Series

Type
0 = Daily, 35.8 mm wide
1 = Daily, 17.5 mm wide
3 = Daily or Weekly, 72 x 72 mm
5 = Digital (analogue style), NFC programming, 35 mm wide
6 = Weekly, NFC programming, 35 mm wide
7 = Weekly, 17.5 mm wide
8 = Astro-switch, NFC programming, 35 mm wide
A = Weekly "Astro", NFC programming, 35 mm wide
B = Yearly Astro, Bluetooth 5 and NFC, 35 mm wide
C = Digital weekly astro time switch, 17.5 mm wide

No. of poles
1 = 1 CO (SPDT), 16 A
1 = 1 NO (SPST-NO), 10 A (only 12.C1)
2 = 2 CO (DPDT), 16 A
4 = Analog output: 0-10 V or PWM

Supply version
0 = AC (50/60 Hz)/DC (types 12.61.0.024, 12.A2.0.024, 12.71.0.024)
8 = AC (50/60 Hz)
8 = AC (50/60 Hz)/DC (types 12.51, 12.81, 12.61, 12.62, 12.A1, 12.A2, 12.A4, 12.B2, 12.C1)

Supply voltage
024 = 24 V AC/DC (type 12.71)
024 = 12…24 V AC/DC (types 12.61, 12.A2)
120 = 120 V AC
230 = 230 V AC
230 = (110…230)V AC/DC (types 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.B2, 12.C1)

Option
0 = With power back-up
1 = Without power back-up (type 12.11)
B = Bluetooth (only 12.C1)

Special version
0 = Standard
1 = Standard (12.A4)


Option
0 = Standard
0 = Daily only for 12.31
7 = Weekly only for 12.31

Codes
12.01.8.230.0000
12.11.8.230.0000
12.11.8.230.1000
12.31.8.230.0000
12.31.8.230.0007
12.51.8.230.0000
12.71.0.024.0000
12.71.8.230.0000
12.81.8.230.0000
12.61.0.024.0000
12.61.8.230.0000
12.62.8.230.0000
12.A1.8.230.0000
12.A2.0.024.0000
12.A2.8.230.0000
12.A4.8.230.0010
12.B2.8.230.0000
12.C1.8.230.B000

Technical data

Insulation			12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2	12.C1	12.01, 12.11, 12.31, 12.71	
Dielectric strength between supply and contacts		V AC	4000	3500	4000	
Dielectric strength between open contacts		V AC	1000	—	1000	
Rated impulse voltage (between supply and contacts)		kV/(1.2/50)µs	6	5	6	
Rated impulse voltage (between open contacts)		kV/(1.2/50)µs	1.5	—	1.5	
EMC specifications						
Type of test		**Reference standard**				
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	—	6 kV	
	air discharge	EN 61000-4-2	8 kV	—	8 kV	
Radiated electromagnetic field (80…1000 MHz)		EN 61000-4-3	10 V/m	15 V/m	10 V/m	
Fast transients (burst 5/50 ns, 5 and 100 kHz)		EN 61000-4-4	4 kV	—	4 kV	
Voltage pulses on supply terminals (surge 1.2/50 µs)	common mode	EN 61000-4-5	4 kV	—	2 kV	
	differential mode	EN 61000-4-5	4 kV	—	2 kV	
Radiofrequency common mode voltage (0.15…80 MHz)		EN 61000-4-6	10 V	15 V	10 V	
Voltage dips	70% U_N , 40% U_N	EN 61000-4-11	10 cycles	—	10 cycles	
Short interruptions		EN 61000-4-11	10 cycles	250 cycles	10 cycles	
Radio frequency conducted emissions	0.15…30 MHz	EN 55014	class B	—	class B	
Radiated emissions	30…1000 MHz	EN 55014	class B	—	class B	
Terminals						
Screw torque		Nm	0.8		1.2	
Max. wire size			mm^2	AWG	mm^2	AWG
		solid cable	1 x 6 / 2 x 4	1 x 10 / 2 x 12	1 x 6 / 2 x 4	1 x 10 / 2 x 12
		stranded cable	1 x 4 / 2 x 2.5	1 x 12 / 2 x 14	1 x 6 / 2 x 2.5	1 x 10 / 2 x 14
Wire strip length		mm	9			
Other data						
Power back-up (Battery life)			6 years (12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.71, 12.B2)			
Battery type			CR 2032, 3 V, 230 mAh (12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2) Supercap (12.C1)			
Power back-up			100 h (12.01, 12.11, 12.31 - following 80 h continuous energisation) 7 days (12.C1)			
Power lost to the environment			**12.51, 12.61, 12.81, 12.A1, 12.C1**	**12.62, 12.A2, 12.A4, 12.B2**	**12.01, 12.11, 12.31**	**12.71**
		in stand-by W	0.2	0.2	—	—
		without contact current W	0.9	0.9	1.5	2
		with rated current W	1.5	2.1	2.5	3 (for 1 pole)


L 12 - Rated current v ambient temperature

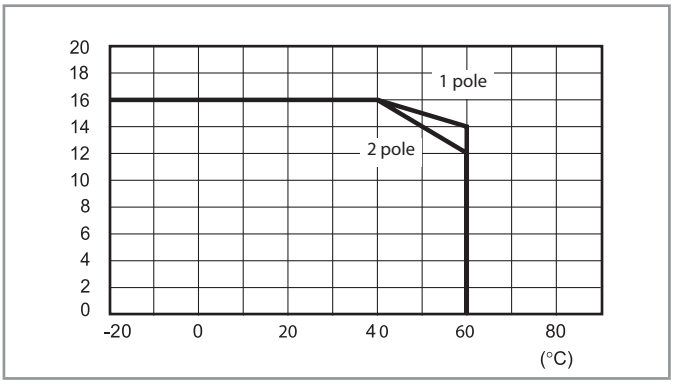

XI-2025, www.findernet.com


Wiring diagrams

Type 12.01

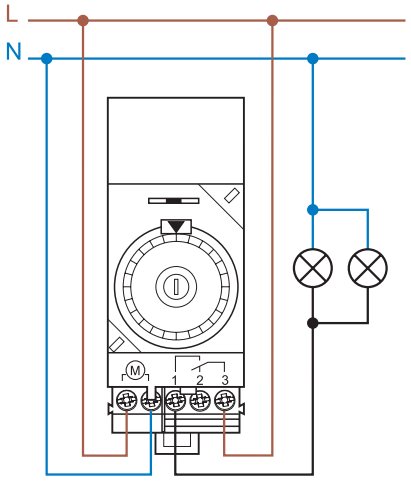


Selector switch:
⏻ = Permanently OFF
AUTO = Automatic
I = Permanently ON

Type 12.11

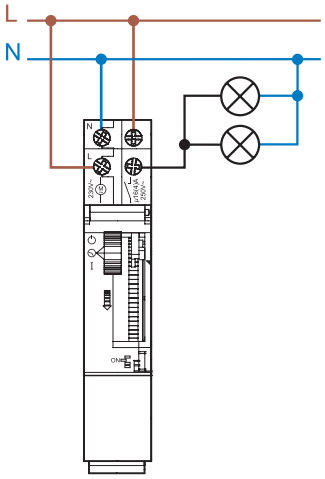


Selector switch:
⏻ = Permanently OFF
⊘ = Automatic
I = Permanently ON


Type 12.31

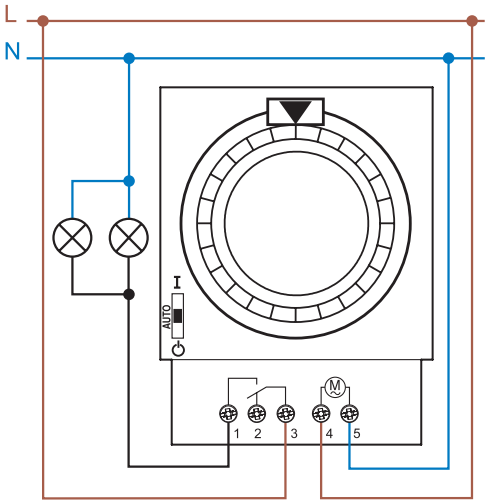

Type 12.71

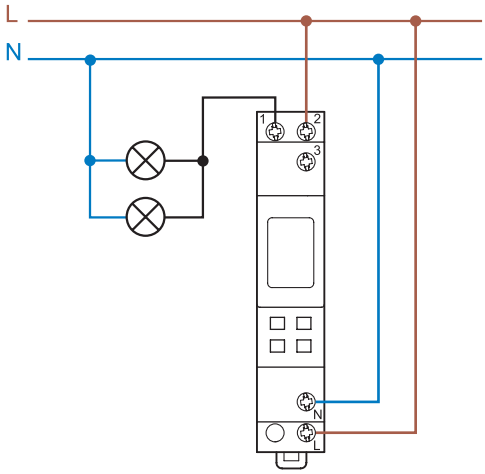

Type 12.51 and 12.81

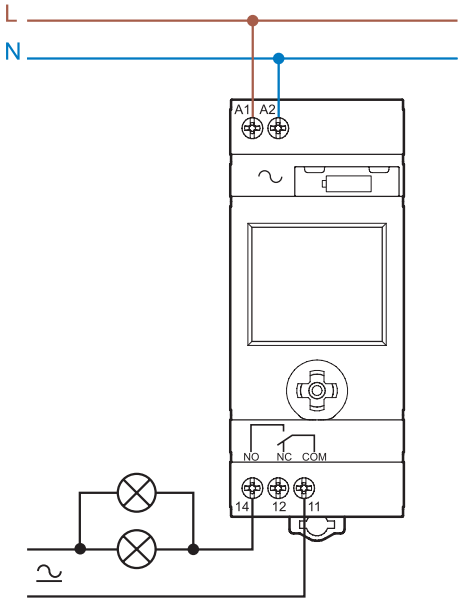


J


XI-2025, www.findernet.com

Wiring diagrams


Types 12.61 and 12.A1

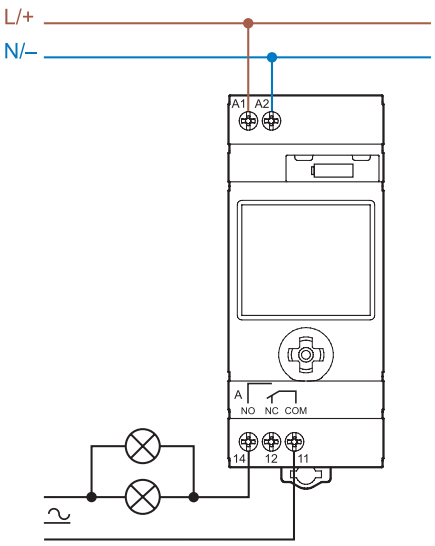

Types 12.62 and 12.A2

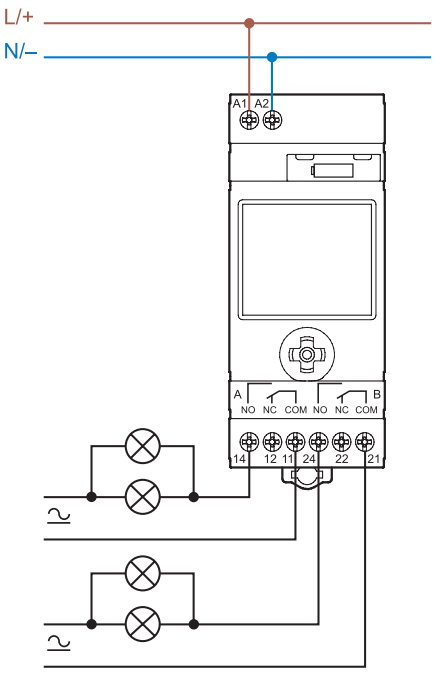



Type 12.B2

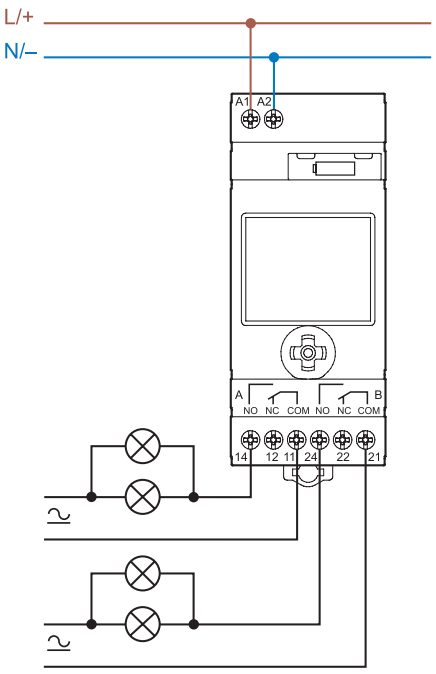

Type 12.A4

NB: All the outputs follow the same programming.

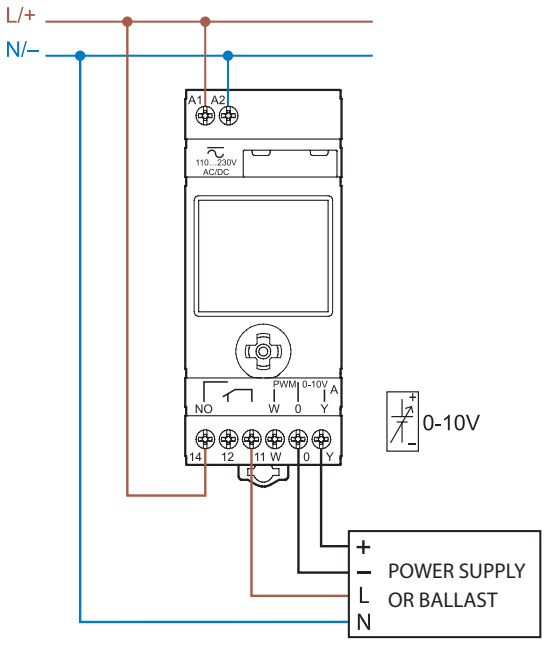

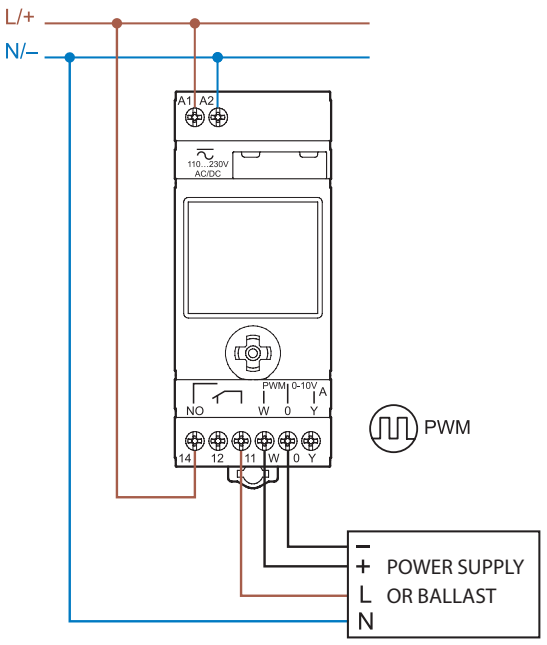


J


XI-2025, www.findernet.com

Wiring diagrams


Type 12.A4 with 15.11
Application example with slave dimmer Type 15.11 (Max. 10)

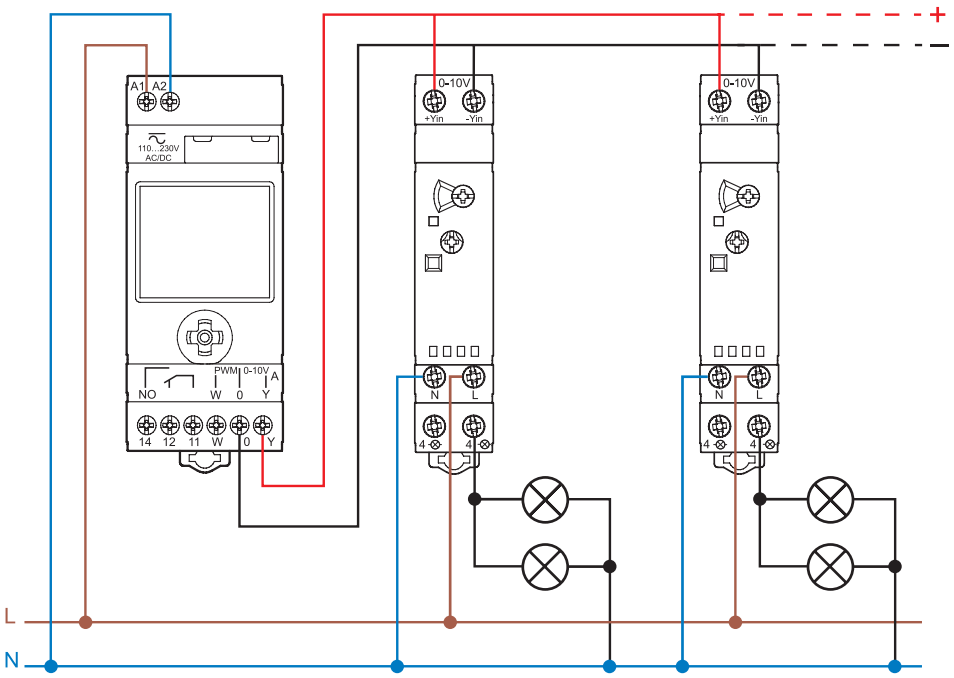

Type 12.C1
B1 push-button on neutral

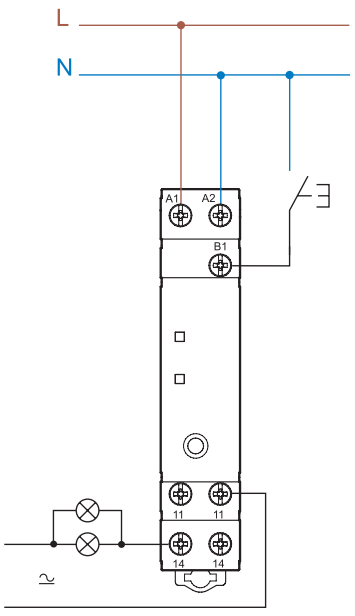


Type 12.C1
B1 push-button on phase

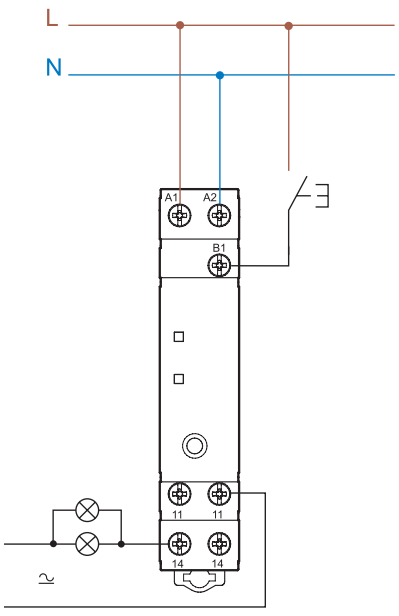

J

Expandability

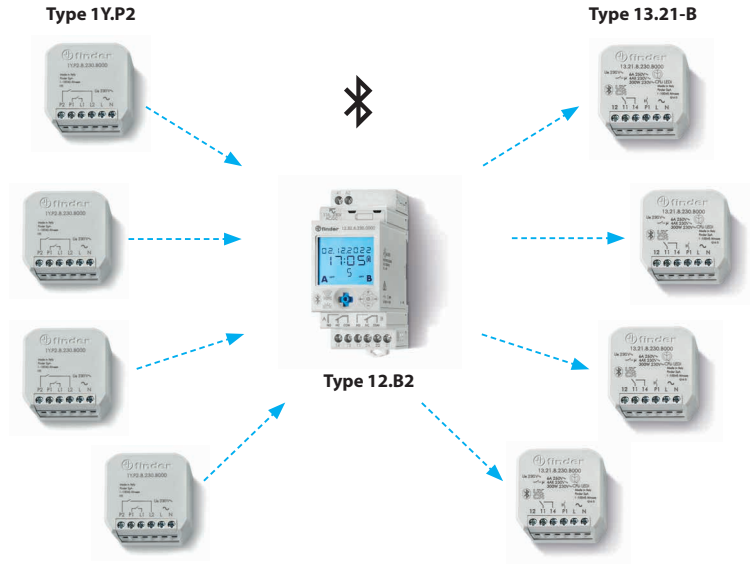

Using the maximum number of expansions, you can make up to 6 outputs and 8 inputs out of it



In this application you can use a range extender (Type 1Y.E8) to reach the most distant devices.

J


XI-2025, www.findernet.com

Different programming modes for type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2

"Smart"


Smart mode via smartphones with NFC communication using Finder toolbox NFC, iOS or Android App.







"Classic"


Mode via the joystick

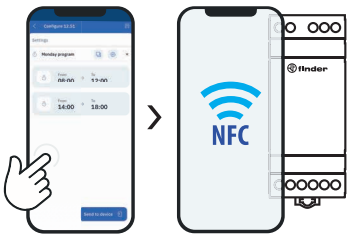



Bluetooth programming (Type 12.B2 and 12.C1 only)

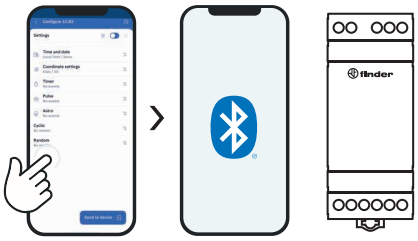




Finder Toolbox for programming
Once the App FINDER Toolbox is downloaded and installed, you can read an existing program, or program your device with maximum flexibility, changing the smallest details and saving your program directly to your smartphone.
At this point you simply touch the time switch with the smartphone to transfer the data.

Finder Toolbox for reference
Finder Toolbox provides all technical data sheets and news from Finder Toolbox.

Functions type 12.81

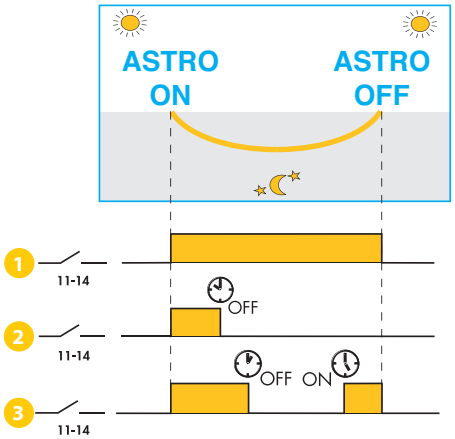

The Override feature permits the 12.81 three different ways of functioning:

1. Classic function where the **AstroON** and **AstroOFF** times are determined by the geographic coordinates. These times vary every day.
2. Functions such that the output turns on according to the **AstroON** time and turns off according to the clock off-time $_{OFF}$. Application example: shop window lighting on by **AstroON** at sunset and off $_{OFF}$ at 00:30 .
3. Functions such that the output turns on according to the **AstroON** time and turns off a ccording to the clock off-time $_{OFF}$, and then turns back on at the clock on-time $_{ON}$ (for the remainder of the ASTRO time period). Application example: company car park lighting, on by **AstroON** at sunset, off end of the evening shift at 23:00 $_{OFF}$.
   On again at the beginning of the morning shift at 5:00 $_{ON}$ and off automatically by **AstroOFF***.


* Depending on the time of year (summer specifically) it may be that the override ON time will fall after the AstroOFF time. In this case, the output switches off at the AstroOFF time and the override ON time is ignored.

J


XI-2025, www.findernet.com

Outline drawings


Type 12.01
Box clamp

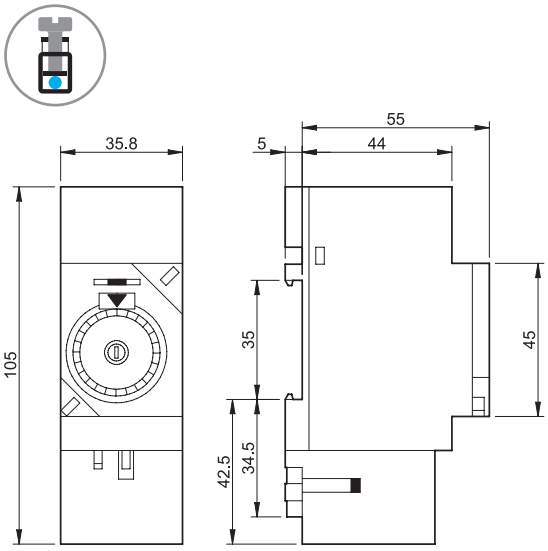


Type 12.11
Box clamp

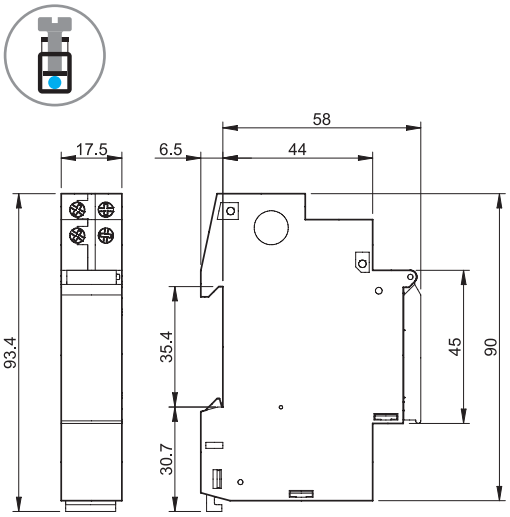


Type 12.31
Box clamp

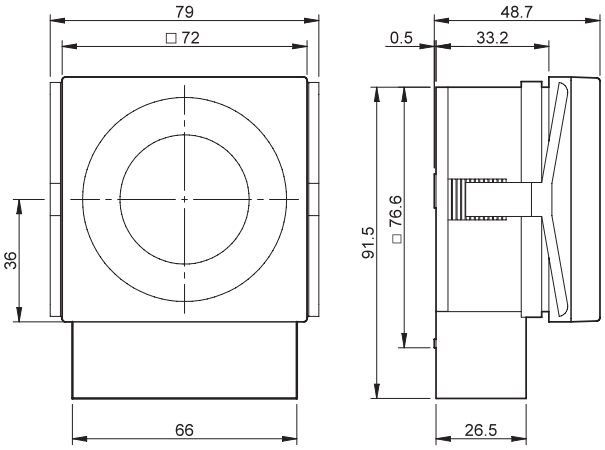


Type 12.71
Box clamp

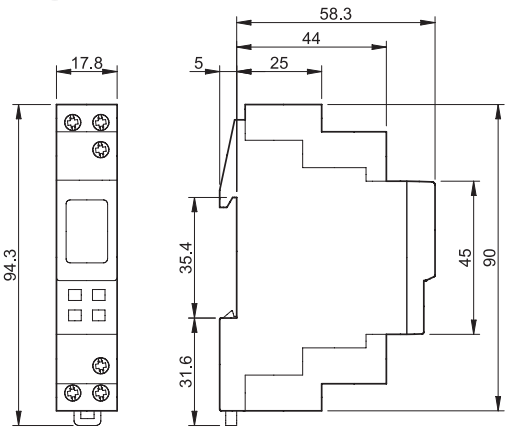


Types 12.51/12.81
Box clamp

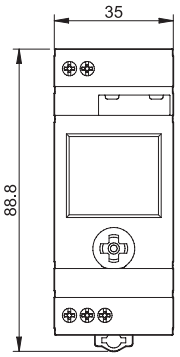


Types 12.61/12.A1
Box clamp

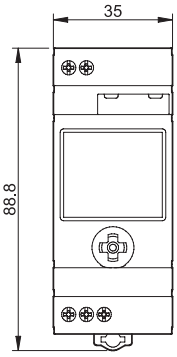

Type 12.B2
Box clamp

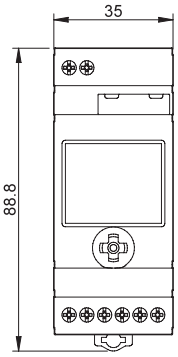

Types 12.62/12.A2/12.A4
Box clamp

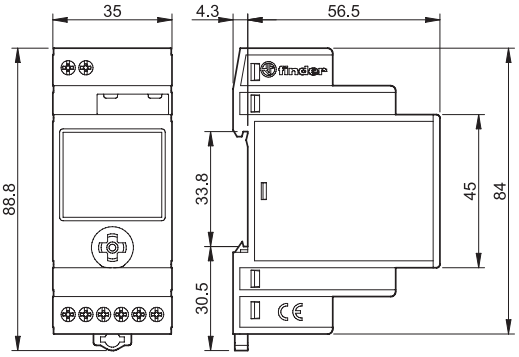


J


XI-2025, www.findernet.com

Outline drawings

Type 12.C1
Box clamp

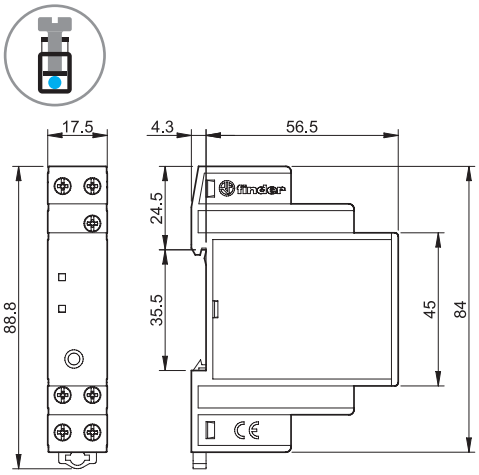


Battery replacement type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2

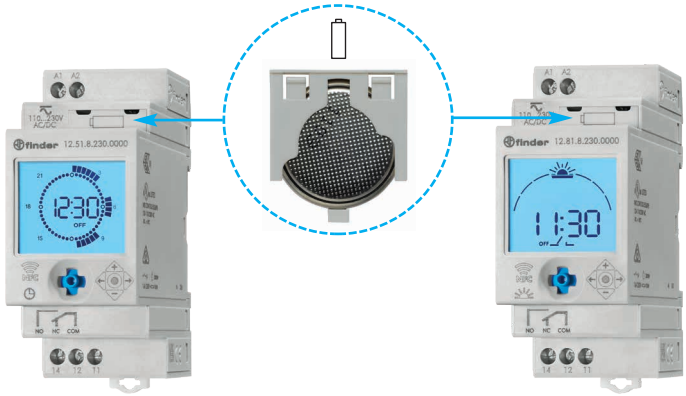

Power-save mode

If the 230 V AC supply is not connected, the time switch enters power-save mode: only the clock is maintained active whilst the display turns off so as to guarantee a long life for the built-in back-up battery.
With a press to the joystick it is possible to "awake" the device and enter Display mode (with the "plug" symbol displayed). A further press to ◎ will enter the program or set-up mode as explained in the Display mode section above.
After about 1 minute of inactivity the power-save mode will start again. During program or set-up the current absorption is higher than in power-save mode, thus influencing the battery life.
In this mode the display back-light is not active. It is activated following a press to the joystick only with the 230 V AC supply connected, but after about 1 minute of inactivity the display back-light will turn off, and to activate it again it is necessary to press the joystick again.
Note: the output relay only functions if the power supply is connected.




J

Accessories type 12.51, 12.61, 12.62, 12.81, 12.A1, 12.A2, 12.A4, 12.B2



011.01


Adaptor for panel mounting, 35 mm wide | 011.01

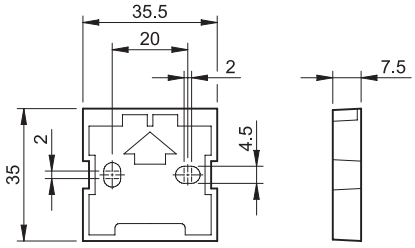





012.BG.8.230

GPS external antenna, this thevice synchronizes the 12.B2s, 12.C1 time and date via Bluetooth.
GPS excluded for countries: Russia and Iran. | 012.BG.8.230

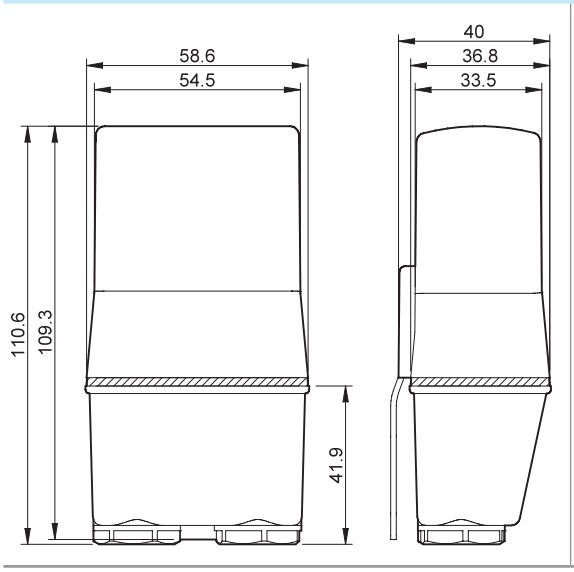

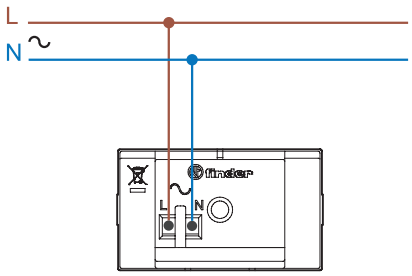

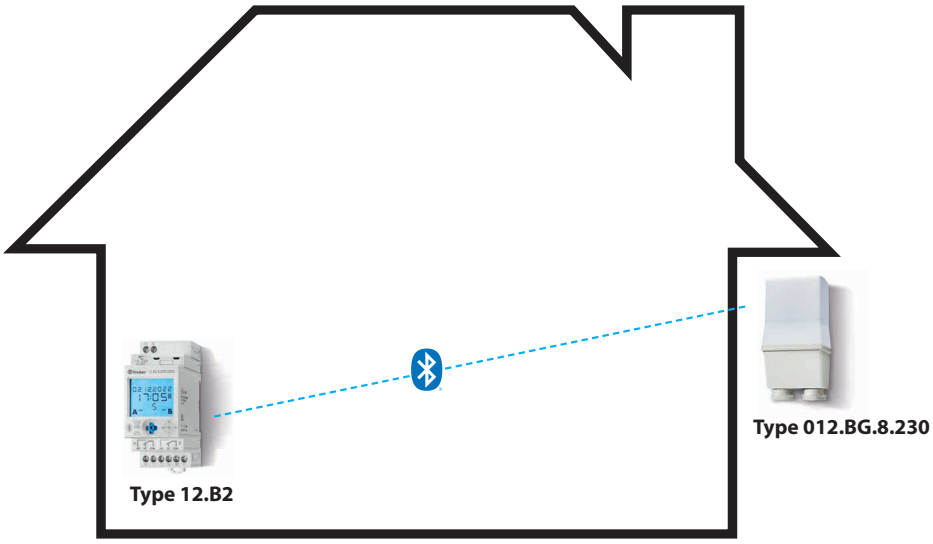

- The 12.B2 is designed to be installed in a cabinet, while the external antenna takes care of the constant time synchronization.
- There is no limit of 12.B2 for a single antenna, the only important parameter is the range of action of the Bluetooth.
- Install the antenna outside, close to a window or the external wall.