LMV796/LMV796Q/LMV797 17 MHz, Low Noise, CMOS Input, 1.8V Operational Amplifiers

Check for Samples: LMV796, LMV797

FEATURES

(Typical 5V Supply, Unless Otherwise Noted)

- **Input Referred Voltage Noise 5.8 nV/√Hz**
- **Input Bias Current 100 fA**
- **Unity Gain Bandwidth 17 MHz**
- **Supply Current per Channel**
  - **LMV796/LMV796Q 1.15 mA**
  - **LMV797 1.30 mA**
- **Rail-to-Rail Output Swing**
  - **@ 10 kΩ Load 25 mV from Rail**
  - **@ 2 kΩ Load 45 mV from Rail**
- **Guaranteed 2.5V and 5.0V Performance**
- **Total Harmonic Distortion 0.01% @ 1kHz, 600Ω**
- **Temperature Range −40°C to 125°C**
- **LMV796Q is an Automotive Grade Product that is AEC-Q100 Grade 1 Qualified and is Manufactured on an Automotive Grade Flow.**

APPLICATIONS

- **Photodiode Amplifiers**
- **Active Filters and Buffers**
- **Low Noise Signal Processing**
- **Medical Instrumentation**
- **Sensor Interface Applications**
- **Automotive**

DESCRIPTION

The LMV796/LMV796Q (Single) and the LMV797 (Dual) low noise, CMOS input operational amplifiers offer a low input voltage noise density of 5.8 nV/√Hz while consuming only 1.15 mA (LMV796/LMV796Q) of quiescent current. The LMV796/LMV796Q and LMV797 are unity gain stable op amps and have gain bandwidth of 17 MHz. The LMV796/LMV796Q/LMV797 have a supply voltage range of 1.8V to 5.5V and can operate from a single supply. The LMV796/LMV796Q/LMV797 each feature a rail-to-rail output stage capable of driving a 600Ω load and sourcing as much as 60 mA of current.

The LMV796/LMV796Q family provides optimal performance in low voltage and low noise systems. A CMOS input stage, with typical input bias currents in the range of a few femtoAmperes, and an input common mode voltage range, which includes ground, make the LMV796/LMV796Q and the LMV797 ideal for low power sensor applications.

The LMV796/LMV796Q/LMV797 are manufactured using TI's advanced VIP50 process. The LMV796/LMV796Q are offered in 5–pin SOT-23 package. The LMV797 is offered in 8–pin VSSOP package.

Typical Application

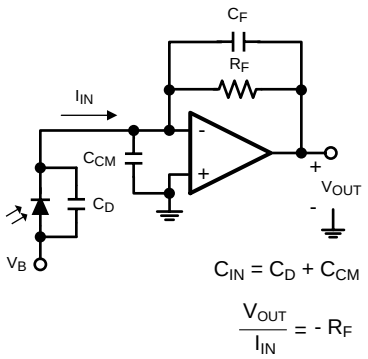


Figure 1. Photodiode Transimpedance Amplifier

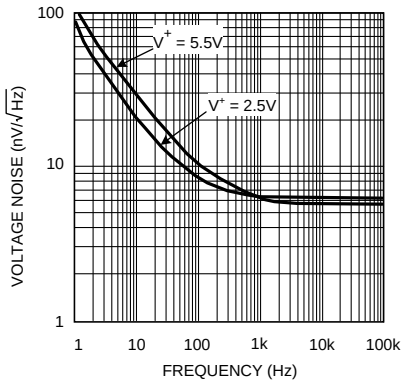


Figure 2. Input Referred Voltage Noise vs. Frequency

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2006–2011, Texas Instruments Incorporated

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings(1)(2)

ESD Tolerance(3)	Human Body Model	2000V
	Machine Model	200V
	Charge-Device Model	1000V
V_{IN} Differential		±0.3V
Supply Voltage ($V^+ - V^-$)		6.0V
Input/Output Pin Voltage		V^+ +0.3V, V^- −0.3V
Storage Temperature Range		−65°C to 150°C
Junction Temperature(4)		+150°C
Soldering Information	Infrared or Convection (20 sec)	235°C
	Wave Soldering Lead Temperature (10 sec)	260°C

(1) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the *Electrical Characteristics* tables.
(2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
(3) Human Body Model is 1.5kΩ in series with 100pF. Machine Model is 0Ω in series with 200pF.
(4) The maximum power dissipation is a function of T_{JMAX}, θ_{JA}. The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{JMAX} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC Board.

Operating Ratings(1)

Temperature Range(2)		−40°C to 125°C
Supply Voltage ($V^+ - V^-$)	−40°C ≤ T_A ≤ 125°C	2.0V to 5.5V
	0°C ≤ T_A ≤ 125°C	1.8V to 5.5V
Package Thermal Resistance (θ_{JA})(2)	5-Pin SOT-23	180°C/W
	8-Pin VSSOP	236°C/W

(1) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the *Electrical Characteristics* tables.
(2) The maximum power dissipation is a function of T_{JMAX}, θ_{JA}. The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{JMAX} - T_A) / \theta_{JA}$. All numbers apply for packages soldered directly onto a PC Board.

2.5V Electrical Characteristics

Unless otherwise specified, all limits are guaranteed for T_A = 25°C, V^+ = 2.5V, V^- = 0V, $V_{CM} = V^+/2 = V_O$. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions		Min (1)	Typ (2)	Max (1)	Units
V_{OS}	Input Offset Voltage				0.1	±1.35 **±1.65**	mV
TC V_{OS}	Input Offset Voltage Temperature Drift	LMV796/LMV796Q(3)			−1.0		µV/°C
		LMV797(3)			−1.8		
I_B	Input Bias Current	V_{CM} = 1.0V(4) (5)	−40°C ≤ T_A ≤ 85°C		0.05	1 **25**	pA
			−40°C ≤ T_A ≤ 125°C		0.05	1 **100**	
I_{OS}	Input Offset Current	V_{CM} = 1.0V(5)			10		fA

(1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using the statistical quality control (SQC) method.
(2) Typical values represent the parametric norm at the time of characterization.
(3) Offset voltage average drift is determined by dividing the change in V_{OS} by temperature change.
(4) Positive current corresponds to current flowing into the device.
(5) This parameter is guaranteed by design and/or characterization and is not tested in production.

Copyright © 2006–2011, Texas Instruments Incorporated

2.5V Electrical Characteristics (continued)

Unless otherwise specified, all limits are guaranteed for T_A = 25°C, V^+ = 2.5V, V^- = 0V, V_{CM} = $V^+/2$ = V_O. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions		Min (1)	Typ (2)	Max (1)	Units
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 1.4V		80 **75**	94		dB
PSRR	Power Supply Rejection Ratio	2.0V ≤ V^+ ≤ 5.5V, V_{CM} = 0V		80 **75**	100		dB
		1.8V ≤ V^+ ≤ 5.5V, V_{CM} = 0V		80	98		
CMVR	Common Mode Voltage Range	CMRR ≥ 60 dB CMRR ≥ 55 dB		−0.3 **-0.3**		1.5 **1.5**	V
A_{VOL}	Open Loop Voltage Gain	V_{OUT} = 0.15V to 2.2V, R_{LOAD} = 2 kΩ to $V^+/2$	LMV796/LMV796Q	85 **80**	98		dB
			LMV797	82 **78**	92		
		V_{OUT} = 0.15V to 2.2V, R_{LOAD} = 10 kΩ to $V^+/2$		88 **84**	110		
V_{OUT}	Output Voltage Swing High	R_{LOAD} = 2 kΩ to $V^+/2$			25	75 **82**	mV from either rail
		R_{LOAD} = 10 kΩ to $V^+/2$			20	65 **71**	
	Output Voltage Swing Low	R_{LOAD} = 2 kΩ to $V^+/2$			30	75 **78**	
		R_{LOAD} = 10 kΩ to $V^+/2$			15	65 **67**	
I_{OUT}	Output Current	Sourcing to V^- V_{IN} = 200 mV (6)		35 **28**	47		mA
		Sinking to V^+ V_{IN} = –200 mV (6)		7 **5**	15		
I_S	Supply Current per Amplifier	LMV796/LMV796Q			0.95	1.30 **1.65**	mA
		LMV797 per channel			1.1	1.50 **1.85**	
SR	Slew Rate	A_V = +1, Rising (10% to 90%)			8.5		V/µs
		A_V = +1, Falling (90% to 10%)			10.5		
GBW	Gain Bandwidth				14		MHz
e_n	Input Referred Voltage Noise Density	f = 1 kHz			6.2		nV/√Hz
i_n	Input Referred Current Noise Density	f = 1 kHz			0.01		pA/√Hz
THD+N	Total Harmonic Distortion + Noise	f = 1 kHz, A_V = 1, R_{LOAD} = 600Ω			0.01		%

(6) The short circuit test is a momentary test, the short circuit duration is 1.5ms.

5V Electrical Characteristics

Unless otherwise specified, all limits are guaranteed for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = $V^+/2$ = V_O. **Boldface** limits apply at the temperature extremes.

Symbol	Parameter	Conditions	Min (1)	Typ (2)	Max (1)	Units
V_{OS}	Input Offset Voltage			0.1	±1.35 **±1.65**	mV
TC V_{OS}	Input Offset Voltage Temperature Drift	LMV796/LMV796Q (3)		−1.0		µV/°C
		LMV797 (3)		−1.8		

(1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are guaranteed through correlations using the statistical quality control (SQC) method.
(2) Typical values represent the parametric norm at the time of characterization.
(3) Offset voltage average drift is determined by dividing the change in V_{OS} by temperature change.

Copyright © 2006–2011, Texas Instruments Incorporated

5V Electrical Characteristics (continued)

Unless otherwise specified, all limits are guaranteed for T_A = 25°C, V^+ = 5V, V^- = 0V, V_{CM} = $V^+/2$ = V_O. **Boldface** limits apply at the temperature extremes.

I_B	Input Bias Current	V_{CM} = 2.0V (4) (5)	−40°C ≤ T_A ≤ 85°C		0.1	1 **25**	pA
			−40°C ≤ T_A ≤ 125°C		0.1	1 **100**	
I_{OS}	Input Offset Current	V_{CM} = 2.0V (5)			10		fA
CMRR	Common Mode Rejection Ratio	0V ≤ V_{CM} ≤ 3.7V		80 **75**	100		dB
PSRR	Power Supply Rejection Ratio	2.0V ≤ V^+ ≤ 5.5V, V_{CM} = 0V		80 **75**	100		dB
		1.8V ≤ V^+ ≤ 5.5V, V_{CM} = 0V		80	98		
CMVR	Common Mode Voltage Range	CMRR ≥ 60 dB CMRR ≥ 55 dB		−0.3 **-0.3**		4 **4**	V
A_{VOL}	Open Loop Voltage Gain	V_{OUT} = 0.3V to 4.7V, R_{LOAD} = 2 kΩ to $V^+/2$	LMV796/LMV796Q	85 **80**	97		dB
			LMV797	82 **78**	89		
		V_{OUT} = 0.3V to 4.7V, R_{LOAD} = 10 kΩ to $V^+/2$		88 **84**	110		
V_{OUT}	Output Voltage Swing High	R_{LOAD} = 2 kΩ to $V^+/2$			35	75 **82**	mV from either rail
		R_{LOAD} = 10 kΩ to $V^+/2$			25	65 **71**	
	Output Voltage Swing Low	R_{LOAD} = 2 kΩ to $V^+/2$	LMV796/LMV796Q		42	75 **78**	
			LMV797		45	80 **83**	
		R_{LOAD} = 10 kΩ to $V^+/2$			20	65 **67**	
I_{OUT}	Output Current	Sourcing to V^- V_{IN} = 200 mV (6)		45 **37**	60		mA
		Sinking to V^+ V_{IN} = –200 mV (6)		10 **6**	21		
I_S	Supply Current per Amplifier	LMV796/LMV796Q			1.15	1.40 **1.75**	mA
		LMV797per channel			1.30	1.70 **2.05**	
SR	Slew Rate	A_V = +1, Rising (10% to 90%)		6.0	9.5		V/µs
		A_V = +1, Falling (90% to 10%)		7.5	11.5		
GBW	Gain Bandwidth				17		MHz
e_n	Input Referred Voltage Noise Density	f = 1 kHz			5.8		nV/√Hz
i_n	Input Referred Current Noise Density	f = 1 kHz			0.01		pA/√Hz
THD+N	Total Harmonic Distortion + Noise	f = 1 kHz, A_V = 1, R_{LOAD} = 600Ω			0.01		%

(4) Positive current corresponds to current flowing into the device.
(5) This parameter is guaranteed by design and/or characterization and is not tested in production.
(6) The short circuit test is a momentary test, the short circuit duration is 1.5ms.

Copyright © 2006–2011, Texas Instruments Incorporated

Connection Diagram

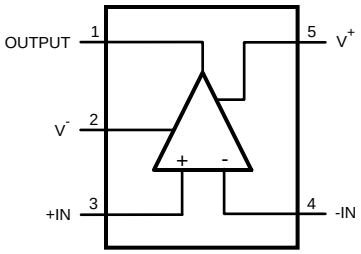


Figure 3. 5-Pin SOT-23
Top View

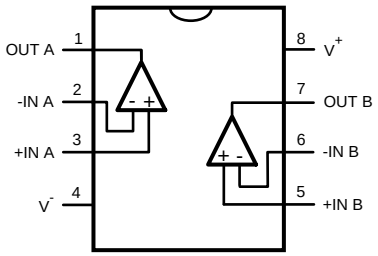


Figure 4. 8-Pin VSSOP
Top View

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Supply Current vs. Supply Voltage (LMV796/LMV796Q)

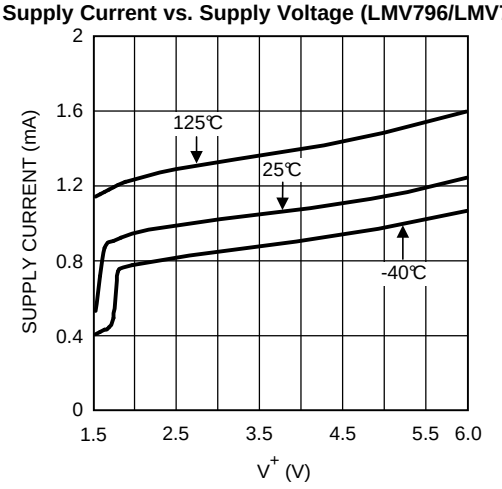


Figure 5.

Supply Current vs. Supply Voltage (LMV797)

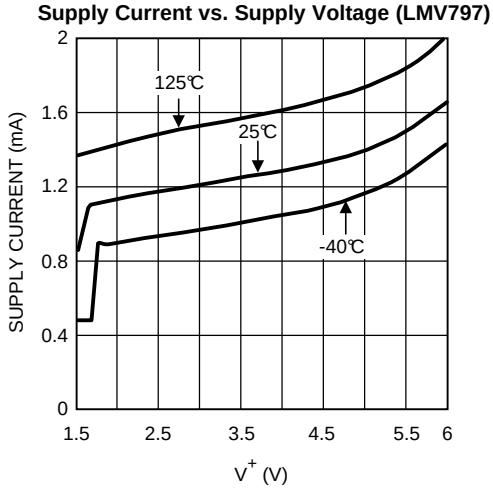


Figure 6.

V_{OS} vs. V_{CM}

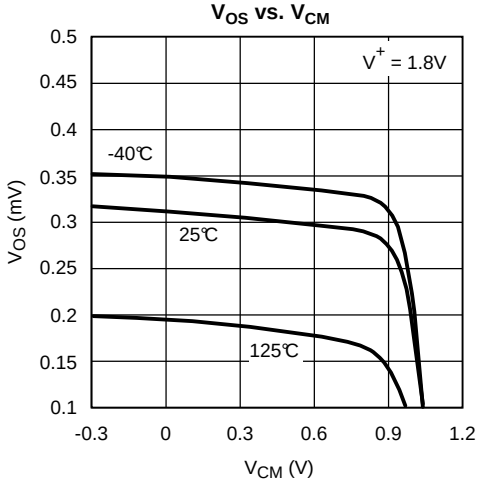


Figure 7.

V_{OS} vs. V_{CM}

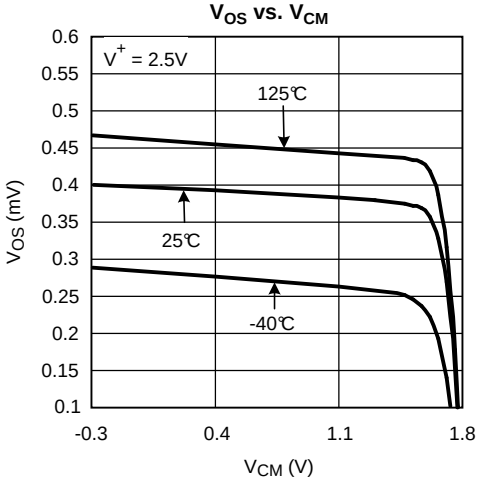


Figure 8.

V_{OS} vs. V_{CM}

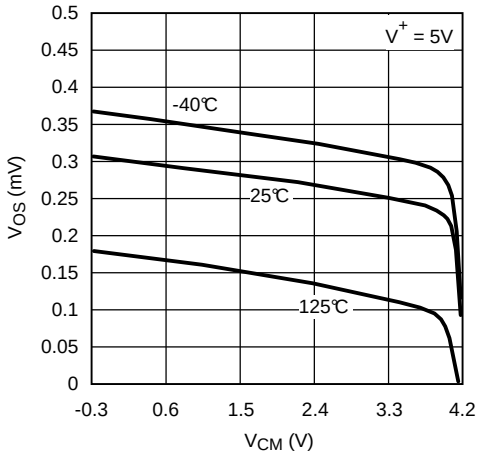


Figure 9.

V_{OS} vs. Supply Voltage

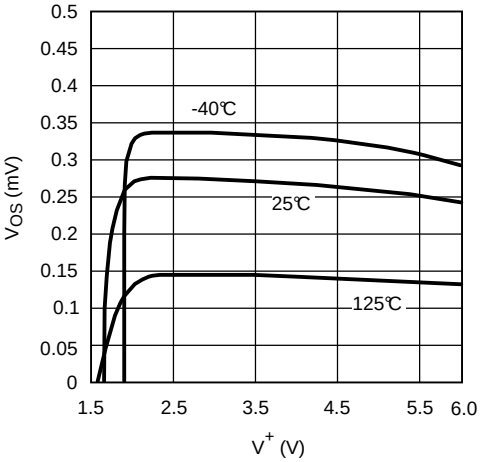


Figure 10.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Slew Rate vs. Supply Voltage

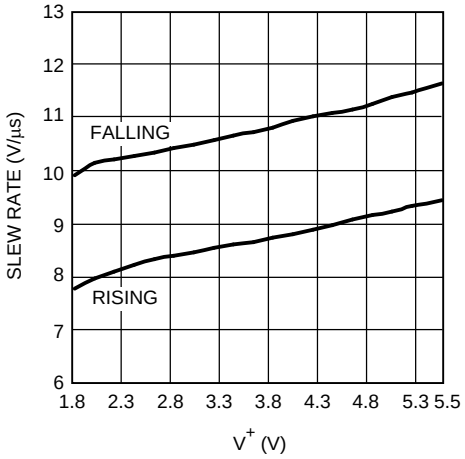


Figure 11.

Input Bias Current vs. V_{CM}

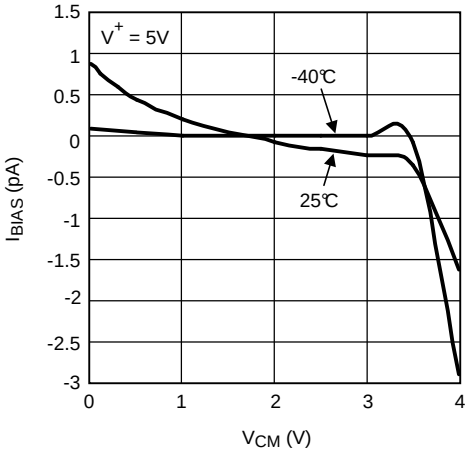


Figure 12.

Input Bias Current vs. V_{CM}

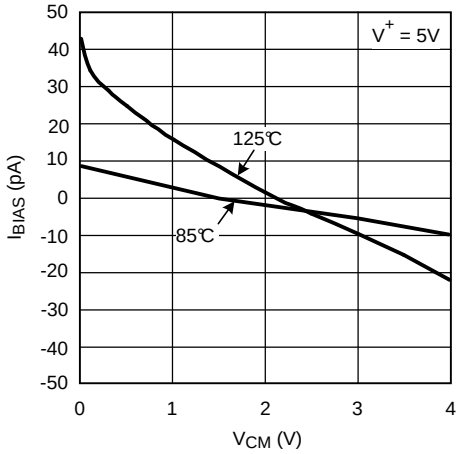


Figure 13.

Sourcing Current vs. Supply Voltage

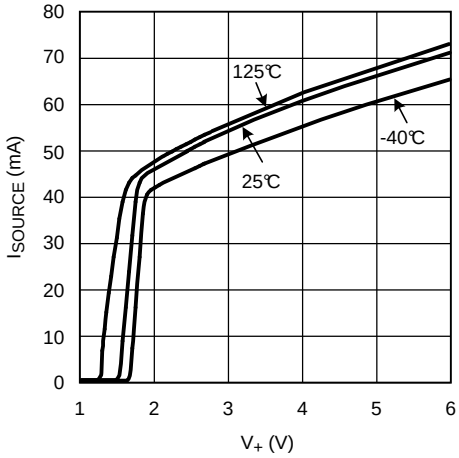


Figure 14.

Sinking Current vs. Supply Voltage

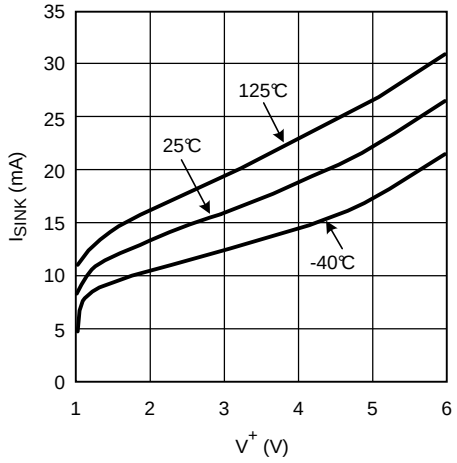


Figure 15.

Sourcing Current vs. Output Voltage

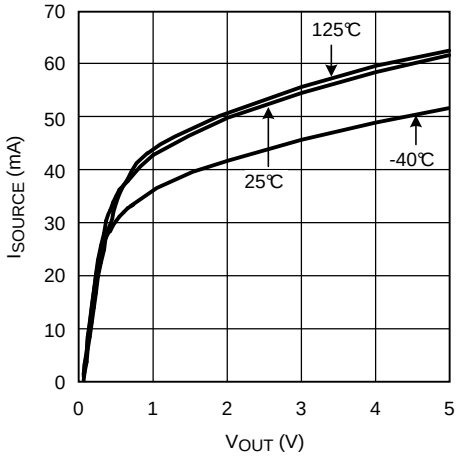


Figure 16.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Sinking Current vs. Output Voltage

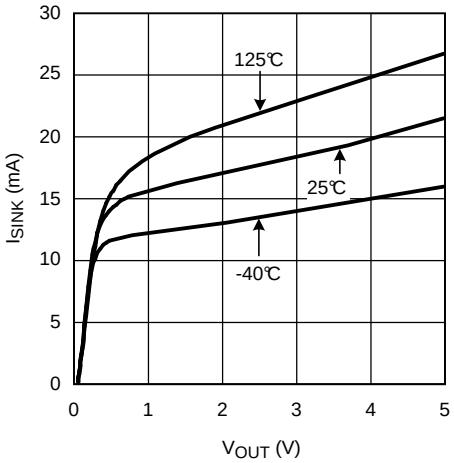


Figure 17.

Positive Output Swing vs. Supply Voltage

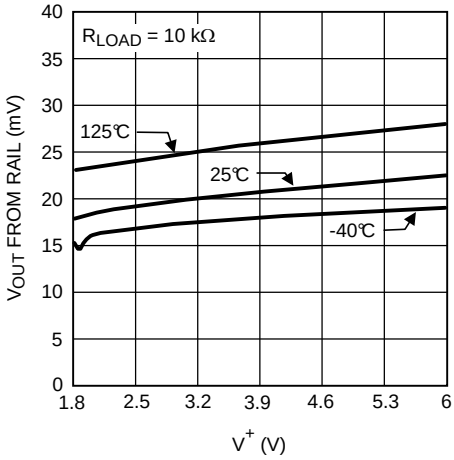


Figure 18.

Negative Output Swing vs. Supply Voltage

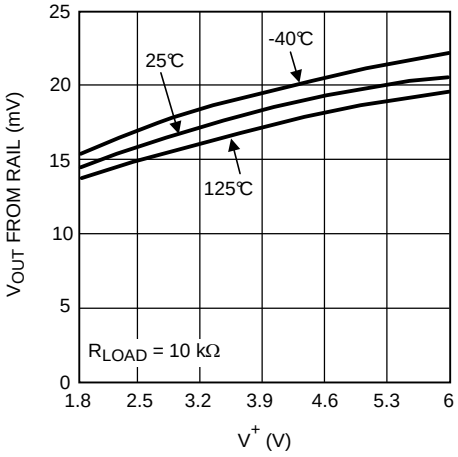


Figure 19.

Positive Output Swing vs. Supply Voltage

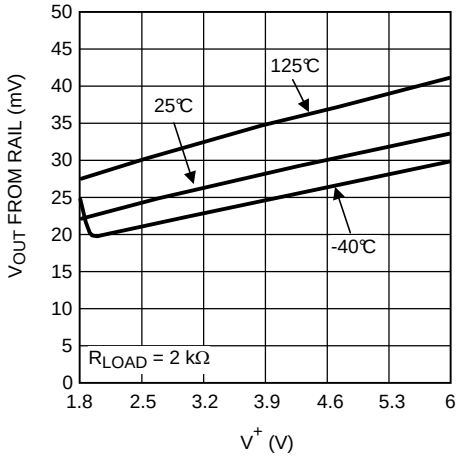


Figure 20.

Negative Output Swing vs. Supply Voltage

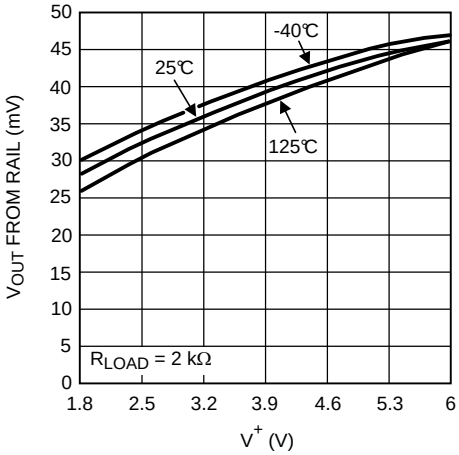


Figure 21.

Positive Output Swing vs. Supply Voltage

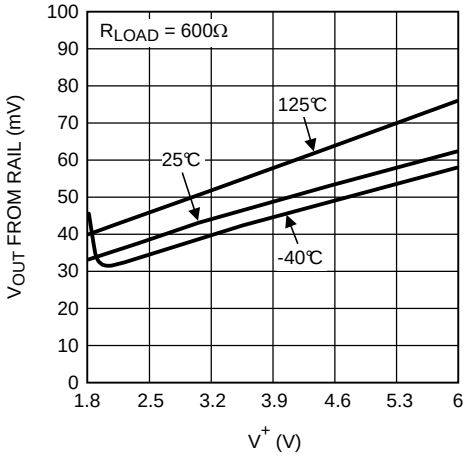


Figure 22.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Negative Output Swing vs. Supply Voltage

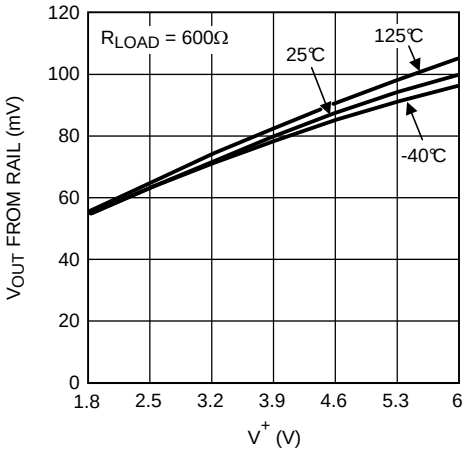


Figure 23.

Time Domain Voltage Noise

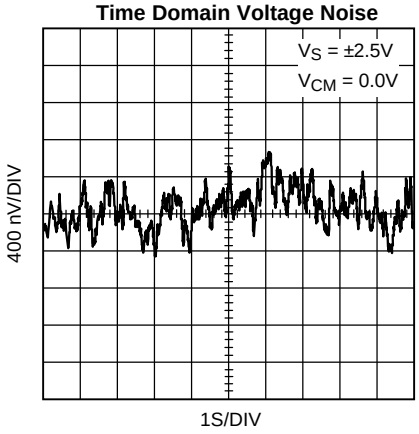


Figure 24.

Input Referred Voltage Noise vs. Frequency

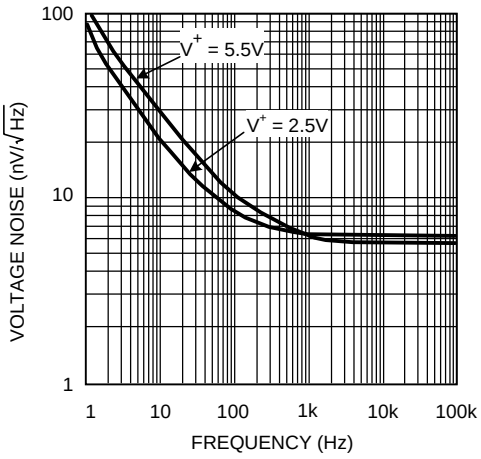


Figure 25.

Overshoot and Undershoot vs. C_{LOAD}

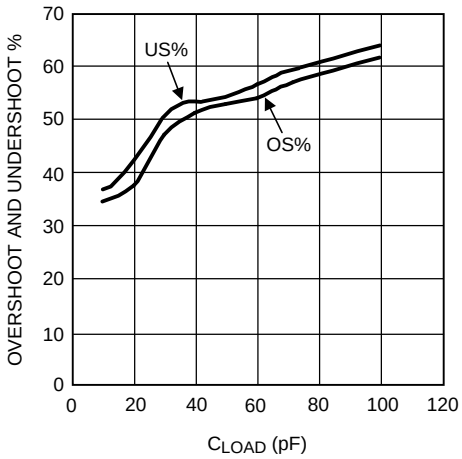


Figure 26.

THD+N vs. Peak-to-Peak Output Voltage (V_{OUT})

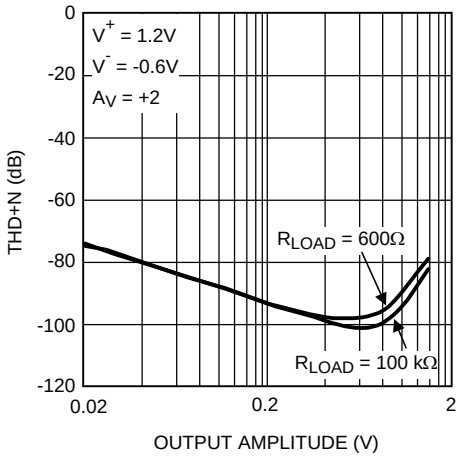


Figure 27.

THD+N vs. Peak-to-Peak Output Voltage (V_{OUT})

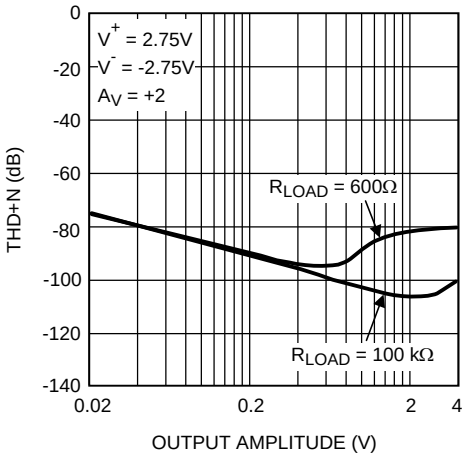


Figure 28.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

THD+N vs. Frequency

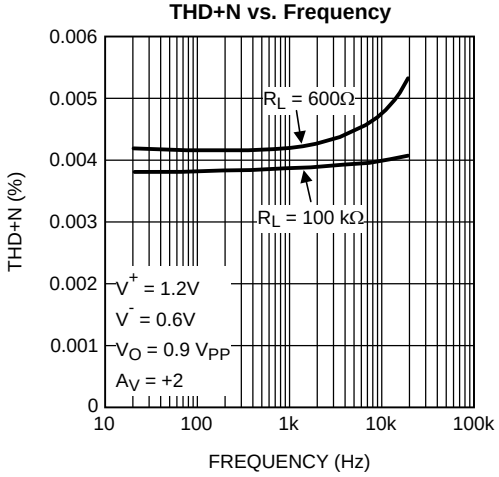


Figure 29.

THD+N vs. Frequency

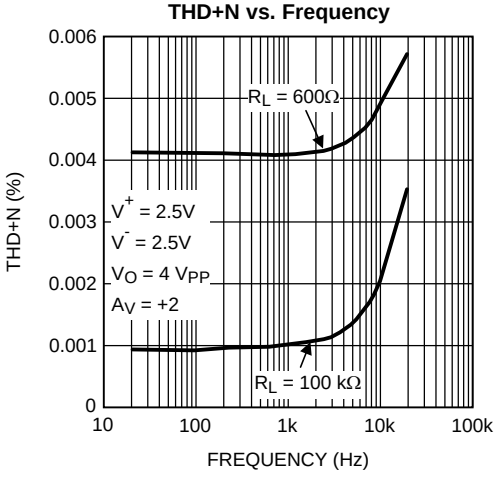


Figure 30.

Open Loop Gain and Phase with Capacitive Load

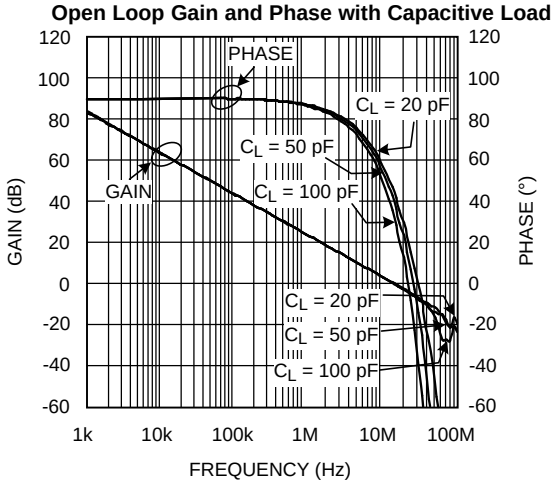


Figure 31.

Open Loop Gain and Phase with Resistive Load

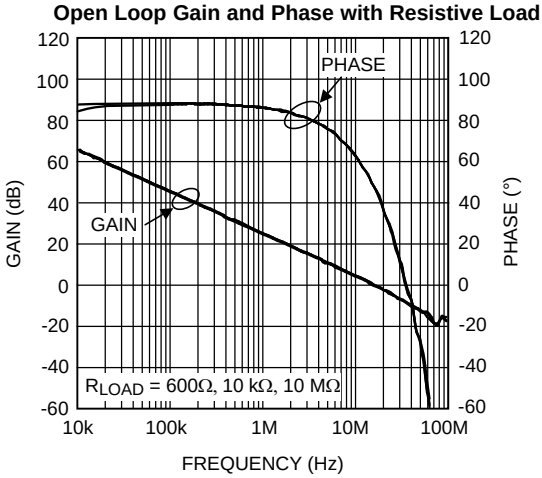


Figure 32.

Closed Loop Output Impedance vs. Frequency

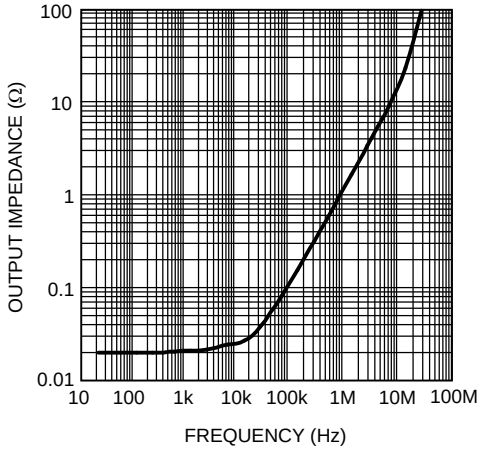


Figure 33.

Crosstalk Rejection

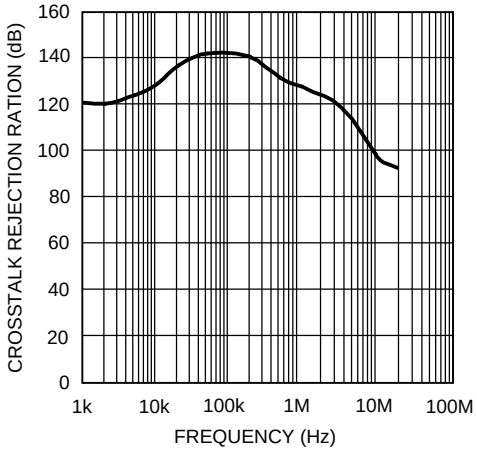


Figure 34.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Small Signal Transient Response, A_V = +1

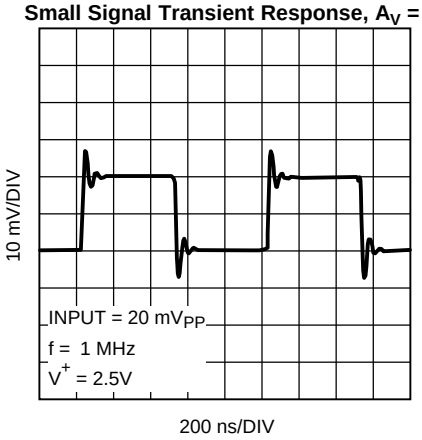


Figure 35.

Large Signal Transient Response, A_V = +1

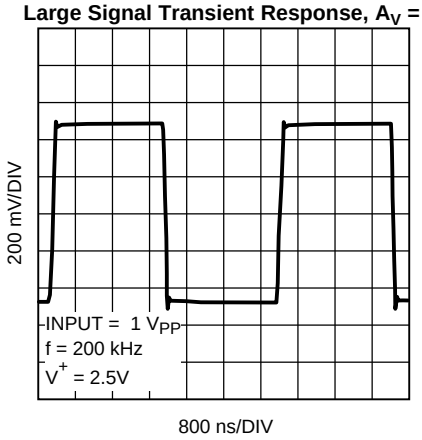


Figure 36.

Small Signal Transient Response, A_V = +1

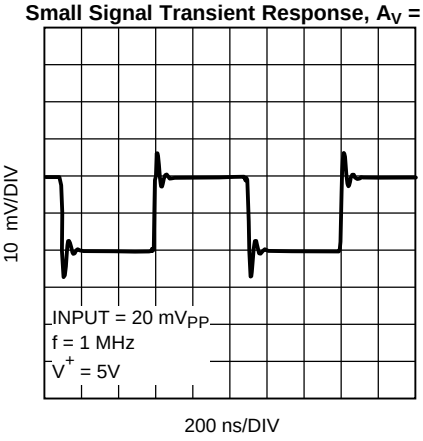


Figure 37.

Large Signal Transient Response, A_V = +1

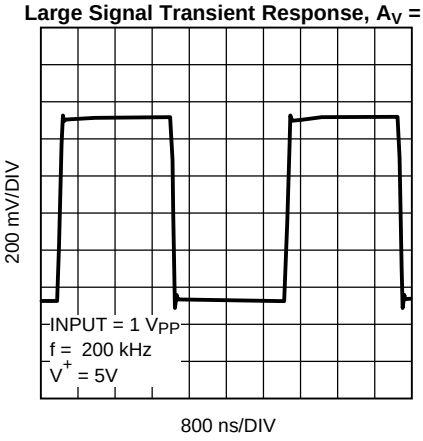


Figure 38.

Phase Margin vs. Capacitive Load (Stability)

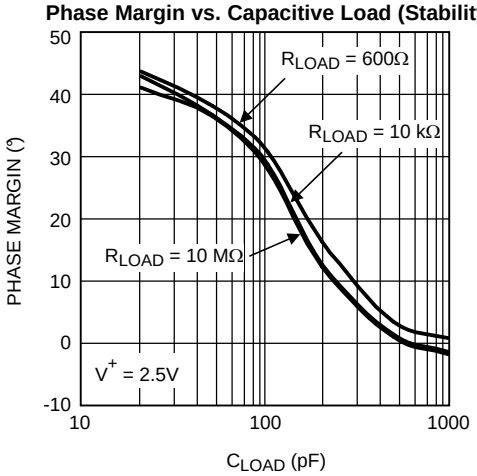


Figure 39.

Phase Margin vs. Capacitive Load (Stability)

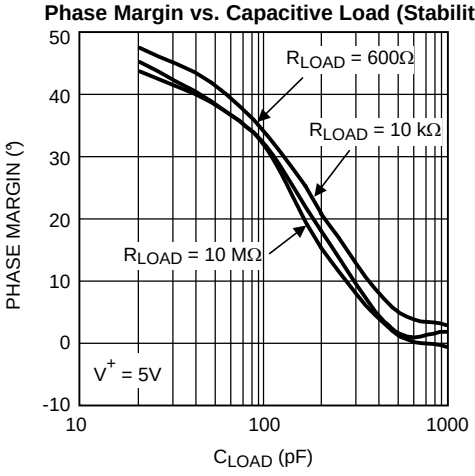


Figure 40.

Copyright © 2006–2011, Texas Instruments Incorporated

Typical Performance Characteristics (continued)

Unless otherwise specified, T_A = 25°C, V^- = 0, V^+ = Supply Voltage = 5V, V_{CM} = V^+/2.

Positive PSRR vs. Frequency

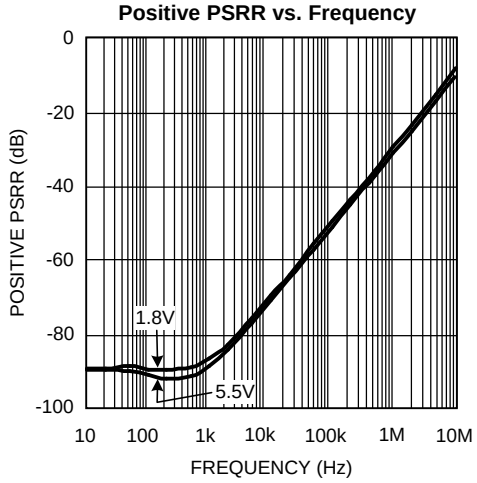


Figure 41.

Negative PSRR vs. Frequency

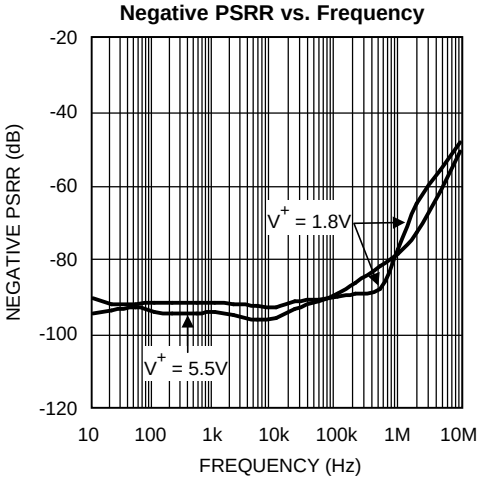


Figure 42.

CMRR vs. Frequency

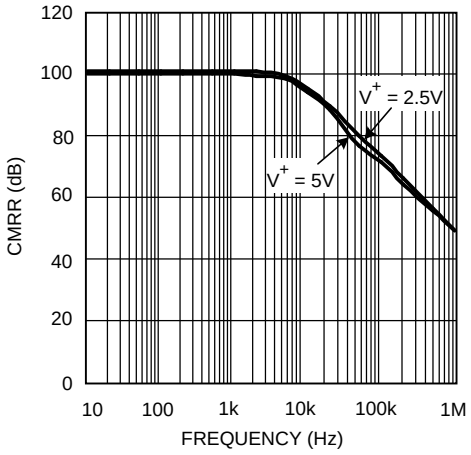


Figure 43.

Input Common Mode Capacitance vs. V_{CM}

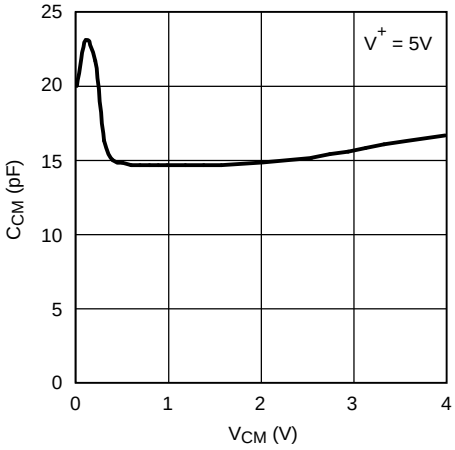


Figure 44.

Copyright © 2006–2011, Texas Instruments Incorporated

APPLICATION INFORMATION

ADVANTAGES OF THE LMV796/LMV797

Wide Bandwidth at Low Supply Current

The LMV796 and LMV797 are high performance op amps that provide a unity gain bandwidth of 17 MHz while drawing a low supply current of 1.15 mA. This makes them ideal for providing wideband amplification in portable applications.

Low Input Referred Noise and Low Input Bias Current

The LMV796/LMV797 have a very low input referred voltage noise density (5.8 nV/√Hz at 1 kHz). A CMOS input stage ensures a small input bias current (100 fA) and low input referred current noise (0.01 pA/√Hz). This is very helpful in maintaining signal fidelity, and makes the LMV796 and LMV797 ideal for audio and sensor based applications.

Low Supply Voltage

The LMV796 and the LMV797 have performance guaranteed at 2.5V and 5V supply. The LMV796 family is guaranteed to be operational at all supply voltages between 2.0V and 5.5V, for ambient temperatures ranging from −40°C to 125°C, thus utilizing the entire battery lifetime. The LMV796 and LMV797 are also guaranteed to be operational at 1.8V supply voltage, for temperatures between 0°C and 125°C. This makes the LMV796 family ideal for usage in low-voltage commercial applications.

RRO and Ground Sensing

Rail-to-rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating at low supply voltages. An innovative positive feedback scheme is used to boost the current drive capability of the output stage. This allows the LMV796 and the LMV797 to source more than 40 mA of current at 1.8V supply. This also limits the performance of the LMV796 family as comparators, and hence the usage of the LMV796 and the LMV797 in an open-loop configuration is not recommended. The input common-mode range includes the negative supply rail which allows direct sensing at ground in single supply operation.

Small Size

The small footprint of the LMV796 and the LMV797 package saves space on printed circuit boards, and enables the design of smaller electronic products, such as cellular phones, pagers, or other portable systems. Long traces between the signal source and the op amp make the signal path susceptible to noise. By using the physically smaller LMV796 or LMV797 package, the op amp can be placed closer to the signal source, reducing noise pickup and increasing signal integrity.

CAPACITIVE LOAD TOLERANCE

The LMV796 and LMV797 can directly drive 120 pF in unity-gain without oscillation. The unity-gain follower is the most sensitive configuration to capacitive loading. Direct capacitive loading reduces the phase margin of amplifiers. The combination of the amplifier's output impedance and the capacitive load induces phase lag. This results in either an underdamped pulse response or oscillation. To drive a heavier capacitive load, the circuit in Figure 45 can be used.

In Figure 45, the isolation resistor R_{ISO} and the load capacitor C_L form a pole to increase stability by adding more phase margin to the overall system. The desired performance depends on the value of R_{ISO}. The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. Increased R_{ISO} would, however, result in a reduced output swing and short circuit current.





Figure 45. Isolation of C_L to Improve Stability

Copyright © 2006–2011, Texas Instruments Incorporated

INPUT CAPACITANCE AND FEEDBACK CIRCUIT ELEMENTS

The LMV796 family has a very low input bias current (100 fA) and a low 1/f noise corner frequency (400 Hz), which makes it ideal for sensor applications. However, to obtain this performance a large CMOS input stage is used, which adds to the input capacitance of the op amp, C_{IN}. Though this does not affect the DC and low frequency performance, at higher frequencies the input capacitance interacts with the input and the feedback impedances to create a pole, which results in lower phase margin and gain peaking. This can be controlled by being selective in the use of feedback resistors, as well as, by using a feedback capacitance, C_F. For example, in the inverting amplifier shown in Figure 46, if C_{IN} and C_F are ignored and the open loop gain of the op amp is considered infinite then the gain of the circuit is $-R_2/R_1$. An op amp, however, usually has a dominant pole, which causes its gain to drop with frequency. Hence, this gain is only valid for DC and low frequency. To understand the effect of the input capacitance coupled with the non-ideal gain of the op amp, the circuit needs to be analyzed in the frequency domain using a Laplace transform.

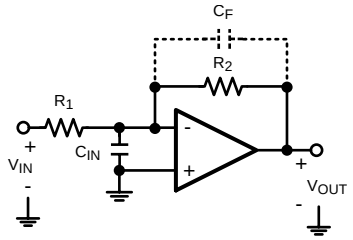

$$A_V = -\frac{V_{OUT}}{V_{IN}} = -\frac{R_2}{R_1}$$

Figure 46. Inverting Amplifier

For simplicity, the op amp is modeled as an ideal integrator with a unity gain frequency of A_0 . Hence, its transfer function (or gain) in the frequency domain is A_0/s. Solving the circuit equations in the frequency domain, ignoring C_F for the moment, results in an expression for the gain shown in Equation 1.

$$\frac{V_{OUT}}{V_{IN}}(s) = \frac{-R_2/R_1}{\left[1 + \frac{s}{\left(\frac{A_0 R_1}{R_1 + R_2}\right)} + \frac{s^2}{\left(\frac{A_0}{C_{IN} R_2}\right)}\right]} \tag{1}$$

It can be inferred from the denominator of the transfer function that it has two poles, whose expressions can be obtained by solving for the roots of the denominator and are shown in Equation 2.

$$P_{1,2} = \frac{-1}{2C_{IN}}\left[\frac{1}{R_1} + \frac{1}{R_2} \pm \sqrt{\left(\frac{1}{R_1} + \frac{1}{R_2}\right)^2 - \frac{4\,A_0 C_{IN}}{R_2}}\right] \tag{2}$$

Equation 2 shows that as the values of R_1 and R_2 are increased, the magnitude of the poles, and hence the bandwidth of the amplifier, is reduced. This theory is verified by using different values of R_1 and R_2 in the circuit shown in Figure 45 and by comparing their frequency responses. In Figure 47 the frequency responses for three different values of R_1 and R_2 are shown. When both R_1 and R_2 are 1 kΩ, the response is flattest and widest; whereas, it narrows and peaks significantly when both their values are changed to 10 kΩ or 30 kΩ. So it is advisable to use lower values of R_1 and R_2 to obtain a wider and flatter response. Lower resistances also help in high sensitivity circuits since they add less noise.

Copyright © 2006–2011, Texas Instruments Incorporated

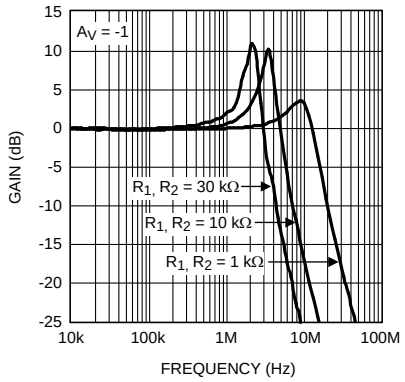


Figure 47. Gain Peaking Caused by Large R_1, R_2

A way of reducing the gain peaking is by adding a feedback capacitance C_F in parallel with R_2. This introduces another pole in the system and prevents the formation of pairs of complex conjugate poles which cause the gain to peak. Figure 48 shows the effect of C_F on the frequency response of the circuit. Adding a capacitance of 2 pF removes the peak, while a capacitance of 5 pF creates a much lower pole and reduces the bandwidth excessively.

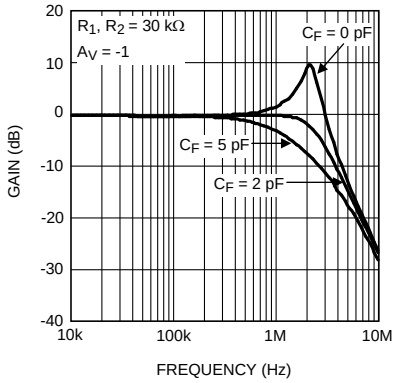


Figure 48. Gain Peaking Eliminated by C_F

AUDIO PREAMPLIFIER WITH BAND PASS FILTERING

With low input referred voltage noise, low supply voltage and current, and a low harmonic distortion, the LMV796 family is ideal for audio applications. Its wide unity gain bandwidth allows it to provide large gain for a wide range of frequencies and it can be used to design a preamplifier to drive a load of as low as 600Ω with less than 0.01% distortion. Two amplifier circuits are shown in Figure 49 and Figure 50. Figure 49 is an inverting amplifier, with a 10 kΩ feedback resistor, R_2, and a 1kΩ input resistor, R_1, and hence provides a gain of −10. Figure 50 is a non-inverting amplifier, using the same values of $R_1$and R_2, and provides a gain of 11. In either of these circuits, the coupling capacitor C_{C1} decides the lower frequency at which the circuit starts providing gain, while the feedback capacitor C_F decides the frequency at which the gain starts dropping off. Figure 51 shows the frequency response of the inverting amplifier with different values of C_F.

Copyright © 2006–2011, Texas Instruments Incorporated

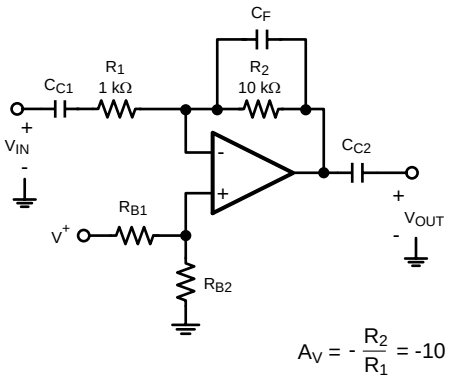


Figure 49. Inverting Audio Preamplifier

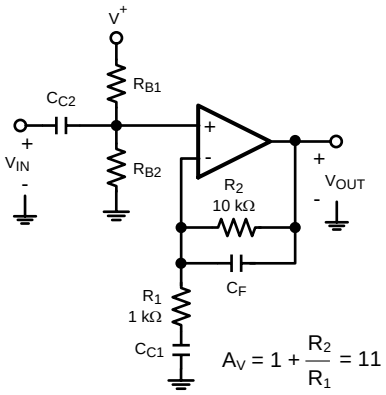


Figure 50. Non-inverting Audio Preamplifier

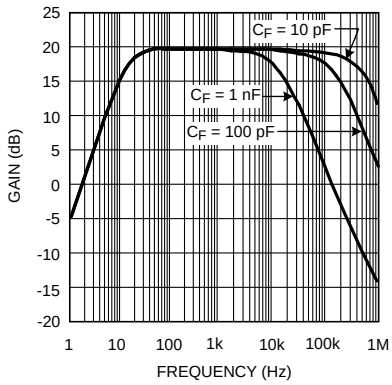


Figure 51. Frequency Response of the Inverting Audio Preamplifier

TRANSIMPEDANCE AMPLIFIER

CMOS input op amps are often used in transimpedance applications as they have an extremely high input impedance. A transimpedance amplifier converts a small input current into a voltage. This current is usually generated by a photodiode. The transimpedance gain, measured as the ratio of the output voltage to the input current, is expected to be large and wide-band. Since the circuit deals with currents in the range of a few nA, low noise performance is essential. The LMV796/LMV797 are CMOS input op amps providing wide bandwidth and low noise performance, and are hence ideal for transimpedance applications.

Copyright © 2006–2011, Texas Instruments Incorporated

Usually, a transimpedance amplifier is designed on the basis of the current source driving the input. A photodiode is a very common capacitive current source, which requires transimpedance gain for transforming its miniscule current into easily detectable voltages. The photodiode and the amplifier's gain are selected with respect to the speed and accuracy required of the circuit. A faster circuit would require a photodiode with lesser capacitance and a faster amplifier. A more sensitive circuit would require a sensitive photodiode and a high gain. A typical transimpedance amplifier is shown in Figure 52. The output voltage of the amplifier is given by the equation $V_{OUT} = -I_{IN}R_F$. Since the output swing of the amplifier is limited, R_F should be selected such that all possible values of I_{IN} can be detected.

The LMV796/LMV797 have a large gain-bandwidth product (17 MHz), which enables high gains at wide bandwidths. A rail-to-rail output swing at 5.5V supply allows detection and amplification of a wide range of input currents. A CMOS input stage with negligible input current noise and low input voltage noise allows the LMV796/LMV797 to provide high fidelity amplification for wide bandwidths. These properties make the LMV796/LMV797 ideal for systems requiring wide-band transimpedance amplification.

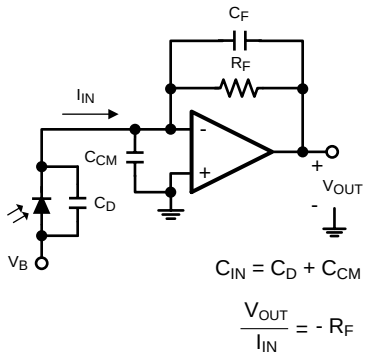


Figure 52. Photodiode Transimpedance Amplifier

As mentioned earlier, the following parameters are used to design a transimpedance amplifier: the amplifier gain-bandwidth product, A_0; the amplifier input capacitance, C_{CM}; the photodiode capacitance, C_D; the transimpedance gain required, R_F; and the amplifier output swing. Once a feasible R_F is selected using the amplifier output swing, these numbers can be used to design an amplifier with the desired transimpedance gain and a maximally flat frequency response.

An essential component for obtaining a maximally flat response is the feedback capacitor, C_F. The capacitance seen at the input of the amplifier, C_{IN}, combined with the feedback capacitor, R_F, generate a phase lag which causes gain-peaking and can destabilize the circuit. C_{IN} is usually just the sum of C_D and C_{CM}. The feedback capacitor C_F creates a pole, f_P in the noise gain of the circuit, which neutralizes the zero in the noise gain, f_Z, created by the combination of R_F and C_{IN}. If properly positioned, the noise gain pole created by C_F can ensure that the slope of the gain remains at 20 dB/decade till the unity gain frequency of the amplifier is reached, thus ensuring stability. As shown in Figure 53, f_P is positioned such that it coincides with the point where the noise gain intersects the op amp's open loop gain. In this case, f_P is also the overall −3 dB frequency of the transimpedance amplifier. The value of C_F needed to make it so is given by Equation 3. A larger value of C_F causes excessive reduction of bandwidth, while a smaller value fails to prevent gain peaking and instability.

$$C_F = \frac{1 + \sqrt{1 + 4\pi R_F C_{IN} A_0}}{2\pi R_F A_0} \quad (3)$$

Copyright © 2006–2011, Texas Instruments Incorporated

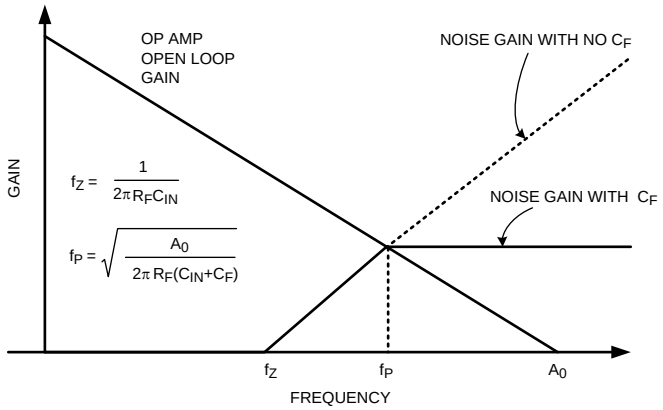


Figure 53. C_F Selection for Stability

Calculating C_F from Equation 3 can sometimes return unreasonably small values (<1 pF), especially for high speed applications. In these cases, it is often more practical to use the circuit shown in Figure 54 in order to allow more reasonable values. In this circuit, the capacitance C_F' is (1+ R_B/R_A) times the effective feedback capacitance, C_F. A larger capacitor can now be used in this circuit to obtain a smaller effective capacitance.

For example, if a C_F of 0.5 pF is needed, while only a 5 pF capacitor is available, R_B and R_A can be selected such that R_B/R_A = 9. This would convert a C_F' of 5 pF into a C_F of 0.5 pF. This relationship holds as long as R_A << R_F.




Figure 54. Obtaining Small C_F from Large C_F'

LMV796 AS A TRANSIMPEDANCE AMPLIFIER

The LMV796 was used in the designs for a number of amplifiers with varying transimpedance gains and source capacitances. The gains, bandwidths and feedback capacitances of the circuits created are summarized in Table 1. The frequency responses are presented in Figure 55 and Figure 56. The feedback capacitances are slightly different from the formula in Equation 3, since the parasitic capacitance of the board and the feedback resistor R_F had to be accounted for.

Table 1.

Transimpedance, A_{TI}	C_{IN}	C_F	−3 dB Frequency
470000	50 pF	1.5 pF	350 kHz
470000	100 pF	2.0 pF	250 kHz
470000	200 pF	3.0 pF	150 kHz
47000	50 pF	4.5 pF	1.5 MHz
47000	100 pF	6.0 pF	1 MHz
47000	200 pF	9.0 pF	700 kHz

Copyright © 2006–2011, Texas Instruments Incorporated

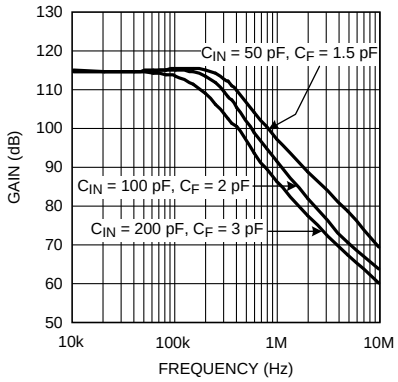


Figure 55. Frequency Response for A_{TI} = 470000

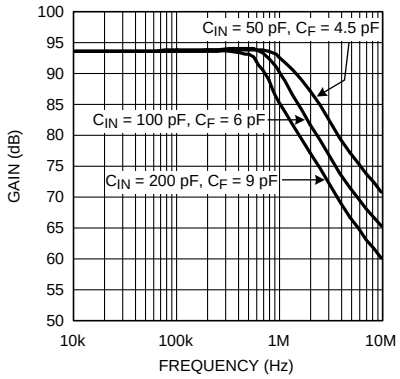



Figure 56. Frequency Response for A_{TI} = 47000

HIGH GAIN WIDEBAND TRANSIMPEDANCE AMPLIFIER USING THE LMV797

The LMV797 dual, low noise, wide bandwidth, CMOS input op amp IC can be used for compact, robust and integrated solutions for sensing and amplifying wide-band signals obtained from sensitive photodiodes. One of the two op amps available can be used to obtain transimpedance gain while the other can be used for amplifying the output voltage to further enhance the transimpedance gain. The wide bandwidth of the op amps (17 MHz) ensures that they are capable of providing high gain for a wide range of frequencies. The low input referred noise (5.8 nV/√Hz) allows the amplifier to deliver an output with a high SNR (signal to noise ratio). The small 8-pin VSSOP footprint saves space on printed circuit boards and allows ease of design in portable products.

The circuit shown in Figure 57, has the first op amp acting as a transimpedance amplifier with a gain of 47000, while the second stage provides a voltage gain of 10. This provides a total transimpedance gain of 470000 with a −3 dB bandwidth of about 1.5 MHz, for a total input capacitance of 50 pF. The frequency response for the circuit is shown in Figure 58

Copyright © 2006–2011, Texas Instruments Incorporated

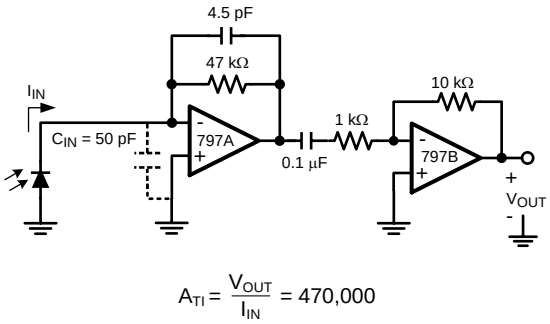

$$A_{TI} = \frac{V_{OUT}}{I_{IN}} = 470{,}000$$

Figure 57. 1.5 MHz Transimpedance Amplifier with A_{TI} = 470000


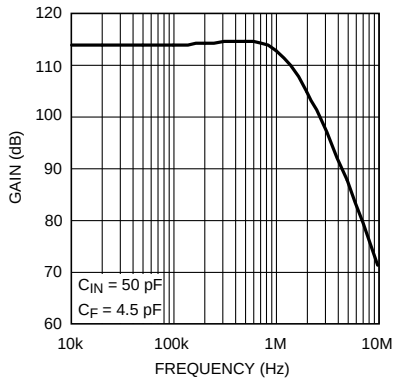


Figure 58. 1.5 MHz Transimpedance Amplifier Frequency Response

SENSOR INTERFACES

The low input bias current and low input referred noise of the LMV796 and LMV797 make them ideal for sensor interfaces. These circuits are required to sense voltages of the order of a few µV and currents amounting to less than a nA hence, the op amp needs to have low voltage noise and low input bias current. Typical applications include infra-red (IR) thermometry, thermocouple amplifiers and pH electrode buffers. Figure 59 is an example of a typical circuit used for measuring IR radiation intensity, often used for estimating the temperature of an object from a distance. The IR sensor generates a voltage proportional to I, which is the intensity of the IR radiation falling on it. As shown in Figure 59, K is the constant of proportionality relating the voltage across the IR sensor (V_{IN}) to the radiation intensity, I. The resistances R_A and R_B are selected to provide a high gain to amplify this voltage, while C_F is added to filter out the high frequency noise.

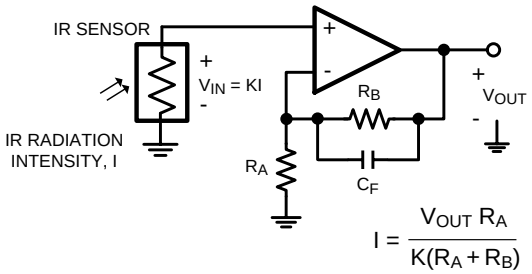

$$I = \frac{V_{OUT}\, R_A}{K(R_A + R_B)}$$

Figure 59. IR Radiation Sensor

Copyright © 2006–2011, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
LMV796MF	ACTIVE	SOT-23	DBV	5	1000	TBD	Call TI	Call TI	-40 to 125	AT3A	Samples
LMV796MF/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AT3A	Samples
LMV796MFX	ACTIVE	SOT-23	DBV	5	3000	TBD	Call TI	Call TI	-40 to 125	AT3A	Samples
LMV796MFX/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AT3A	Samples
LMV796QMF/NOPB	ACTIVE	SOT-23	DBV	5	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AD7A	Samples
LMV796QMFX/NOPB	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AD7A	Samples
LMV797MM	ACTIVE	VSSOP	DGK	8	1000	TBD	Call TI	Call TI	-40 to 125	AU3A	Samples
LMV797MM/NOPB	ACTIVE	VSSOP	DGK	8	1000	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AU3A	Samples
LMV797MMX	ACTIVE	VSSOP	DGK	8	3500	TBD	Call TI	Call TI	-40 to 125	AU3A	Samples
LMV797MMX/NOPB	ACTIVE	VSSOP	DGK	8	3500	Green (RoHS & no Sb/Br)	CU SN	Level-1-260C-UNLIM	-40 to 125	AU3A	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LMV796, LMV796-Q1 :


- Catalog: LMV796
- Automotive: LMV796-Q1

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

TAPE AND REEL INFORMATION

REEL DIMENSIONS

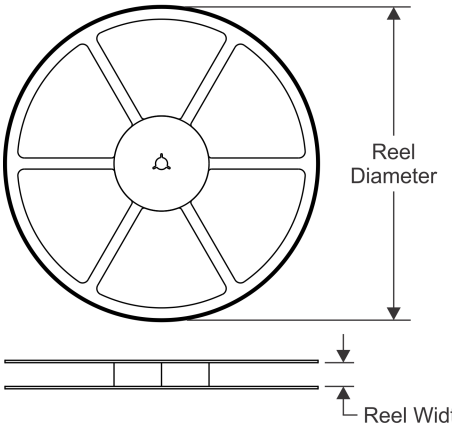


TAPE DIMENSIONS

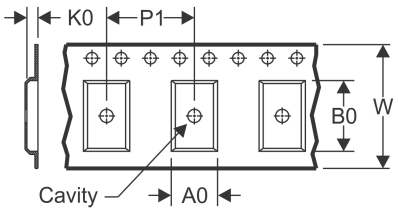

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

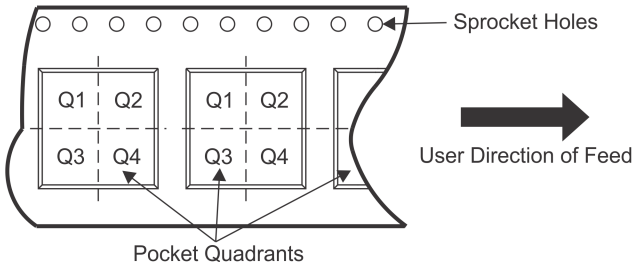

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LMV796MF	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV796MF/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV796MFX	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV796MFX/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV796QMF/NOPB	SOT-23	DBV	5	1000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV796QMFX/NOPB	SOT-23	DBV	5	3000	178.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
LMV797MM	VSSOP	DGK	8	1000	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMV797MM/NOPB	VSSOP	DGK	8	1000	178.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMV797MMX	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
LMV797MMX/NOPB	VSSOP	DGK	8	3500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

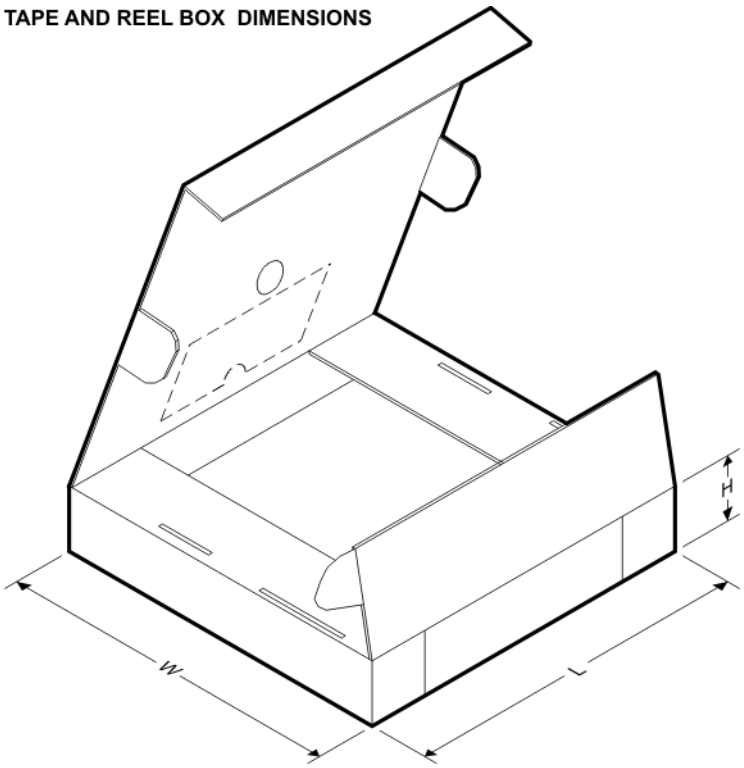

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LMV796MF	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV796MF/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV796MFX	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV796MFX/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV796QMF/NOPB	SOT-23	DBV	5	1000	210.0	185.0	35.0
LMV796QMFX/NOPB	SOT-23	DBV	5	3000	210.0	185.0	35.0
LMV797MM	VSSOP	DGK	8	1000	210.0	185.0	35.0
LMV797MM/NOPB	VSSOP	DGK	8	1000	210.0	185.0	35.0
LMV797MMX	VSSOP	DGK	8	3500	349.0	337.0	45.0
LMV797MMX/NOPB	VSSOP	DGK	8	3500	349.0	337.0	45.0


DBV (R–PDSO–G5) PLASTIC SMALL–OUTLINE PACKAGE

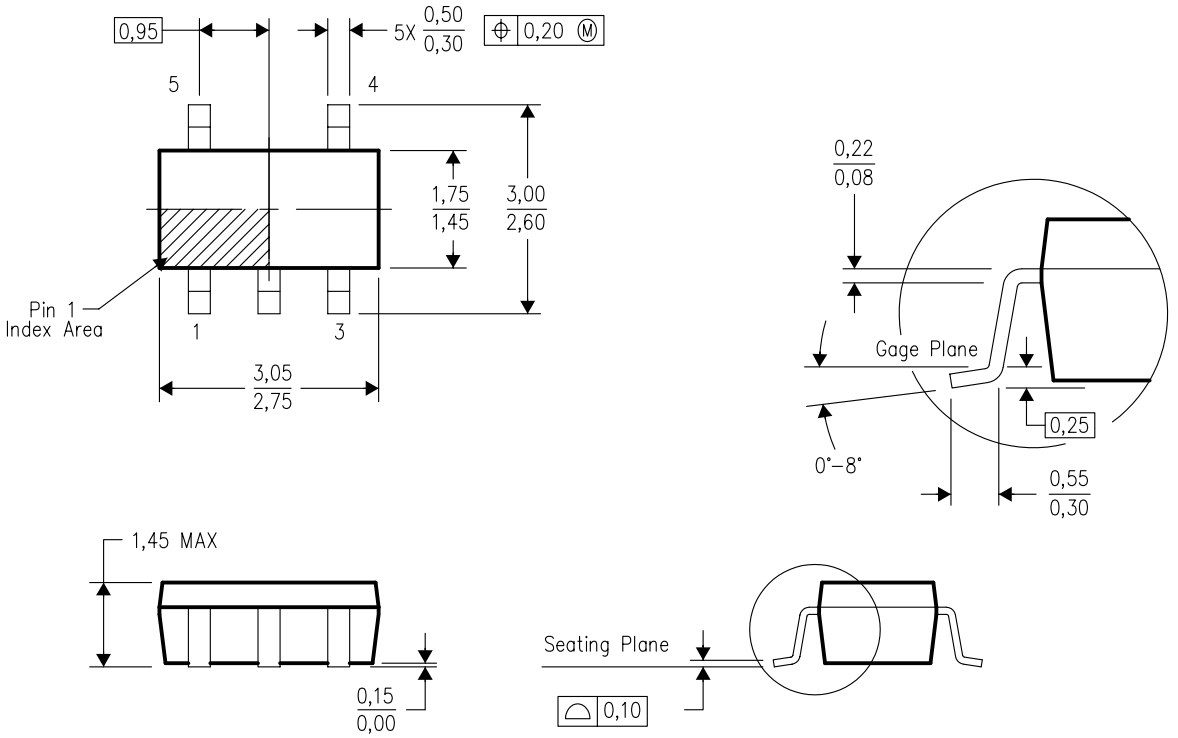

4073253–4/K 03/2006


NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
D. Falls within JEDEC MO–178 Variation AA.

DBV (R–PDSO–G5) PLASTIC SMALL OUTLINE

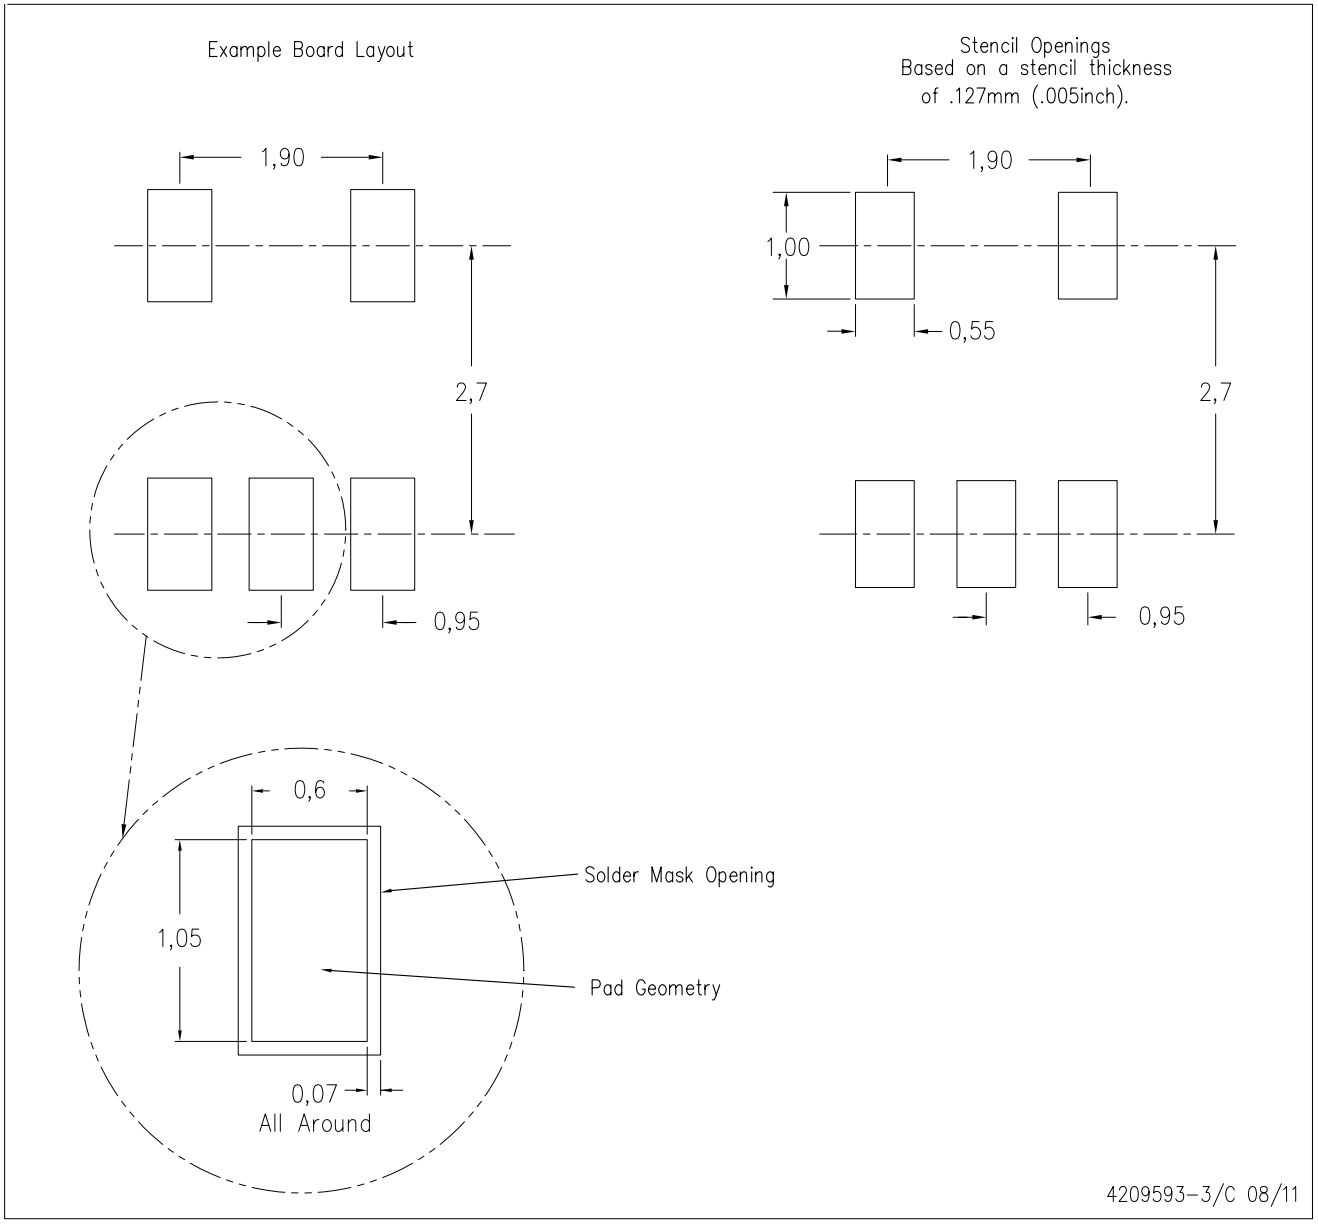

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
D. Publication IPC–7351 is recommended for alternate designs.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC–7525 for other stencil recommendations.

DGK (S–PDSO–G8) PLASTIC SMALL–OUTLINE PACKAGE

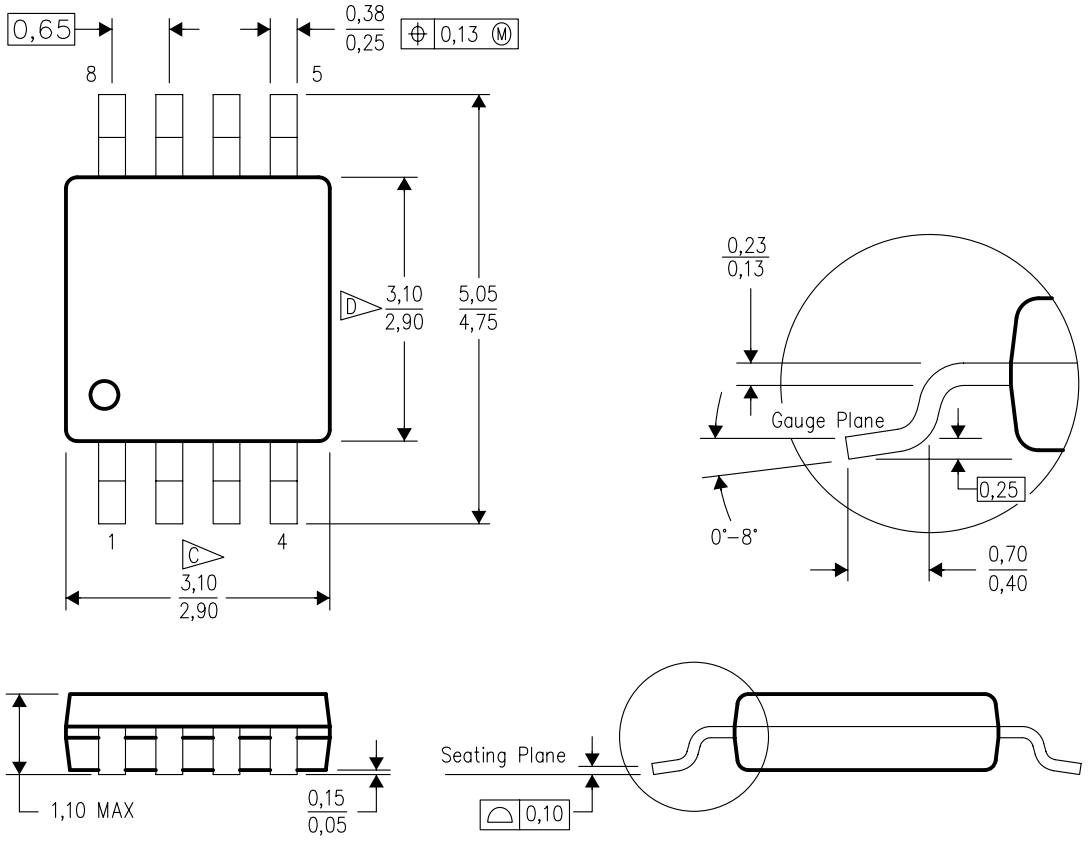

4073329/E 05/06

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
E. Falls within JEDEC MO–187 variation AA, except interlead flash.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated