
Hammond Mfg. Co. Ltd., Electronics Division

www.hammfg.com

1760J


TUBE GUITAR AMPLIFIER - OUTPUT TRANSFORMER

- Designed for drop in replacement of original units.
- Constructed to look similar to original factory units (where possible).
- Material used & design specifications were kept as close as possible to the original part to preserve the stock "tone".
- Open style with minimum 9" long primary and secondary leads
- Frequency response 70Hz - 15KHz (0/-1.5dB reference @ 1KHz)
- Distortion is less than 1% @ 70Hz

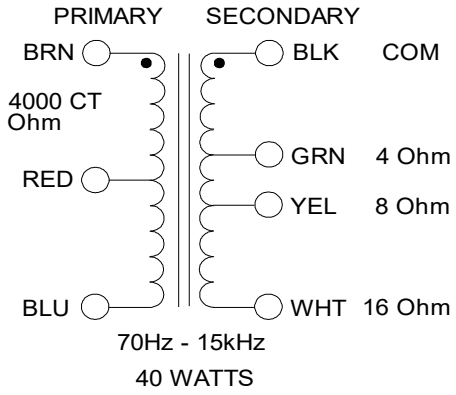

ELECTRICAL SPECIFICATIONS	
Characteristics	**Typical**
Input Impedance	4000 Ohms
Output Impedance	4, 8 & 16 Ohms
Output Power	40W

DCR		
Primary Brown-Blue		185.0 Ohms
Secondary Black-Green		0.356 Ohm
Secondary Black-Yellow		0.502 Ohm
Secondary Black-White		0.910 Ohm
Inductance	**Impedance**	@ 1.0 kHz, 1.0 V OC
Primary Brown-Blue		19.5H 124KOhm
Leakage Inductance		@ 1.0 kHz, 1.0 V SC
Brown-Blue		35.93mH
Dielectric Strength		1500VRMS
Temperature Range		-40 to 105 degC

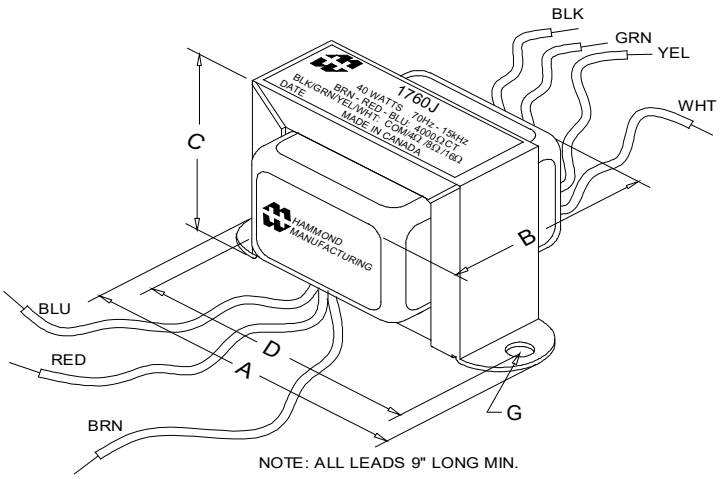

Dimensions			
A	4.000" ±0.063	D	3.560" ±0.063
B	2.80" REF	G	0.187" ±0.015
C	2.63" MAX		

TEST CONDITIONS

Measurement instruments:


D scope series iii audio analyzer — Keithley 2010 DVM

Wayne Kerr 3255B with a 3265B — Hp4192a impedance analyzer

* All graphs input level 27dBu @1.0KHz reference.


**The results are typical and are subject to normal manufacturing and electrical tolerances.

TYPICAL TEST CIRCUIT

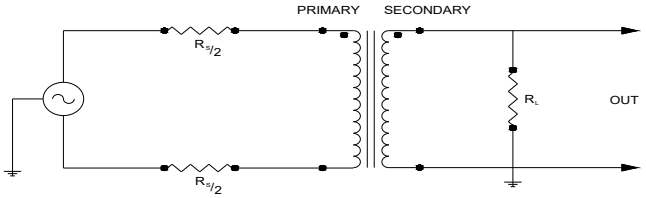


Release 2: 03.03.2021


1760J Frequency Response RS = 4K Ohms

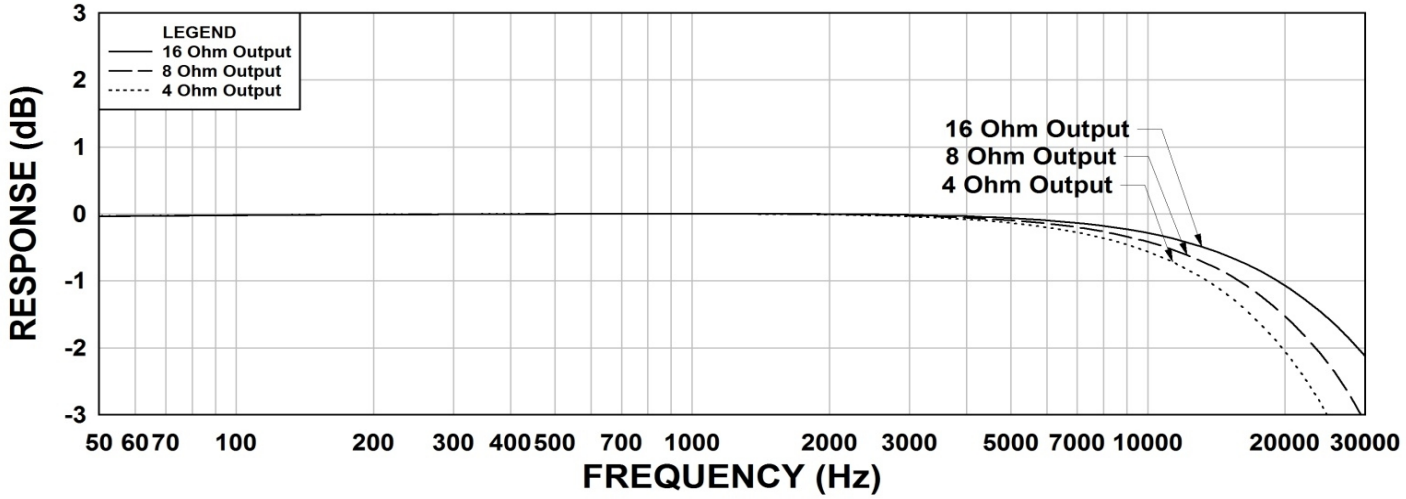

1760J Phase Shift RS = 4K Ohms

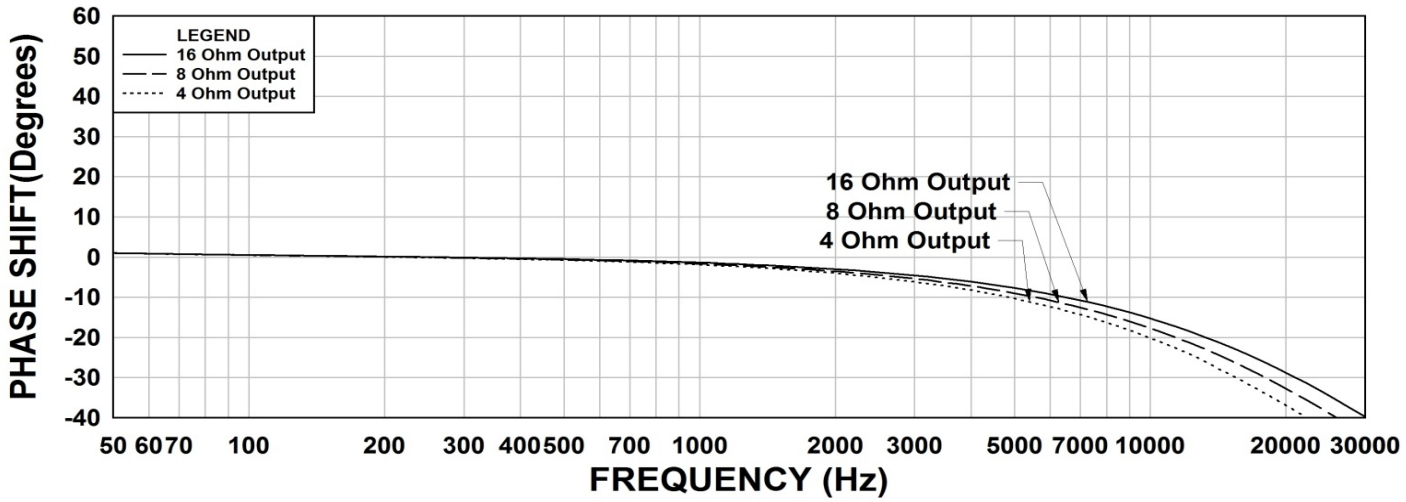

1760J THD+N RS = 4K Ohms

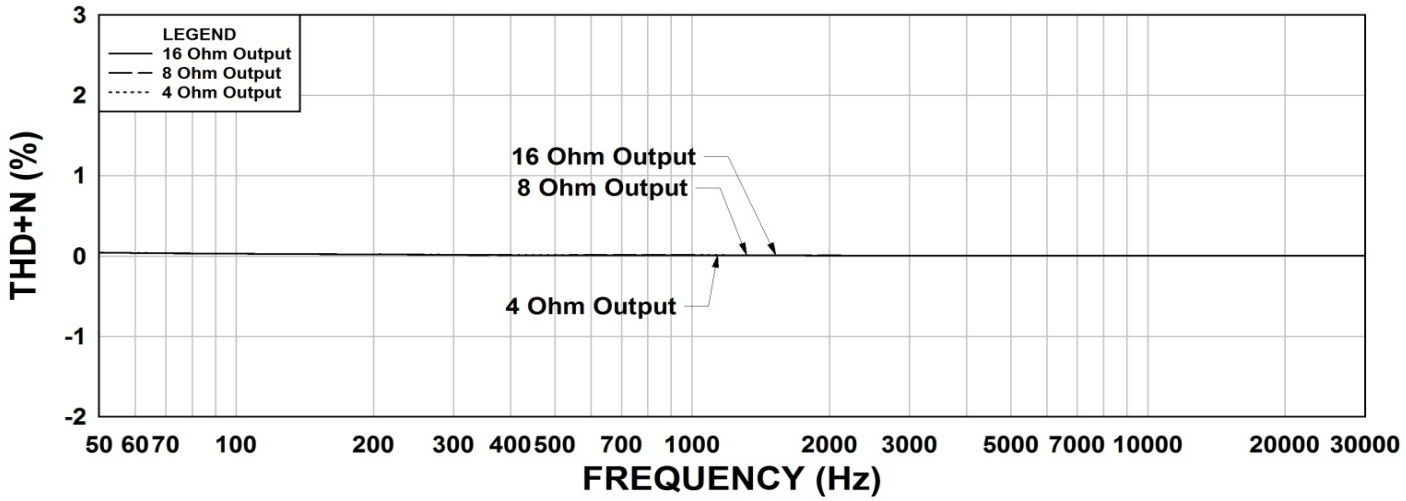

This drawing and the information in it is the property of Hammond Manufacturing. It may not be reproduced, transmitted or used in any manner whatsoever without the written permission of Hammond Manufacturing. Data subject to change without notice.