2JW0410
(DATASHEET)

Type	Tetra antenna
Frequencies	TETRA (380 - 500 MHz)
Mounting	Telematic Mount
Part No.	**2JW0410-Cxx**



P. Tipul

1. PRODUCT SELECTOR

2JW0410-C202N	with BNC male connector
2JW0410-C109N	with SMA male R/A connector

2. SPECIFICATION

2.1. Electrical Specifications

Frequencies	TETRA (380 - 500 MHz)*
Impedance	50 Ohms
Polarization	VERTICAL
Gain	2 dBi Max.
VSWR	<2:1
Bandwidth (-10dB)	40MHz
Power handling	35W
Operating temperature	-40°C to +85°C

*Center frequency can be tuned in from 380 – 500 Mhz

2.2. Mechanical Specifications and Dimensions

2.2.1. 2JW0410-C202N

Material:	TPE
Max. dimensions:	14,5mm x 146mm (D x L)
Weight:	14 g
Colour:	Black (for different colours please ask our sales team)

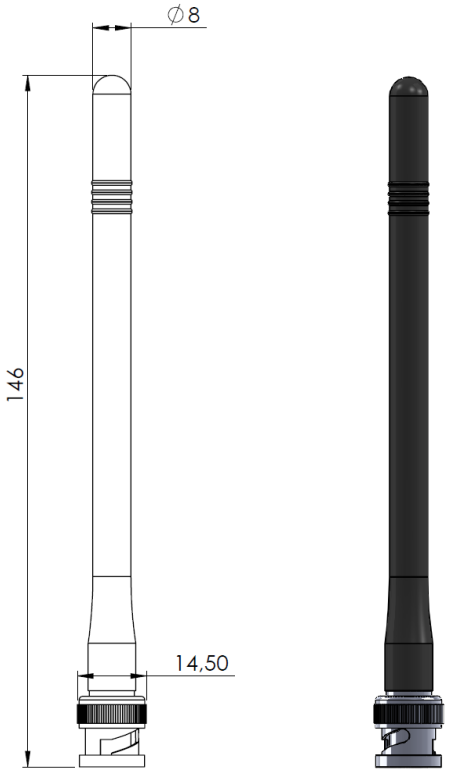

2.2.2. 2JW0410-C109N

Material:	TPE
Max. dimensions:	10mm x 138mm (D x L)
Weight:	13 g
Colour:	Black (for different colours please ask our sales team)

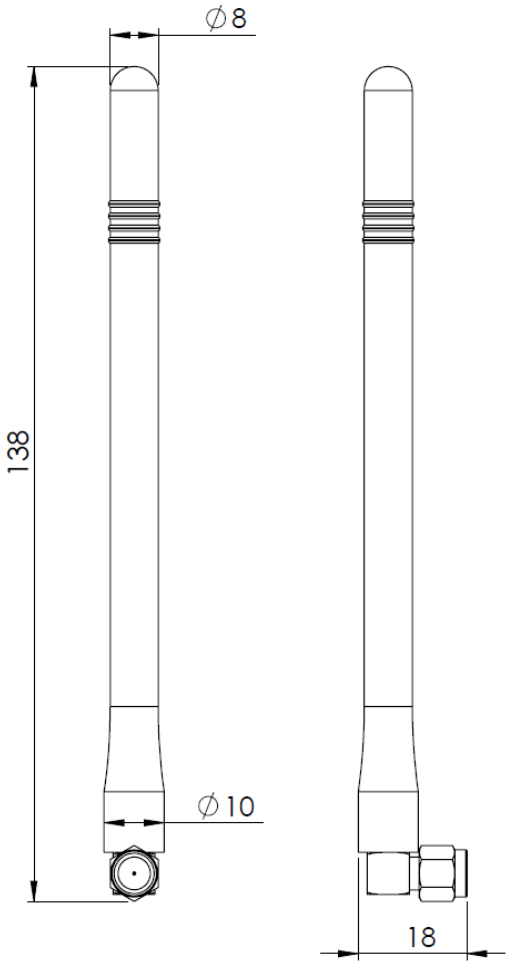

1. MEASUREMENT

Log Mag (Tetra)

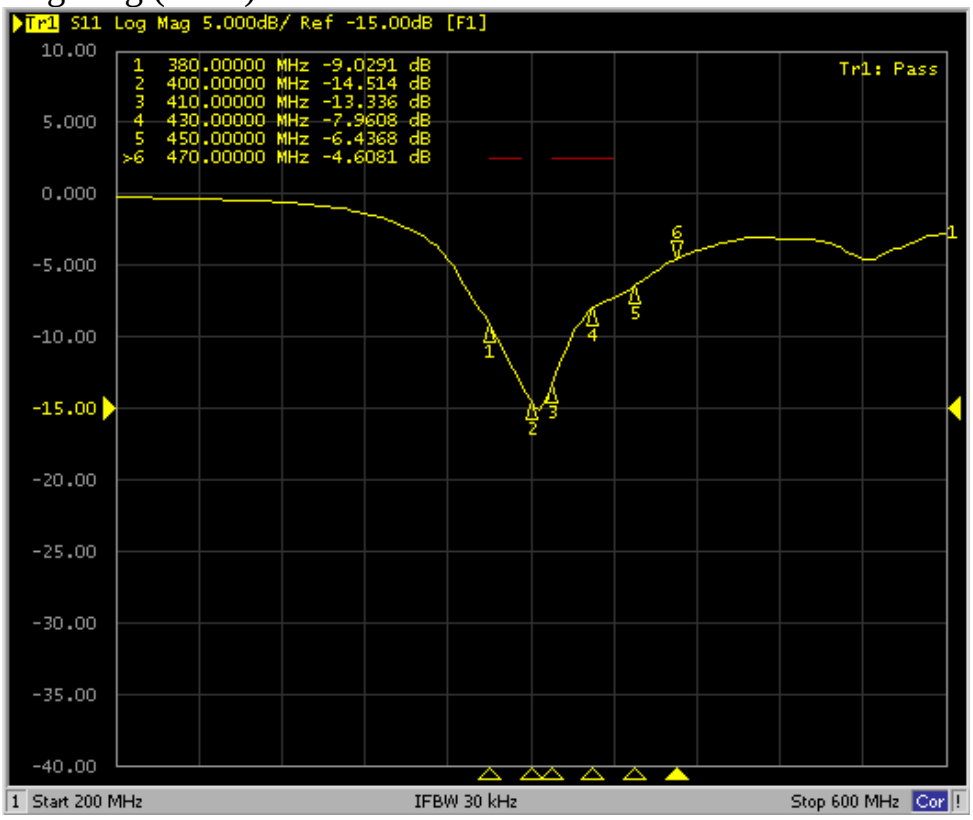

2. IMAGES



