antenna conceptor

Product Datasheet

2J4A41PCFa

CELLULAR/LTE MIMO and GNSS Adhesive Mount



Key Features

Cable 1 and 2: CELLULAR / LTE
- 698-960 MHz
- 1710-2170 MHz
- 2500-2700 MHz

Cable 3: GPS/GLONASS/BeiDou/QZSS/Galileo
- 1575-1606 MHz

Adhesive Mount
High Performance
Ground Plane Independent
Customizable Cable and Connector
Dimensions: 61.8 x 155.6 x 17.0 mm
Certificates: IP67, IP69

1. Antenna Description

2J4A41PCFa "The Condor Series"

A stellar performance in a compact system

With a size reduction of up to 50% in comparison with other antennas in the market and the highest performance for a 3-in-1 antenna solution, single package the Condor 2J4A41PCFa antenna is the most competitive solution on the market. Users can opt for other configurations in the same enclosure such as 2-in1, 4-in-1 or 5-in-1 antenna as per their needs, please check our website or contact our sales team for questions and details.

If you are looking for an antenna that is sleek in design and makes no compromises on efficiency and performance, then 2J4A41PCFa is the best option. Engineered according to the latest technological advancements, this antenna provides LTE-MIMO (2x) and GNSS (1x) applications delivering very high-efficiency uninterrupted data transfers at maximum speed, achieved by the low Envelope Correlation Coefficient at the LTE-MIMO antennas.

Worldwide solution

The key feature here is that 2J4A41PCFa is compatible with all LTE, 4G, 3G or 2G network ecosystems. With countless applications and customer-centric benefits, high-precision, low noise and low power consumption GNSS active ceramic antenna stands out among its competition, compatible for GPS, Glonass, BeiDou, Galileo and QZSS geolocation technologies.

Typical applications

- Infotainment systems
- HD video transmission
- Dash cameras
- Connected cars
- Self-driving cars
- Fleet management
- Gateways
- Routers
- Public transportation
- Logistics
- And others

Compatibility Standards

LTE Cables
- CAT 1 2 3 4 5 6 7 8 9 10 11 12
- NB-IoT, LTE-NB1, CAT-M1, CAT-M2
- WCDMA, UMTS, HSPA, EDGE GRPS, GSM, CDMA

GPS/GLO/BEI Cable
- GPS, GLONASS, BeiDou
- Galileo, QZSS, L1, E1, B1

Installation and Durability

The 2J4A41PCFa can be easily installed or hidden in any part of your environment and application; on the top or bottom surfaces including windshields, dash, plastic, etc., as it comes equipped with a separate double adhesive pad that secures it safely. This product includes a low loss double shielded cable with fully customized length and connector that provides maximum antenna performance and reliability, avoiding drop connections, higher speed data, higher gain, etc. 3-in-1 feature allows for a quick handling in places where other solutions fail to implement and eliminates the need for the extensive labor involved in the installation of the product, saving time and resources.

Not only does this technology assure smooth performance, but it also comes bearing safety guarantee. With IP67 and IP69K ingress rating, our product provides maximum protection against dust and water and allows high pressure and steam cleaning. Passing drop test and vibration provides extra robustness ensuring longevity of the product, making it a cost-effective solution. Certificates for independent lab test are available under NDA.

The UV coating allows maximum protection against extensive outdoor use in extreme environments and temperatures.

2. Antenna and electrical specifications

Cable 1

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-13.7	~-19.8	~-10.1
VSWR	~1.7:1	~1.3:1	~1.9:1
Efficiency (%)	~52.9	~63.2	~43.7
Peak Gain (dBi)	~2.2	~3.6	~2.9
Average Gain (dB)	~-2.9	~-2.0	~-3.6
Impendance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	LMR195 (Other Cables Available)		

Cable 2

Parameters	CELLULAR / LTE Antenna		
Standards	2G,3G and 4G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	~-10.1	~-14.8	~-10.0
VSWR	~2.1:1	~1.5:1	~2.0:1
Efficiency (%)	~45.3	~58.9	~41.2
Peak Gain (dBi)	~1.1	~4.4	~2.2
Average Gain (dB)	~-3.5	~-2.3	~-3.9
Impendance (Ohm)	50		
Polarisation	Linear		
Radiation Pattern	Omni-Directional		
Max. Input Power (W)	25		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	LMR195 (Other Cables Available)		

Antenna Measurement Conditions:

Mounted on Plastic Plate of 30 x 30 cm

200 cm of Cable LMR195

Measured in Certified CTIA 3D Anechoic Chamber

Cable 3

Parameters	GPS/GLONASS/BeiDou Antenna		
Standards	BeiDou	GPS/QZSS/Galileo	GLONASS
Band (MHz)	1561	1575	1602
Frequency(MHz)	1561.098	1575.42	1598-1610
Patch Size (mm)	25 x 25 x 4		
Return Loss (dB)	<=-15.0 dB		
VSWR	<=1.4:1 dB		
Impedance	50		
Radiation Pattern	Hemispherical		
Polarization	RHCP		
Saw Filter	Pre-filter		
Active Gain (dB)	28 @ 2.7 V		
Noise Figure (dB)	1.5 Typ		
Voltage (V)	1.5 – 3.6		
Current Consumption (mA)	9 Typ		
Power Consumption (mW)	24.3 Typ		
ESD Protection (kV)	2kV		
Connector Type	SMA-Male Standard (Other Connectors Available)		
Cable Length	300 cm Standard (Any Cable Length Available)		
Cable Type	LMR100 Standard (Other Cables Available)		

3. Mechanical and environmental specifications

Specifications	2J4A41PCFa
Mounting Type	Adhesive Mount
Dimensions (mm)	61.8 x 155.6 x 17.0
Radome Type	ABS UV Stable
Radome color	Black
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69

4. Antenna parameters

Cable 1: CELLULAR/LTE

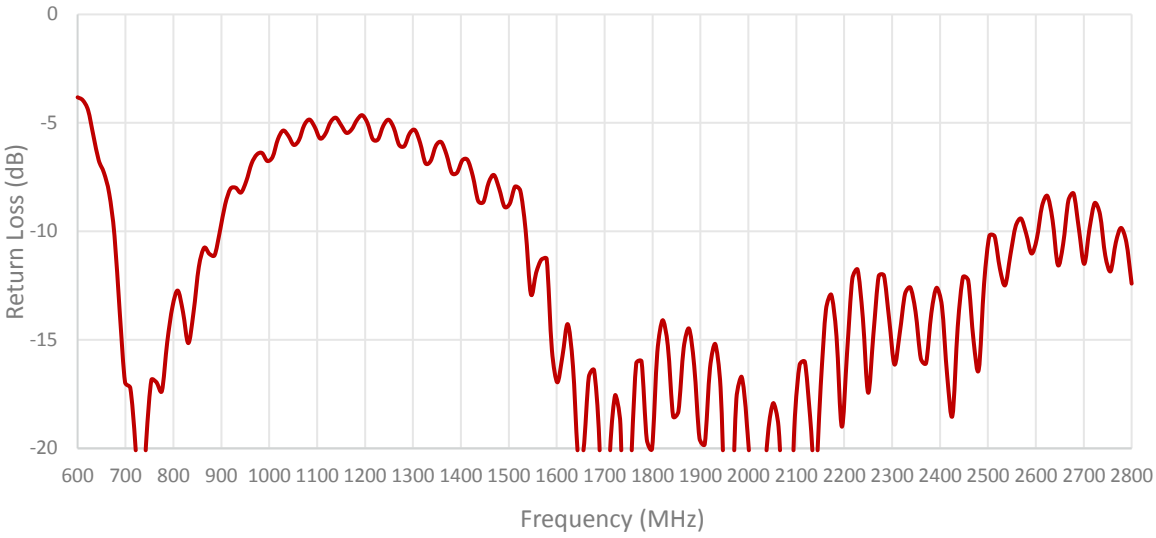

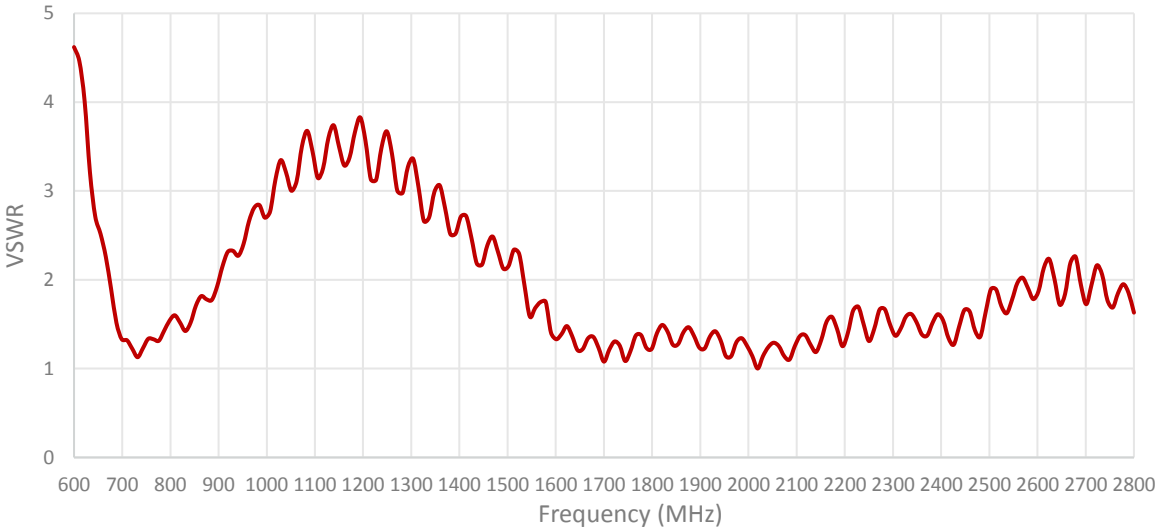

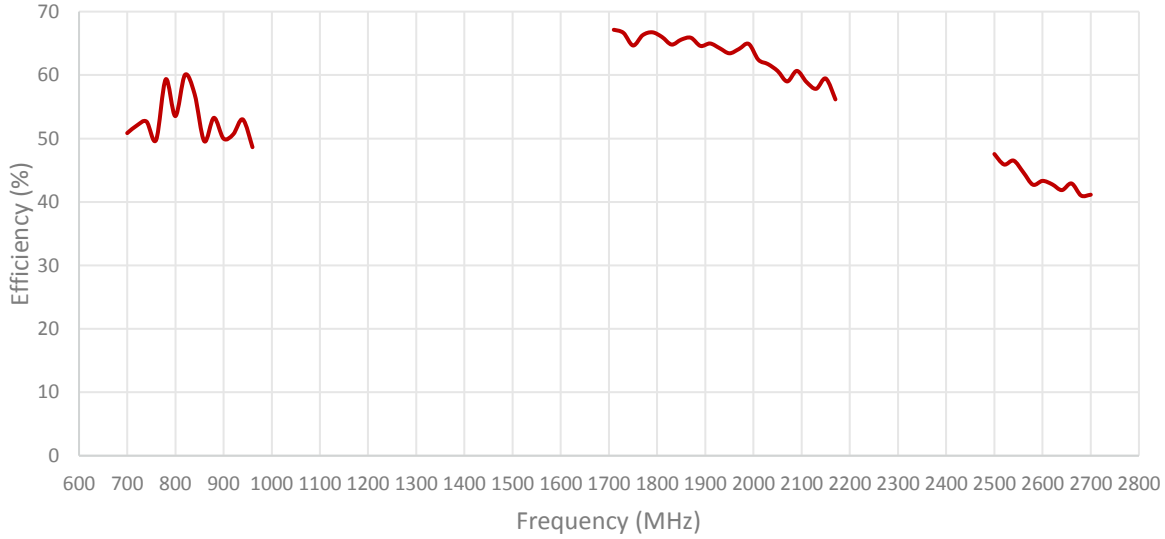
Efficiency (%)
70
60
50
40
30
20
10
0
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

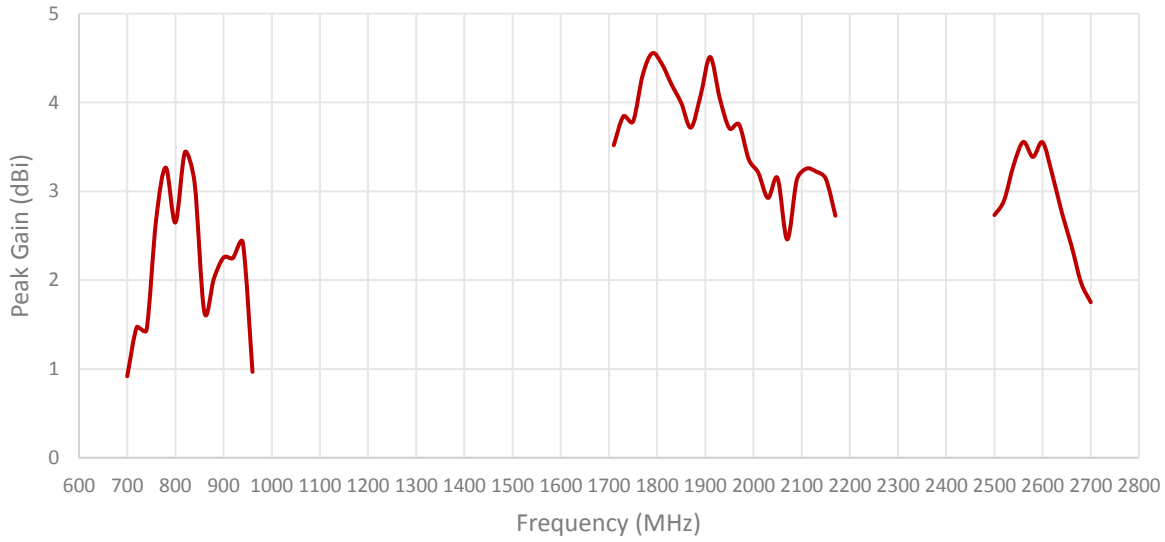
Peak Gain (dBi)
5
4
3
2
1
0
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

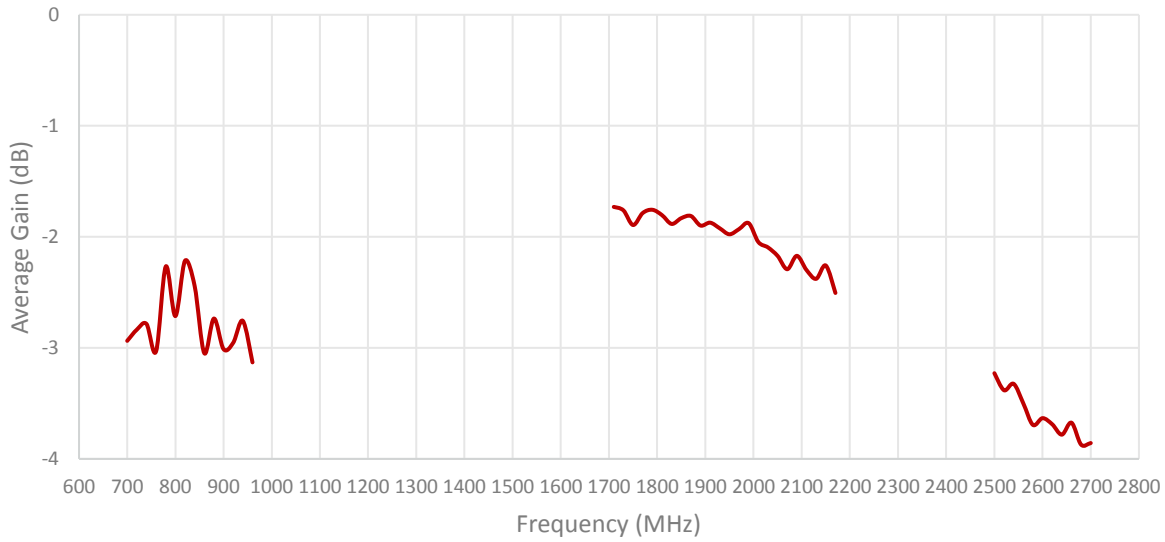
Average Gain (dB)
0
-1
-2
-3
-4
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

Cable 2: CELLULAR/LTE

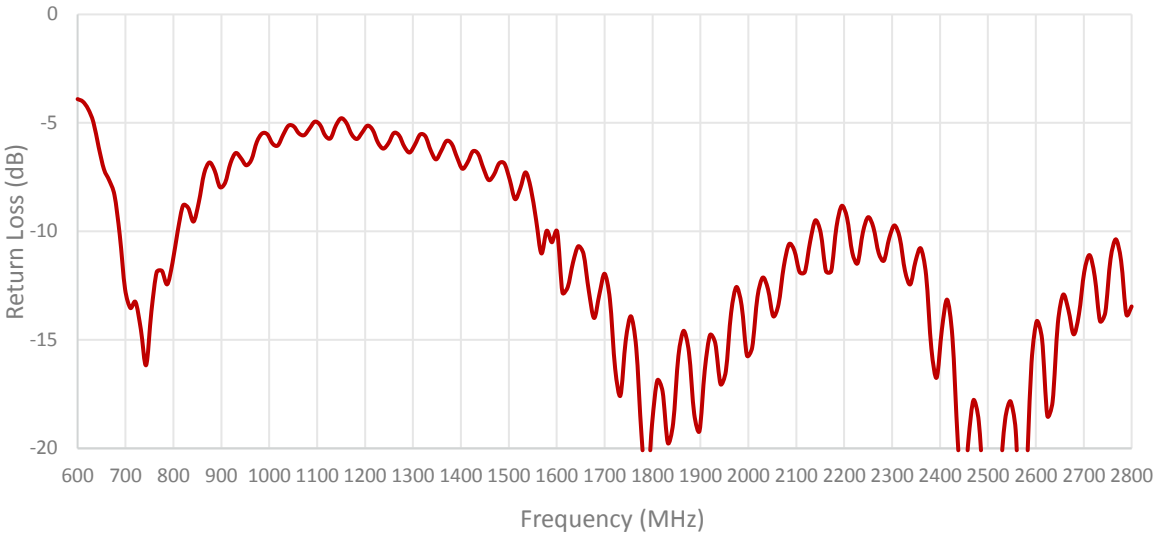

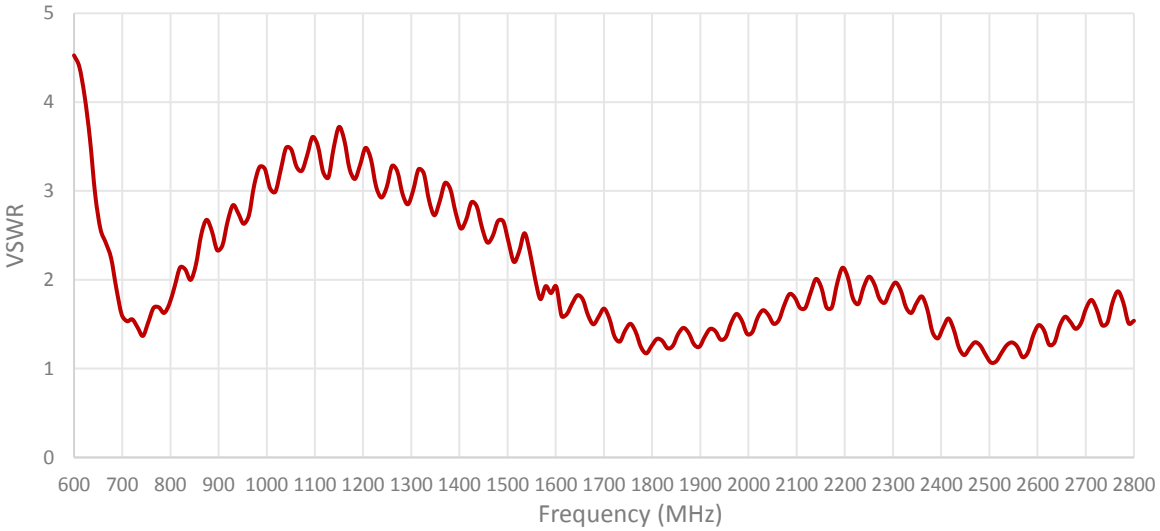

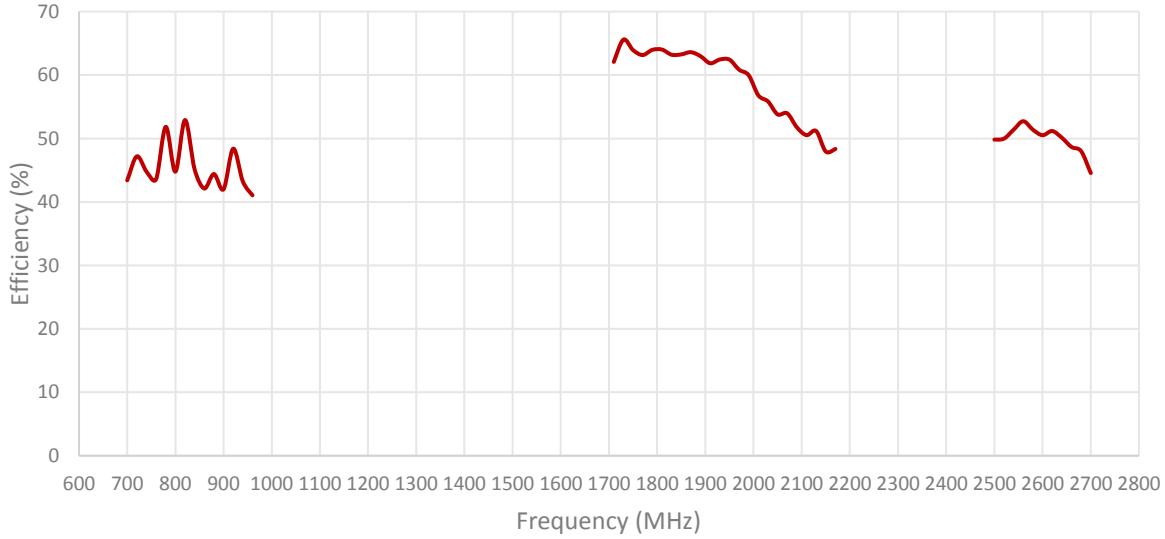
Efficiency (%)
70
60
50
40
30
20
10
0
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

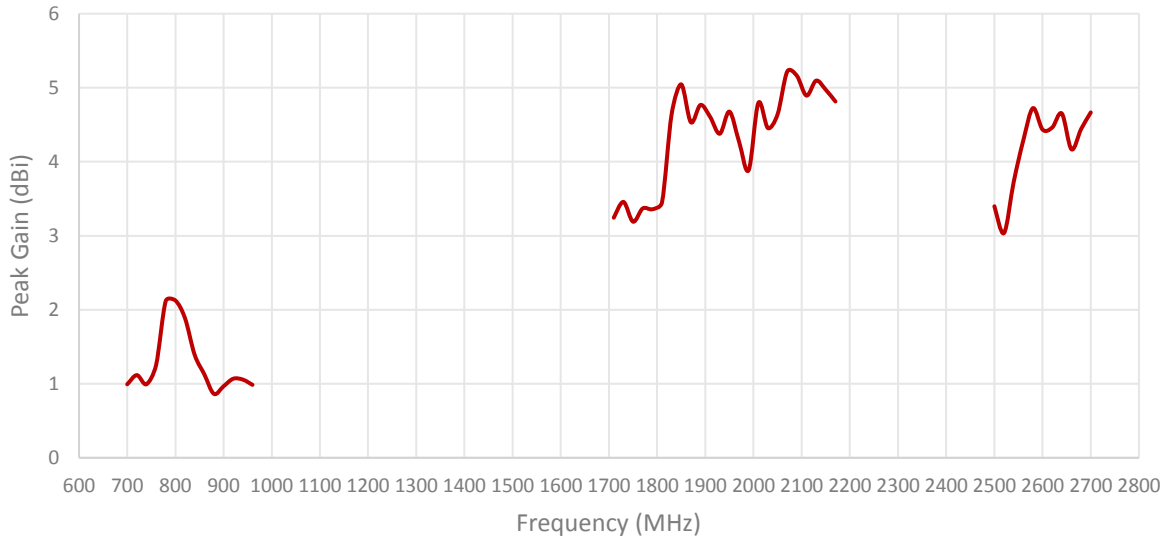
Peak Gain (dBi)
6
5
4
3
2
1
0
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

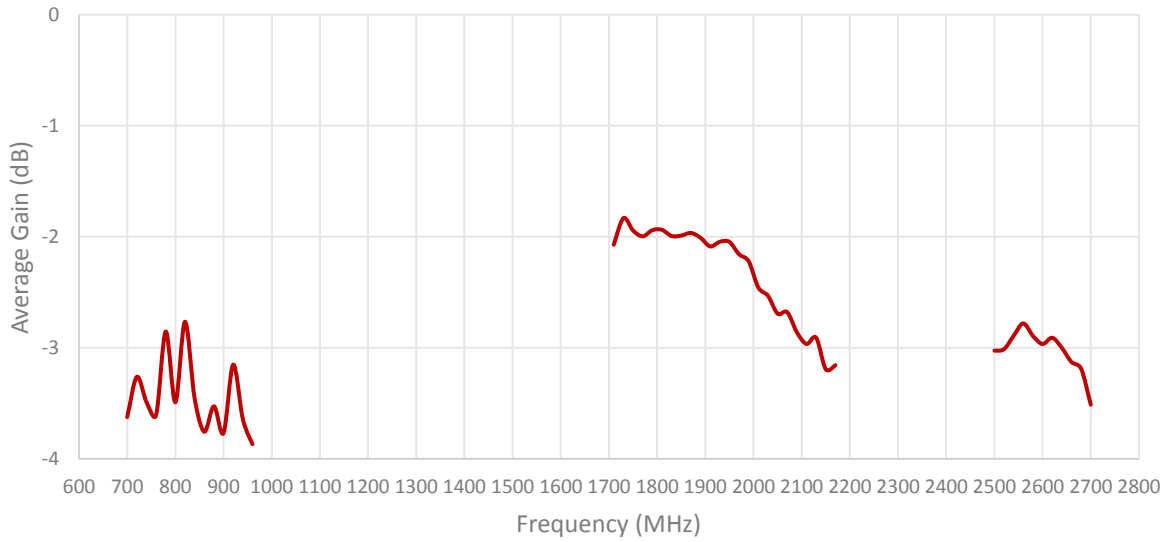
Average Gain (dB)
0
-1
-2
-3
-4
600 700 800 900 1000 1100 1200 1300 1400 1500 1600 1700 1800 1900 2000 2100 2200 2300 2400 2500 2600 2700 2800
Frequency (MHz)

ISOLATION FOR CABLES 1 AND 2

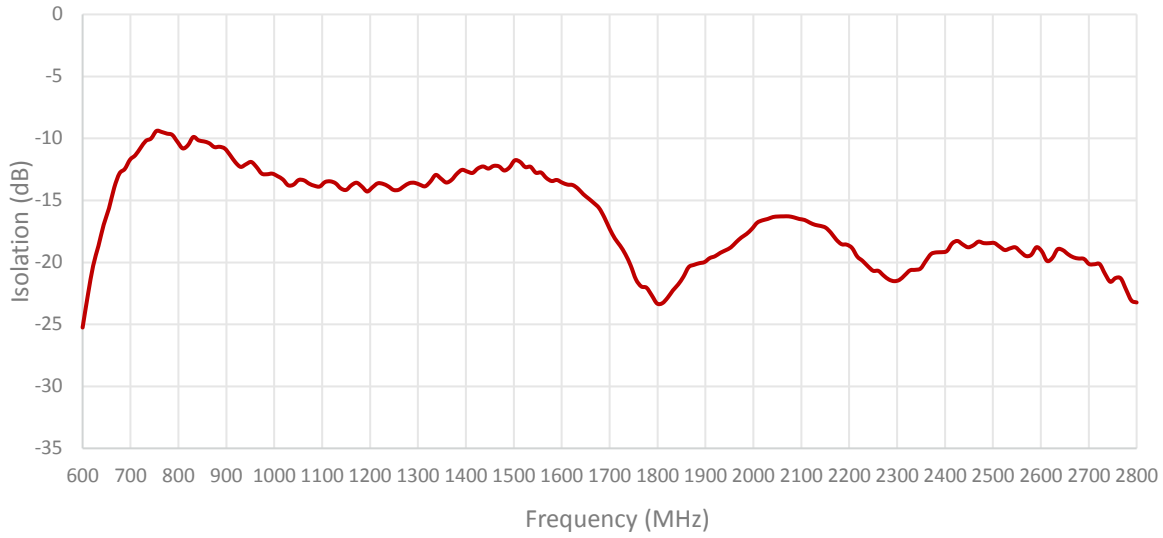

ENVELOPE CORRELATION COEFICIENT FOR CABLES 1 AND 2

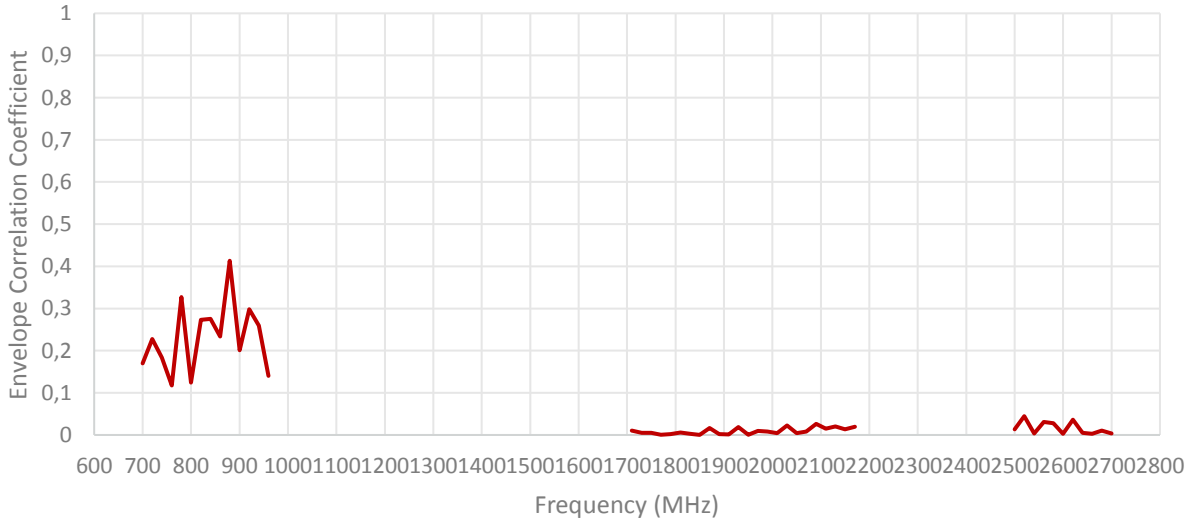

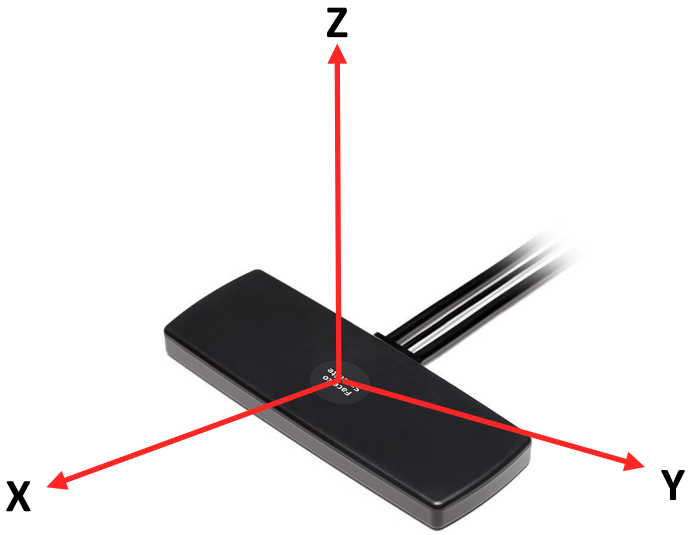

Radiation pattern reference

Cable 1: CELLULAR/LTE

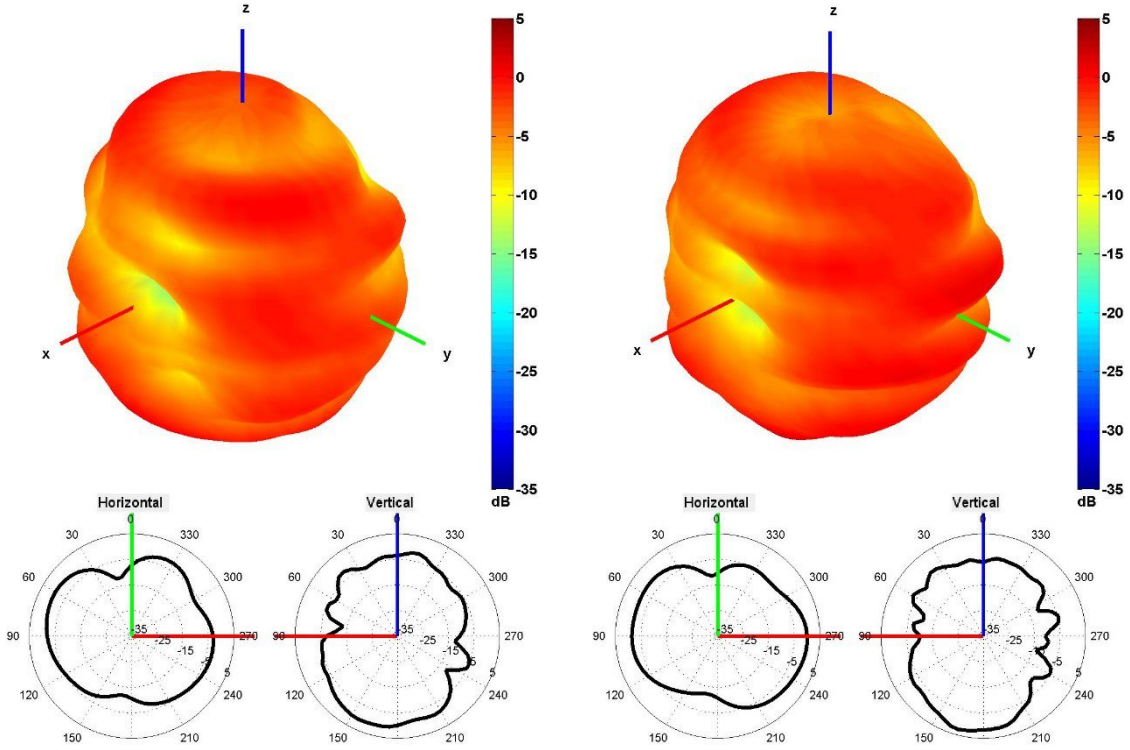

750 and 850 MHz Radiation pattern

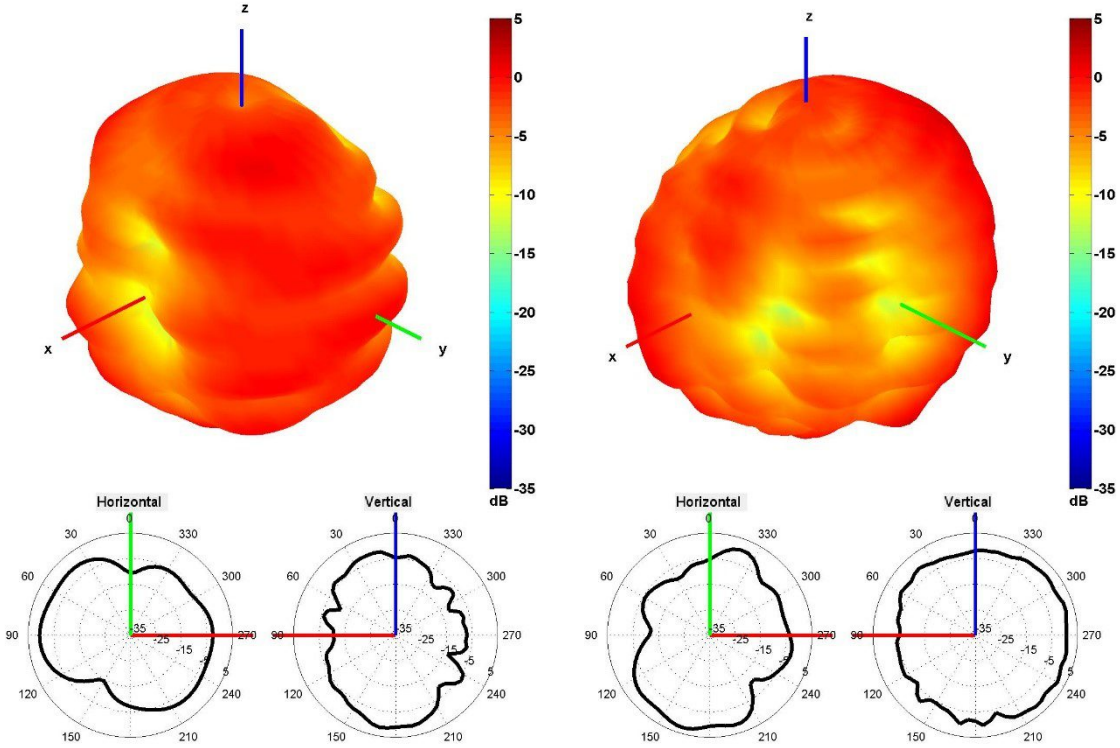

940 and 1750 MHz Radiation pattern

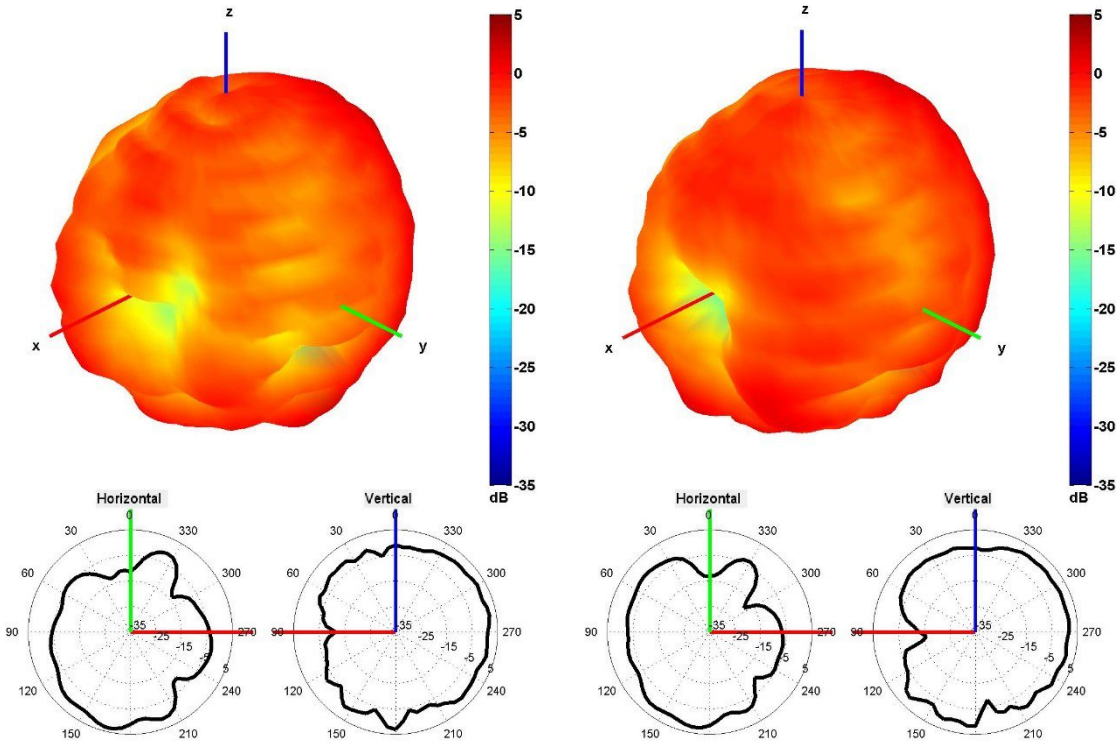

1850 and 1950 MHz Radiation pattern

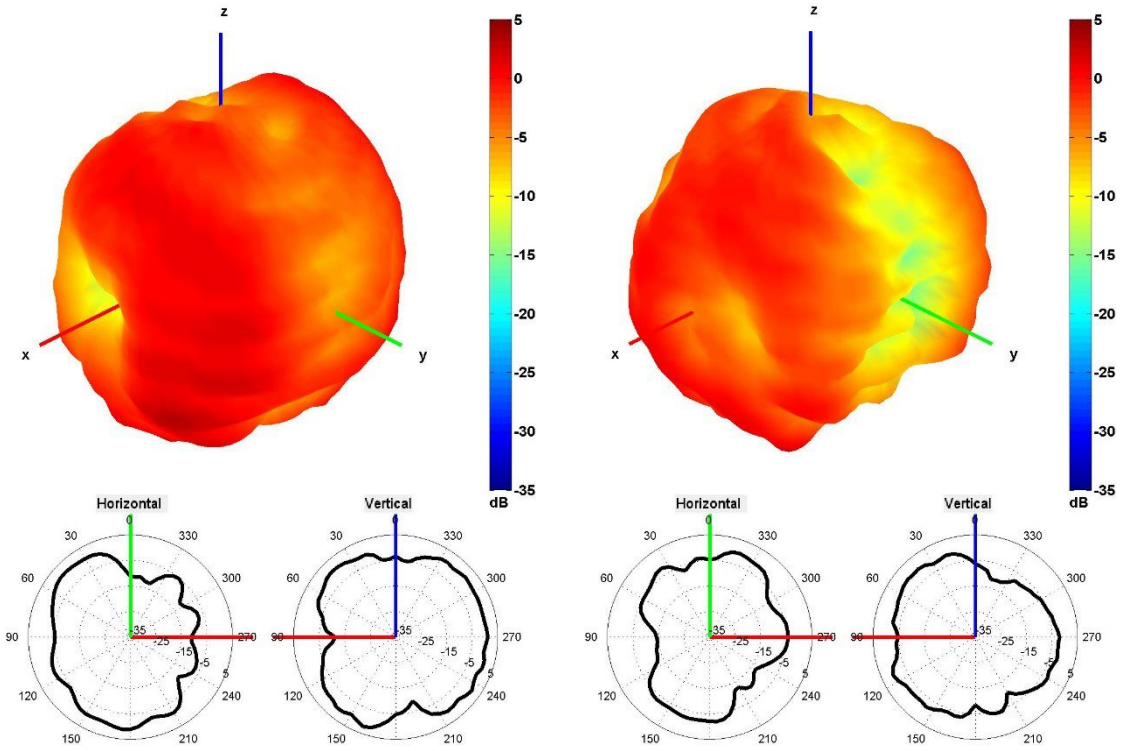

2100 and 2600 MHz Radiation pattern

Cable 2: CELLULAR/LTE

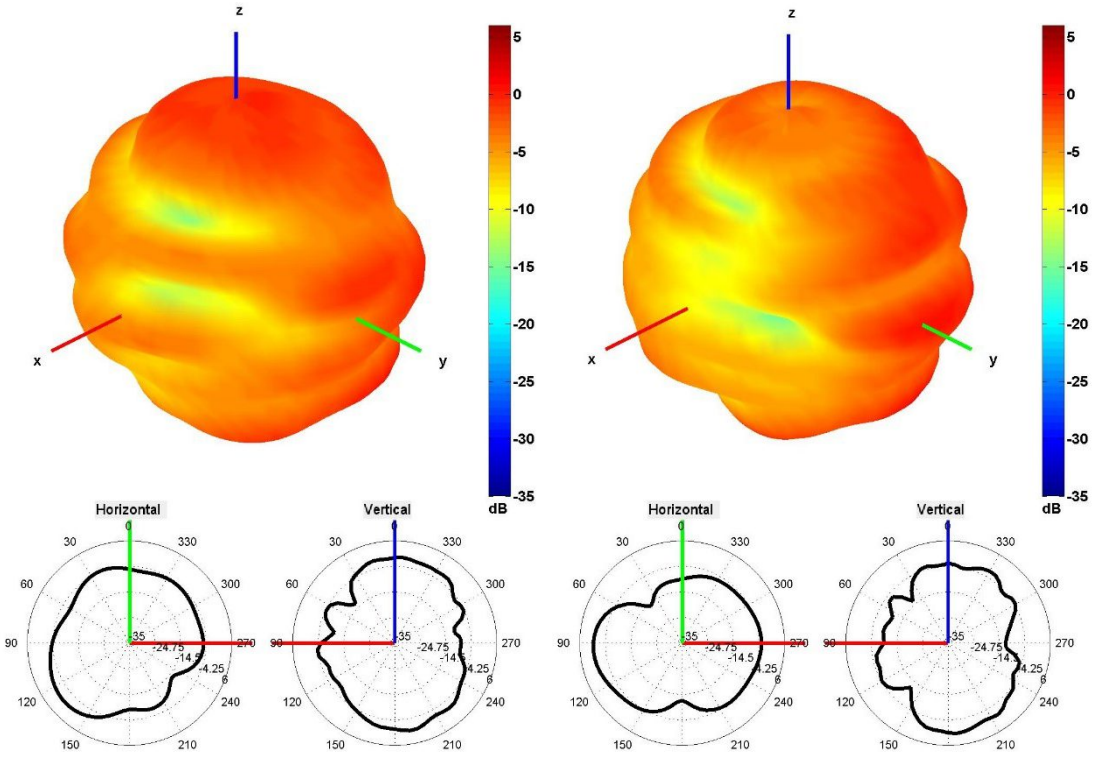

750 and 850 MHz Radiation pattern

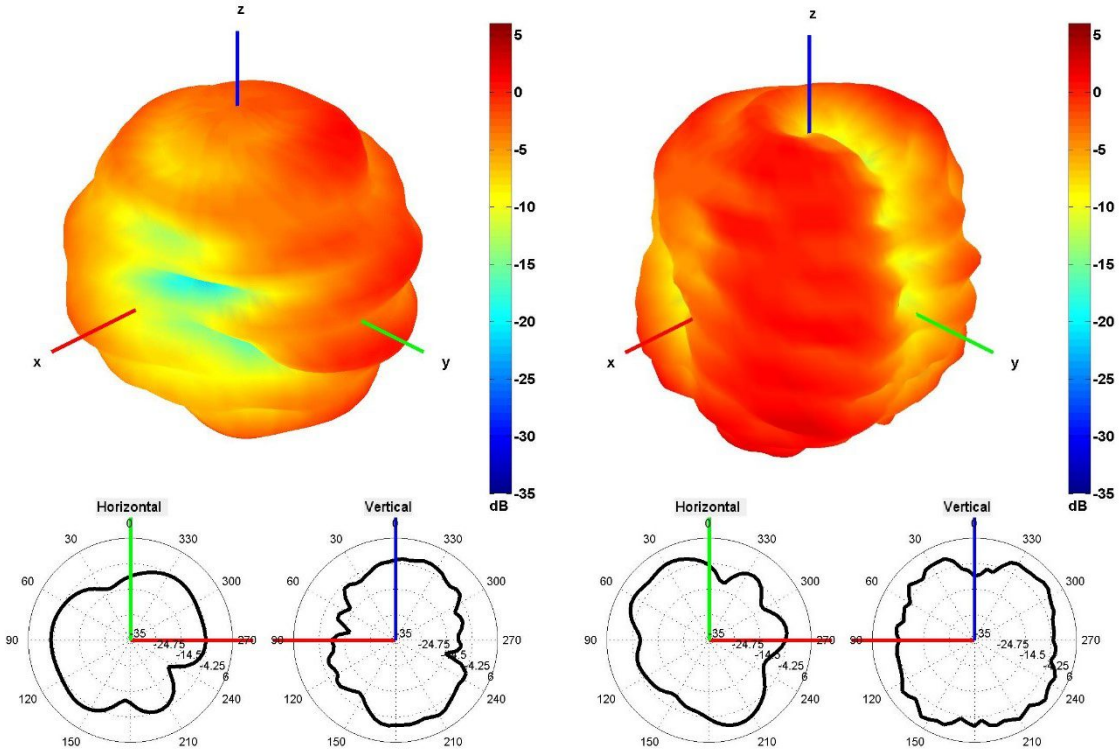

940 and 1750 MHz Radiation pattern

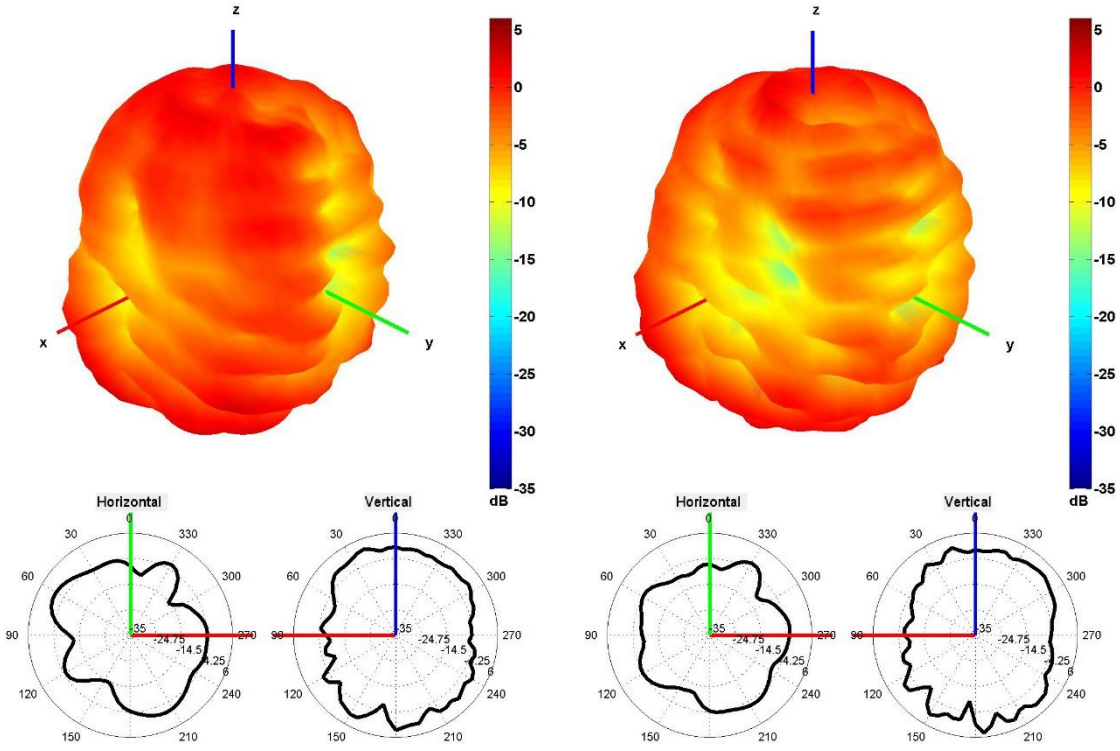

1850 and 1950 MHz Radiation pattern

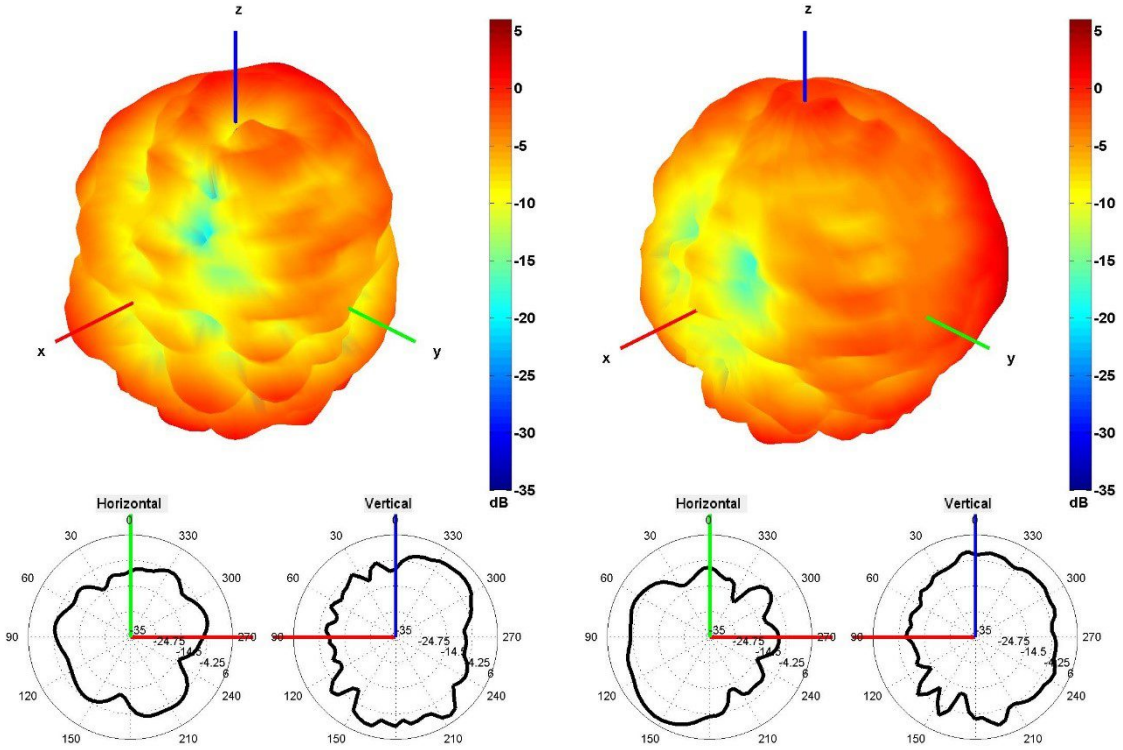

2100 and 2600 MHz Radiation pattern

5. Antenna drawings

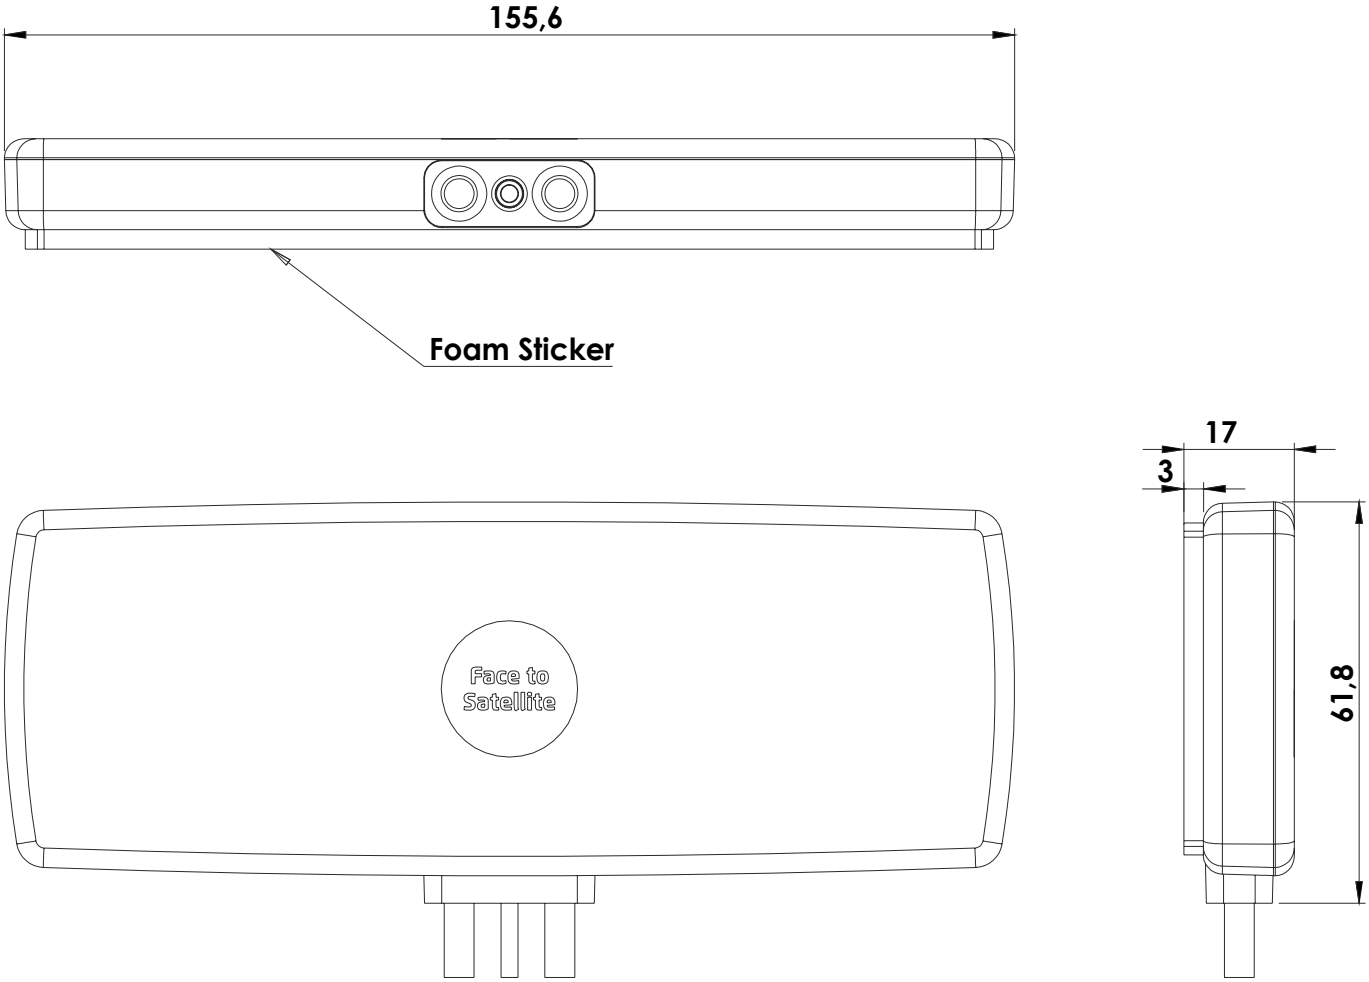

6. Antenna Images













