antenna conceptor

Product Datasheet

2J7702M

2.4/5.0 GHz ISM Magnetic Mount



Key Features

2.4/5.0 GHz ISM
- 2410-2490 MHz
- 4920-5925 MHZ

Magnetic Mount
High Performance
Ground Plane Dependent
Customizable Cable and Connector
Dimensions: Ø 54 x 68.2 mm
Certificates: IP67, IP69, IK09

antenna conceptor

1. Antenna and electrical specifications

Parameters	2.4/5.0 GHz ISM Antenna	
Standards	WiFi, BT, ZigBee, ISM	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	~-11.0	~-21.8
VSWR	~1.9:1	~1.2:1
Efficiency (%)	~60.1	~68.0
Peak Gain (dBi)	~1.8	~3.1
Average Gain (dB)	~-2.2	~-1.7
Impendance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	
Connector Type	SMA-Male-RP (Other connectors available)	
Cable Length	100 cm (Customizable length available)	
Cable Type	LL100 (Other cable type available)	

Antenna Measurement Conditions:

Mounted on 30 x 30 cm Ground Plane


LL100 100 cm Cable Length


Measured in Certified CTIA 3D Anechoic Chamber


2. Mechanical and environmental specifications


Specifications	2J7702M
Mounting Type	Magnetic Mount
Dimensions (mm)	Ø 54 x 68.2
Radome Type	ASA
Radome Color	Black
Antenna Base	Zamak
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69, IK09


3. Antenna parameters

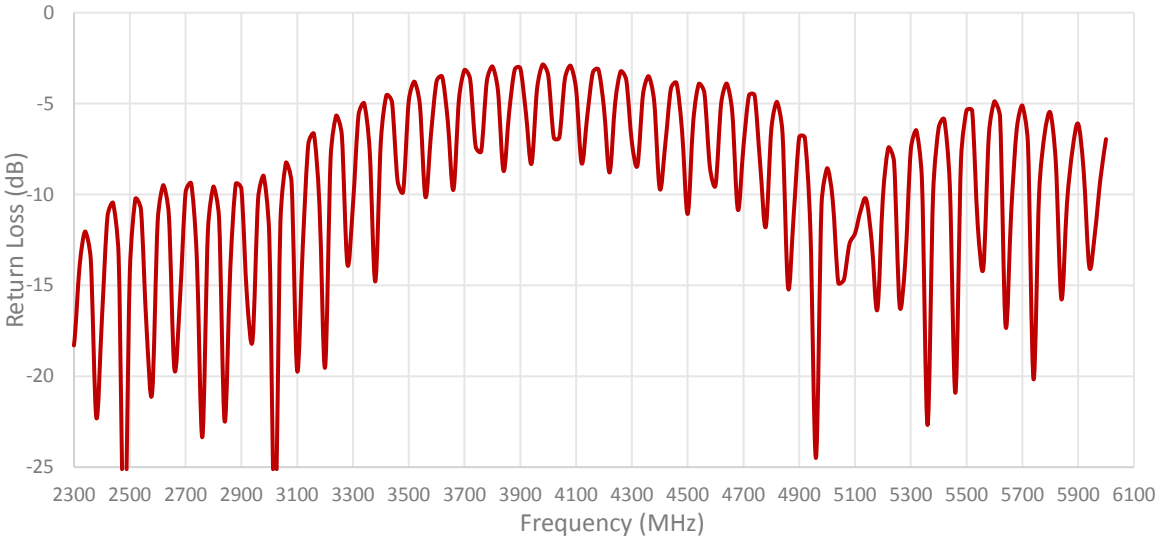


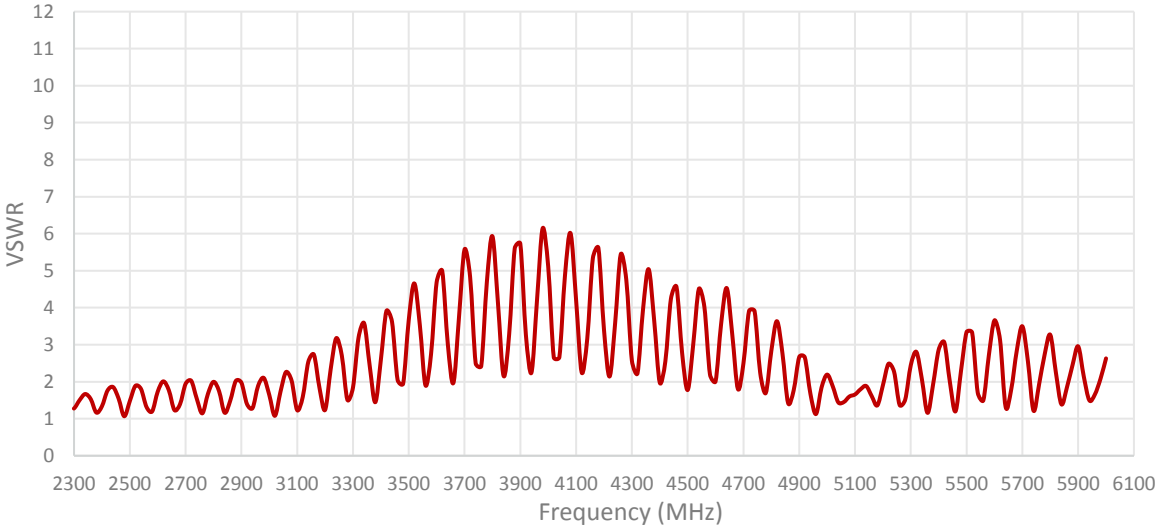

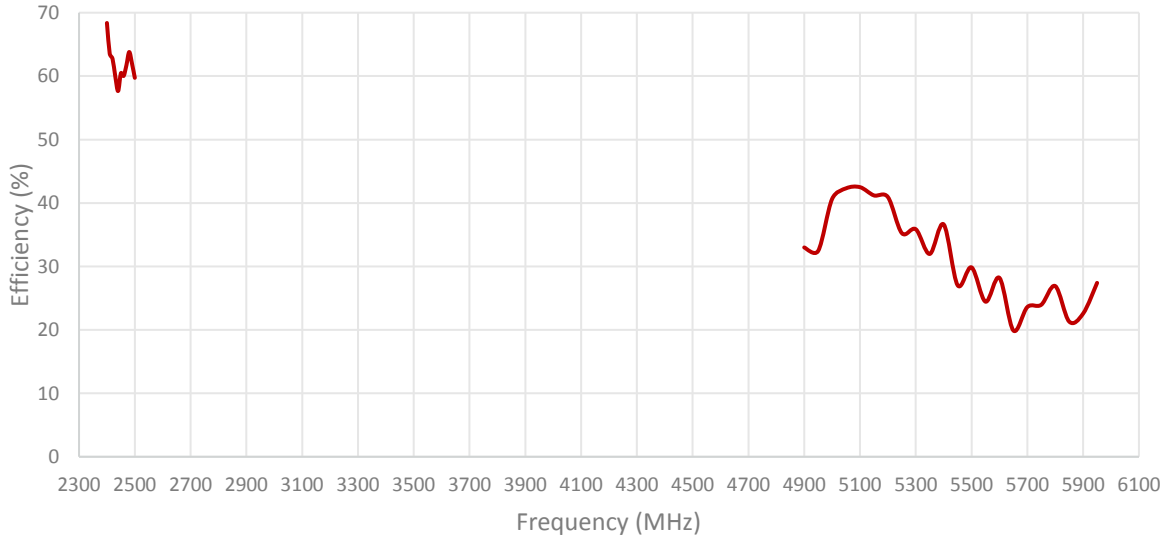

70
60
50
40
30
20
10
0
Efficiency (%)
2300 2500 2700 2900 3100 3300 3500 3700 3900 4100 4300 4500 4700 4900 5100 5300 5500 5700 5900 6100
Frequency (MHz)

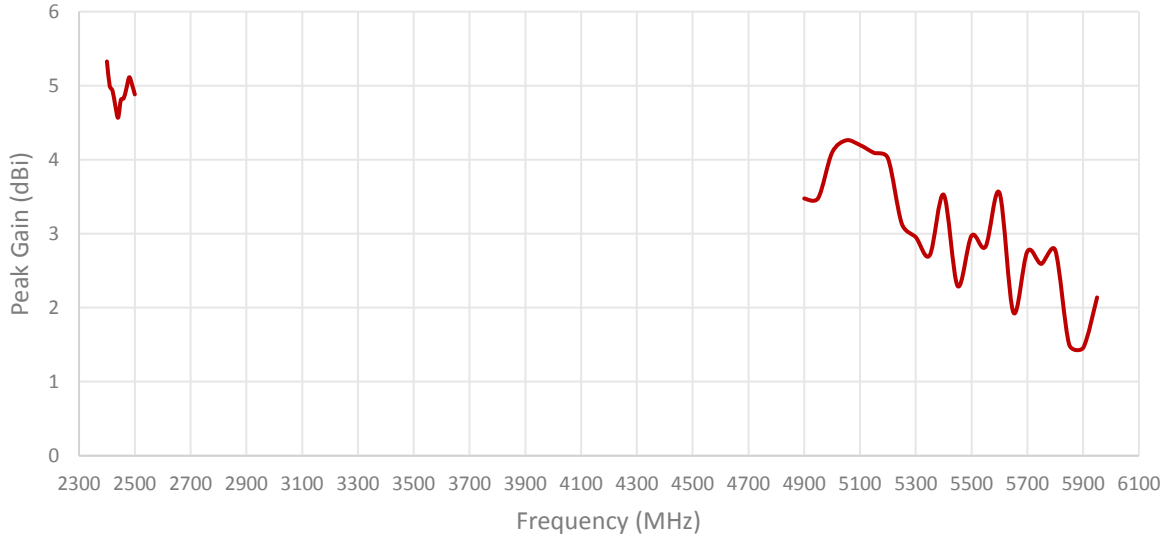
6
5
4
3
2
1
0
Peak Gain (dBi)
2300 2500 2700 2900 3100 3300 3500 3700 3900 4100 4300 4500 4700 4900 5100 5300 5500 5700 5900 6100
Frequency (MHz)

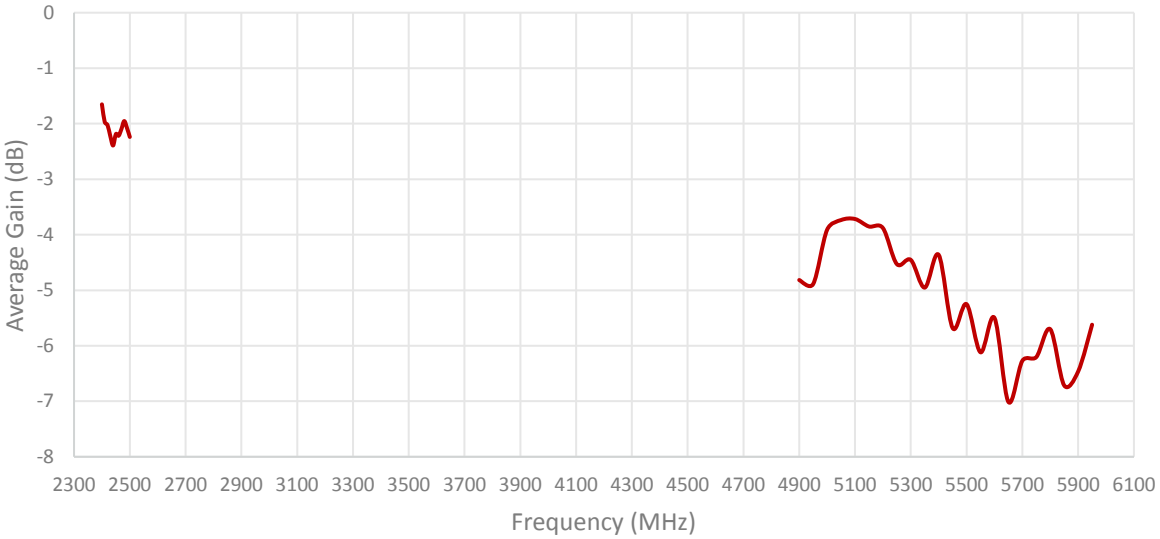

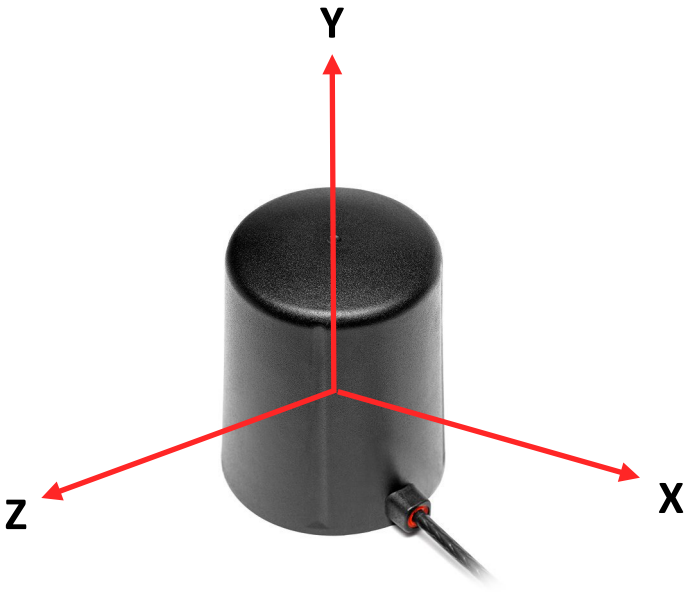



Radiation pattern reference

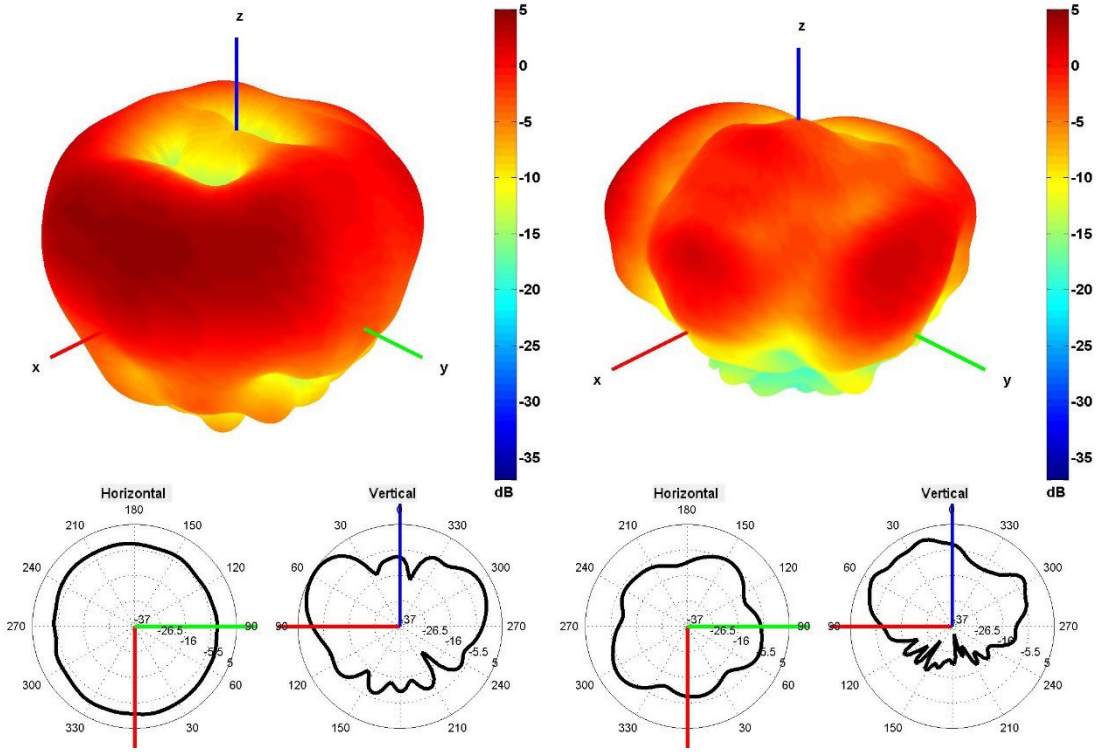

2450 and 5500 MHz Radiation pattern

4. Antenna drawings

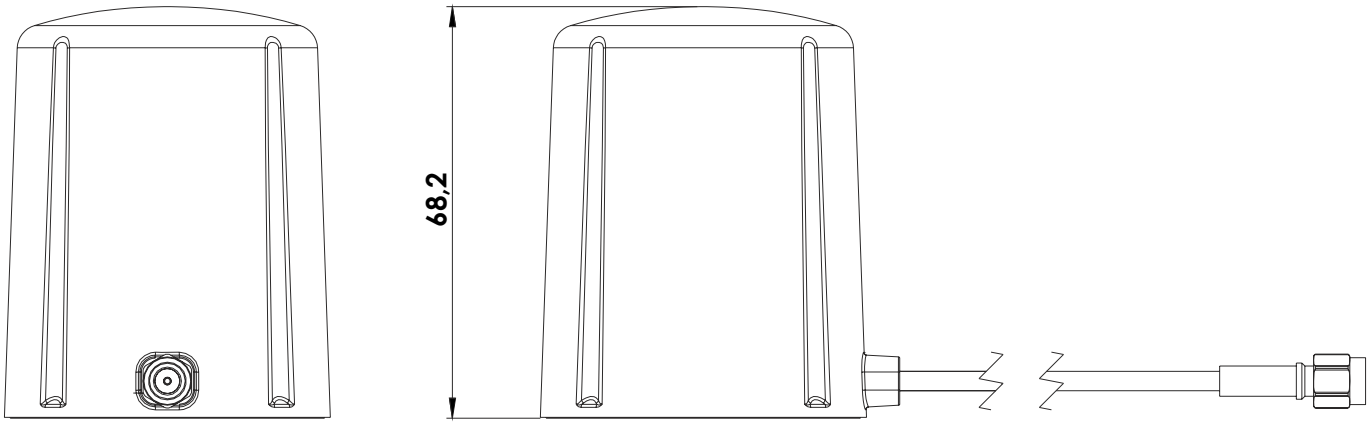

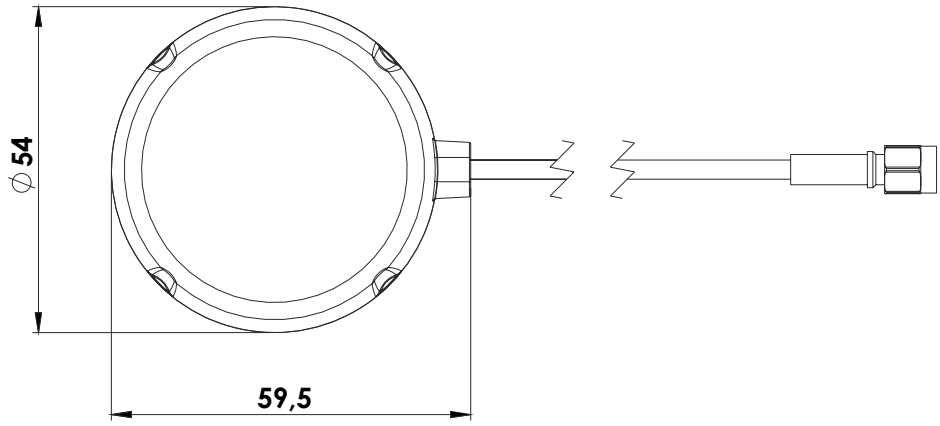

5. Antenna Images







