


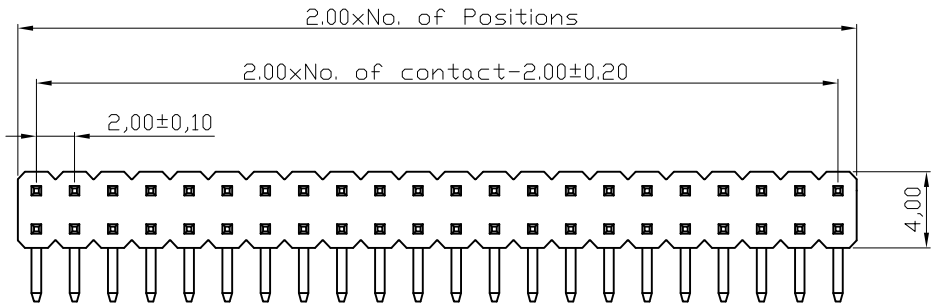


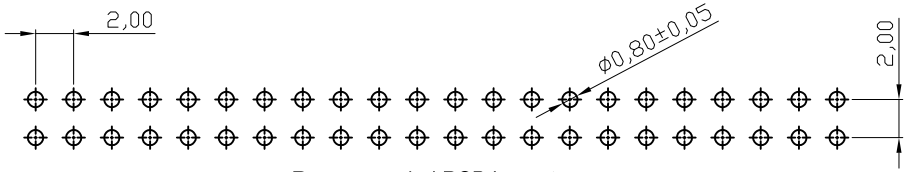

Recommended PCB Layout

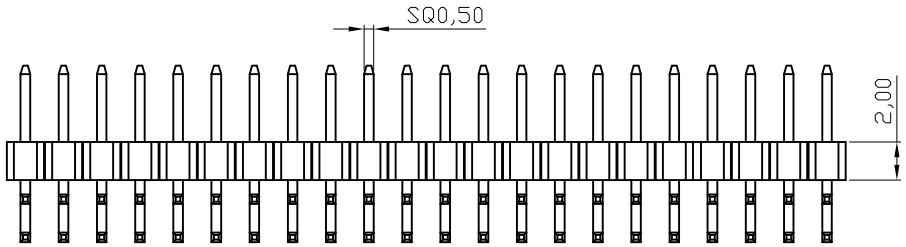



NOTES:

MATERIAL
1.Insulator Material:PBT+30%GF(UL94V-0), Black
2.Contact Material : Brass
3.Contact Plating : Gold flash over Ni
ELECTRICAL
1.Current Rating : 3.0Amps/contact max
2.Withstand Voltage : 1000V AC/minute
3.Contact Resistance : 20mΩ/contact max
4.Insulation Resistance: 1000MΩ min at Voltage=100V
ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Mechanical life cycle: min.200
Packing: PE Bag

Dimension antitheses list		
A	B	D
2.80	4.00	0.75

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
X.	±0.50
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
DIM	TOL
Angle	±5°

Id.	Modification	Date	Name
4	Change of Plant	27.09.2012	Amy
3	Sheet 2 cancelled	21.12.2009	Dean
2	Sheet 2 added	09.09.2009	Schulz
1	Drawn	02.02.2009	Dean

	Date	Name
Drawn	02.02.2009	Dean
Approved	27.09.2012	Amy

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-SL200-DA-GxxD

Drawing-No.
ASS 3341 CO

rev04

Replace

Sheet