

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/05/5

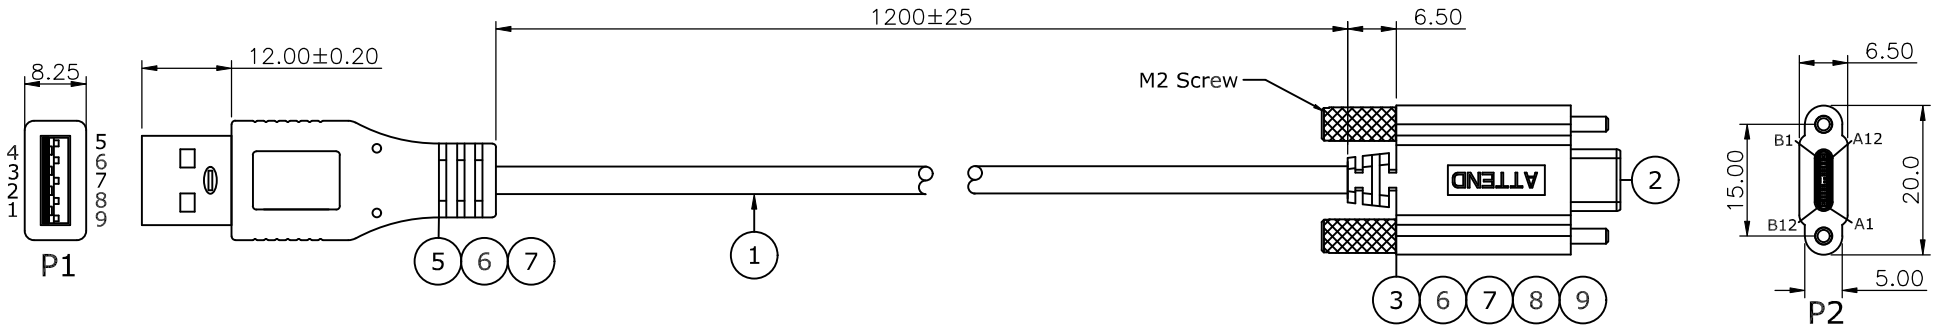


Inner mold:HY-HX-0205
External mold:HY-HX-0206

Mould No.:HY-032

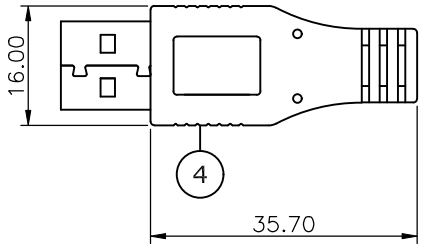

PIN ASSIGNMENT

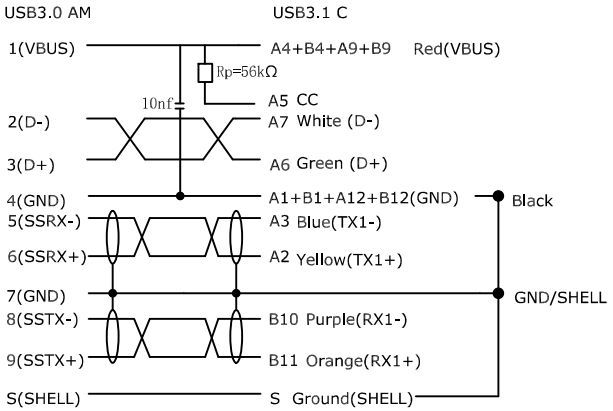

NOTES:

1. All cable 100% testing, any open, mis-wiring, short & intermittent are not permitted
2. RoHS compliance

TEST CONDITION:

1. 100% OPEN SHORT & MISWIRE TEST。
2. CONDUCTOR RESISTANCE: 3 Ohms Max。
3. INSULATION RESISTANCE: 5M Ohms Min。

NO.	PART NAME	DESCRIPTION
9	Screw	Screw M2
8	Double-sided	Double-sided conductive copper foil 22*30*0.06mm
7	Line tail	PVC 50P
6	External mold	PE
5	Wire Clamp	30#-24# Wire Clamp 3.0 Common Wire Single Layer Wire Clamp
4	USB 3.0	USB 3.0 AM blue plastic core nickel plated PIN
3	Wire Clamp	32#-24# Wire Clamp Single Layer Wire Clamp
2	Conn.	C-TYPE stretch case 3.2 version resistor 56K
1	CABLE	USB3.2(1P*30#+DAM)*2+1P*30#+2C*24#+F ADB OD:4.5mm L=1200 10G

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT: mm	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

ATTEND
www.attend.com.tw

DRAWN	Michael	2025/05/5
CHECKED	Fros	2025/05/5
APPROVED	Ken	2025/05/5

DRAWN NAME: USB 3.2 Gen1 Type C Dual Screw Locking to Type A Cable, Black PVC, OD:4.5mm, L=120CM

SCALE	SHEET	SIZE
1/1	1/1	A4

PRODUCT NO.	US-APCP-12002
FILE NAME	US-APCP-12002_B_1