
1 to 3 Channels AM (OOK) SAW transmitters with HCS 300 Encoder

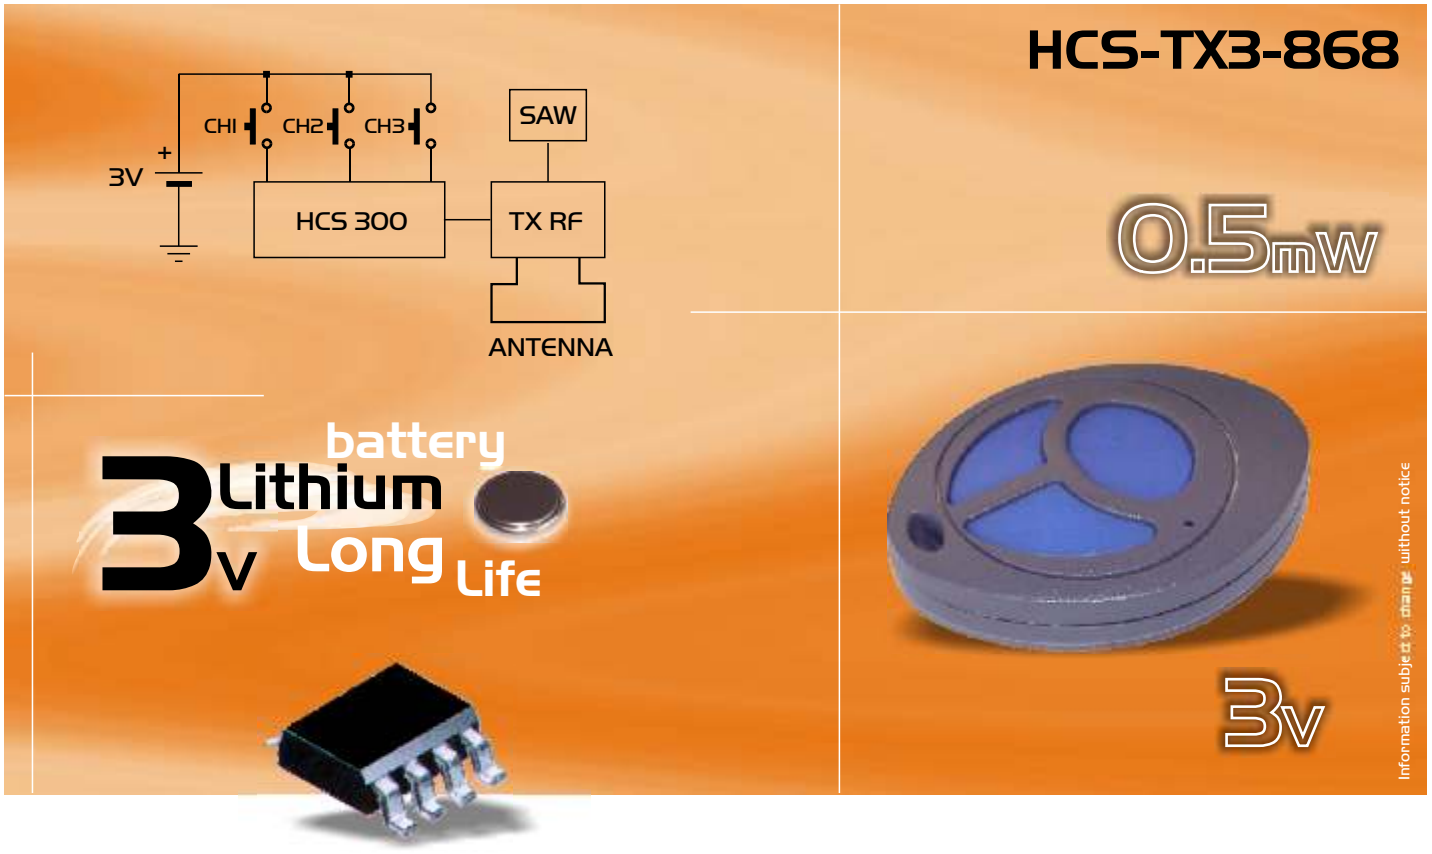


Description

Small dimension, hand-held RF transmitter with HCS 300 rolling code encoder.
Ideal for remote control applications requiring high security level.High performances from 3V lithium battery.
Null consumption in stand-by.
In compliance with EN 300 200, EN 301 489 & EN 60950.

Descrizione

Trasmettitore RF palmare di ridotte dimensioni dotati di encoder a codice dinamico HCS300. Ideale per applicazioni dove sia richiesto un elevato grado di sicurezza. Elevate prestazioni grazie all'impiego di batterie al litio 3V. Consumo nullo in stand-by. **Conforme alle Normative Europee EN 300 220, EN 301 489 ed EN 60950.**

Mechanical Dimensions



Technical Specification

Ta = 25 °C

	CHARACTERISTICS	MIN	TYP	MAX	UNIT
V_S	Lithium battery supply • Alimentazione con batteria al Litio		3		Vdc
I_S	Supply Current • Corrente assorbita		10		mA
F_C	RF carrier frequency • Frequenza portante RF		868.3		MHz
P_O	Effective radiated power • Potenza irradiata			0.5	mW
	HCS 300 encoder • Encoder HCS 300		63		bit
T_B	Lithium battery life • Durata batteria	3		5	years
T_{OP}	Operating temperature range • Temperatura di lavoro	+10		+55	°C

Product Code:
650200654 (HCS-TX2-868)
650200648 (HCS-TX3-868)

AUREL S.p.A. • Via Foro dei Tigli, 4 • I 47015 Modigliana (FC) Italy • Phone : +39-0546941124 • Fax : +39-0546941660
Internet : www.aurel.it • E-mail: aurel@aurel.it

Date: 20/06/2003