1/2/4 Chs keyfob transmitters with HT12E encoder

TX12E-1C-SAW-433
TX12E-2C-SAW-433
TX12E-4C-SAW-433





Descrizione

Trasmettitore palmare RF con risuonatore SAW, a 1-2-4 canali.
Ideale per applicazioni ove si richiedano comandi codificati, alta efficienza e bassa emissione di spurie.
Confome alle Normative Europee.

Description

1/2/4 channels RF transmitters with SAW filter oscillator.
Ideal for remote control applications. High efficiency and low spurious emission.
In compliance with European Normative.

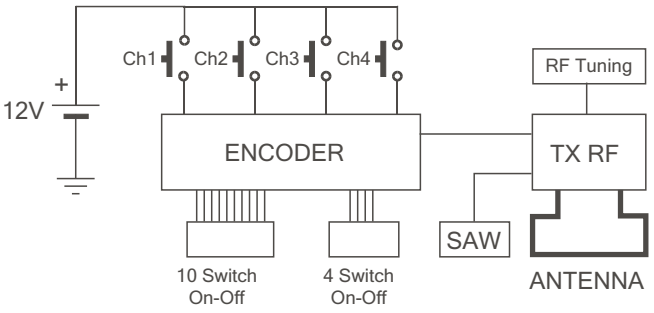

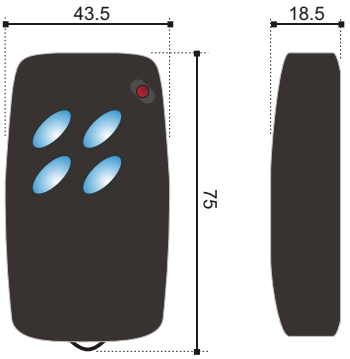

All dimensions are in millimeters

Specifiche Tecniche / Technical Specification

Ta = 25 °C

Caratteristiche	Characteristics	Min	Typ	Max	Unit
Alimentazione con batteria	Battery supply		12		Vdc
Corrente assorbita	Supply Current		7		mA
Frequenza portante RF	RF carrier frequency		433.92		MHz
Potenza irradiata	Effective radiated power			1	mW
Frequenza di clock encoder(1)	Encoder clock frequency(1)		1		kHz
Combinazioni	Codes			4096	
Temperatura di lavoro	Operating temperature range	-10		+55	°C

(1)Tolleranza: ±15%

(1)Tolerance: ±15%

Information subject to change without notice

AUREL S.p.A. • Via Foro dei Tigli, 4 • I 47015 Modigliana (FC) Italy • Phone : +39-0546.941124 • Fax : +39-0546.941660
http://www.aurelwireless.com • email: rfcomm@aurel.it

1/2/4 Chs keyfob transmitters with HT12E encoder

Modelli / *Models*

Part Number / Model



650200919
mod.TX12E-1C-SAW-433




650200918
mod.TX12E-2C-SAW-433



650200917
mod.TX12E-4C-SAW-433

Identificazione canali/tasti / *Channels/Keys identification*

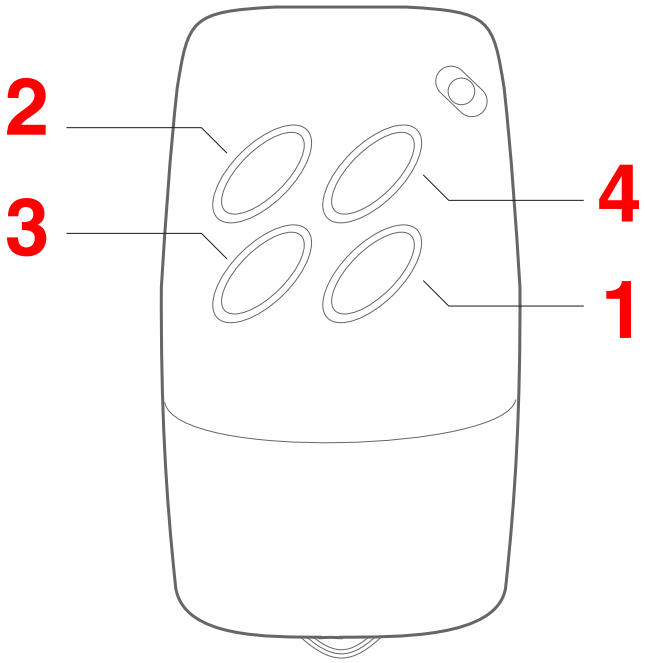


Information subject to change without notice

AUREL S.p.A. • Via Foro dei Tigli, 4 • I 47015 Modigliana (FC) Italy • Phone : +39-0546.941124 • Fax : +39-0546.941660
http://www.aurelwireless.com • email: rfcomm@aurel.it


1/2/4 Chs keyfob transmitters with HT12E encoder

Combinazioni encoder / *Encoder combination*

TX12E-1C-SAW-433

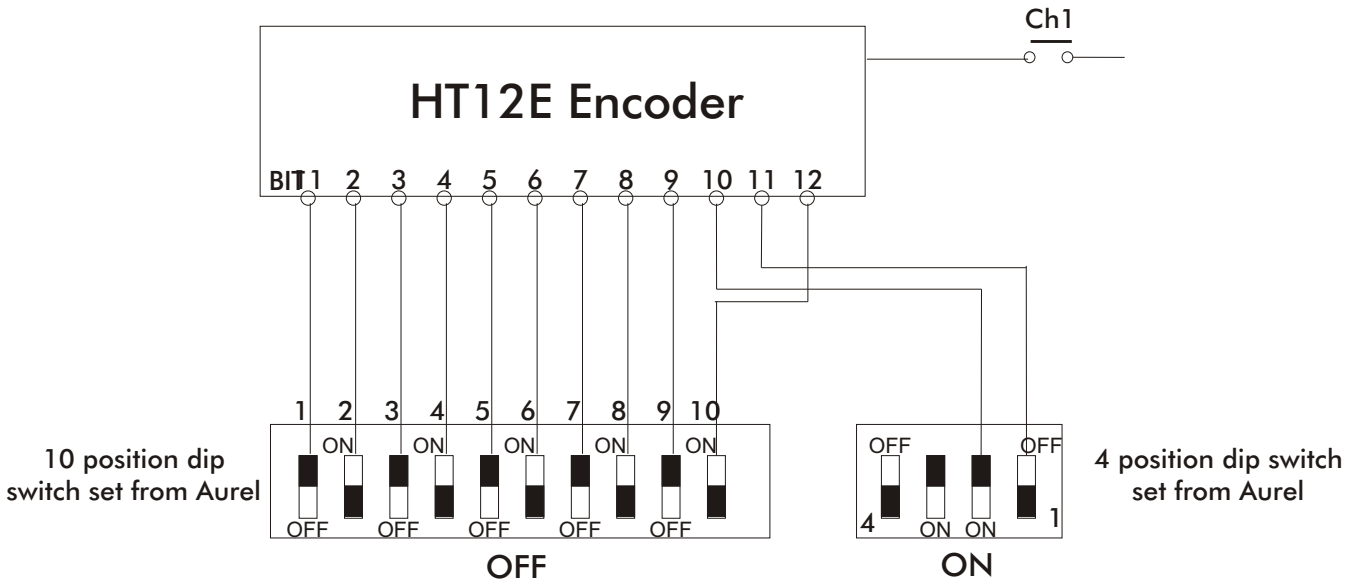

TX12E-2C-SAW-433

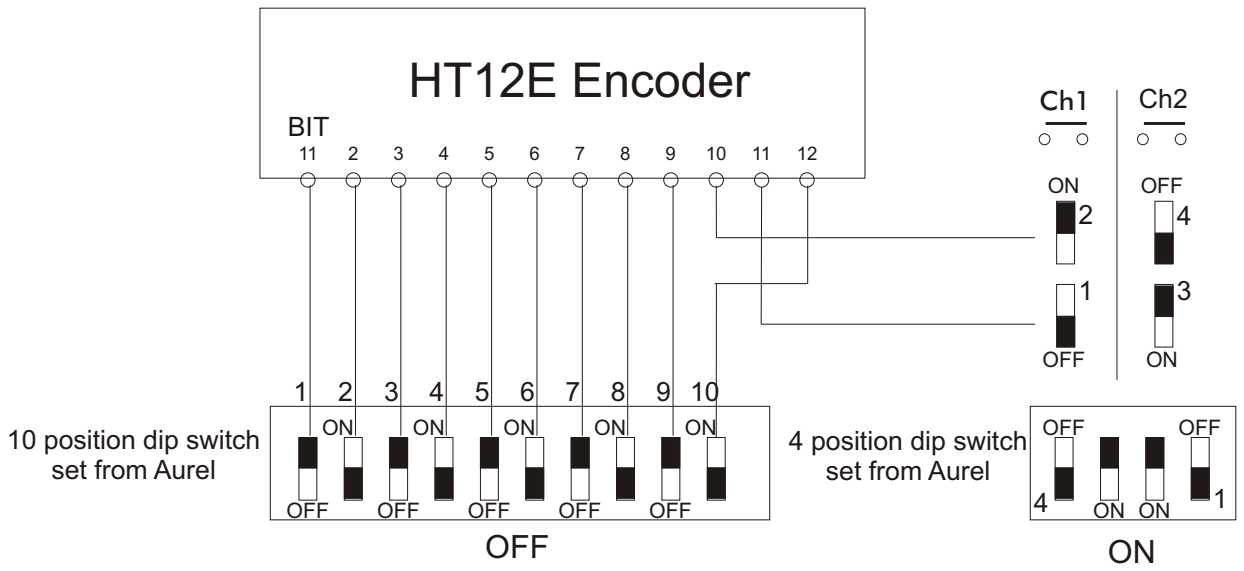

Vedi NOTA
See NOTE


Information subject to change without notice

AUREL S.p.A. • Via Foro dei Tigli, 4 • I 47015 Modigliana (FC) Italy • Phone : +39-0546.941124 • Fax : +39-0546.941660
http://www.aurelwireless.com • email: rfcomm@aurel.it

1/2/4 Chs keyfob transmitters with HT12E encoder


Combinazioni encoder / *Encoder combination*

TX12E-4C-SAW-433

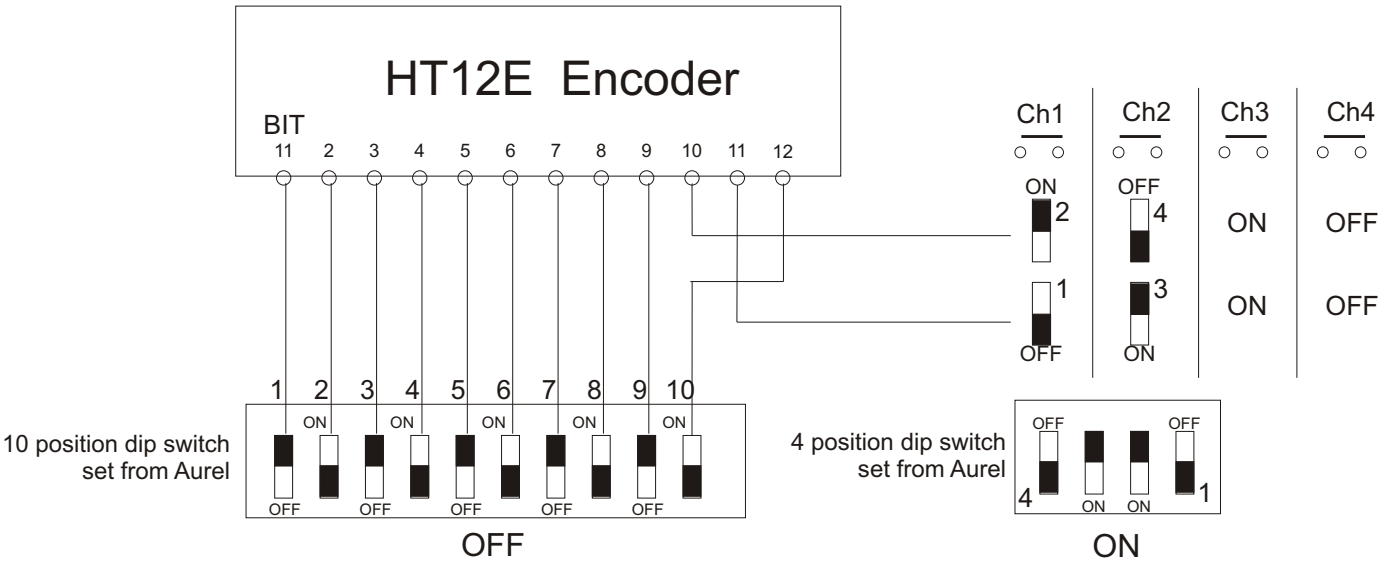

NOTA


Per rendere compatibile (a livello di decodifica) il TX12E-2C-SAW-433 (cod. 650200918) con i precedenti TX3750-2C-SAW-433 (cod. 650200312) occorre impostare il dip switch interno a 4 vie come di lato indicato:



ON

NOTE

Compatibility (as decoder) of new TX12E-2C-SAW433 (cod. 650200918) with former TX3750-2C-SAW433 (cod. 650200312) is obtained if the 4 vias dip switch inside the key-fob is modified as shown:



ON

Information subject to change without notice

AUREL S.p.A. • Via Foro dei Tigli, 4 • I 47015 Modigliana (FC) Italy • Phone : +39-0546.941124 • Fax : +39-0546.941660
http://www.aurelwireless.com • email: rfcomm@aurel.it