
Universal remote cloner

TX4 RP CP 433 N

P.N. 650201422G



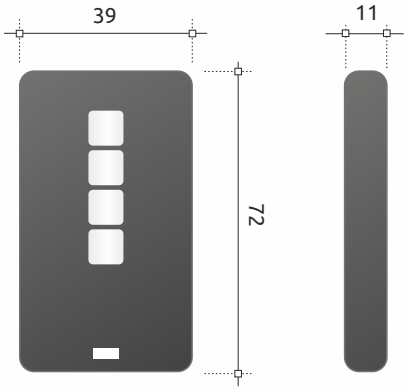

DESCRIZIONE

Trasmettitore palmare RF a 4 tasti con risuonatore SAW operante sulla frequenza di 433,92 MHz. Disponibili versioni con cornice in plastica o zama.

Il dispositivo ha la possibilità di apprendere ed utilizzare il codice di altri telecomandi che utilizzino codifiche non rolling.

DESCRIPTION

4 channels RF keyfob transmitter with SAW resonator operating at 433.92 MHz.

Available with plastic or chrome frame.

The transmitter offers the function to learn and use the code from other remote controls with fix code.

APPLICATIONS

- Home security
- Access control
- Burglar alarms
- Car alarms

TECHNICAL SPECIFICATION

Ta = 25 °C

CHARACTERISTICS	CARATTERISTICHE	MIN	TYP	MAX	UNIT
Battery supply	Alimentazione con batteria	2.1[1]	3	3.3	Vdc
Battery type	Tipo di batteria		CR2032		
Supply Current (TX mode)	Corrente assorbita (TX mode)		12[2]		mA
Supply Current (Power down)	Corrente assorbita (Power down)		2		µA
Effective radiated power	Potenza irradiata		0.5		mW
Operating temperature range	Temperatura di lavoro	-10		+55	°C

[1] Learn function disabled with battery level below 2,6V to avoid memory corruption.
[2] Current consumption depends on encoding type.

Information subject to change without notice

15.10.2016 - Rev A

AUREL S.p.A. • Via Foro dei Tigli, 4 • 47015 Modigliana (FC) Italy • Ph. +39 0546 94 11 24 • F. +39 0546 94 16 60 | www.aurelwireless.com • rfcomm@aurel.it

This information may be subject to revision without notice. AUREL makes no warranty and assumes no liability in connection with any use of this information.