
# Datasheet

Item no. 1587737


V1_0817_01_en

# Push-Button Switch



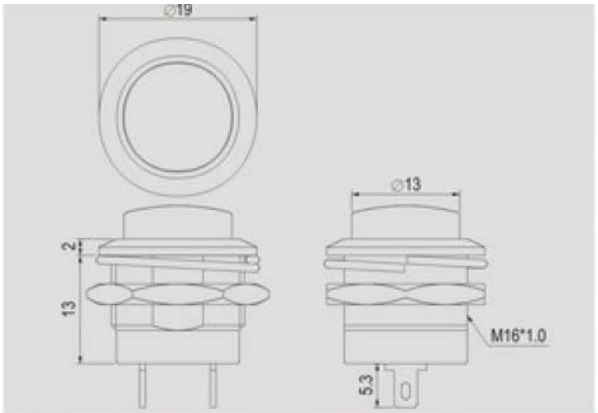


| Rating |
| --- |
| 6A 125V AC<br>3A 250V AC |
| Contact resistance |
| 50mΩ Max |
| Insulation resistance |
| DC 500V 100MΩ Min |
| Dielectric strength |
| AC 1000V 1 minute |
| Cut-out |




6 mm max


## FEATURES

* MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
* M type are metal frames, nickel plated brass.
* Mounted by nut.

| BODY | | FUNCTION | TERMINAL |
| --- | --- | --- | --- |
| Plastic Body | M Metal Body | A | 0 5 0 SO |








* ( ) =momentary

Unit: mm

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).
All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.