Datasheet

Item no. 701830/ 701844/ 701856/ 701906/ 701918/ 701930

V1_0717_01_en


TECHNICAL DESCRIPTION

Lamp Ratings


Lamp Type	LED		
Rated Voltage	AC/DC6V	AC/DC12V	AC/DC24V
	AC/DC110V	AC/DC220V	
Colours	R G Y O B W		
Life	About 40,000 hours		

Note: There are protective resistor in the lamp, special voltage rate can be made to order.

Switching Operation



NO.2



NO.3

Soldering information

- Handiwork solding: Soldering iron 30W or under at 230℃ for 3 sec max.

Datasheet

Item no. 701830/ 701844/ 701856/ 701906/ 701918/ 701930


V1_0717_01_en

METAL PUSHBUTTONS

RING ILLUMINATED PUSHBUTTON



- Φ19mm diameter
- Combined Structure
- 5A, 250VAC
- 1NO1NC/2NO2NC/3NO3NC
- The Front Shape：Flat Round
- The crust material：Stainless Steel
- Ring Illuminated
- IP Degree：IP67

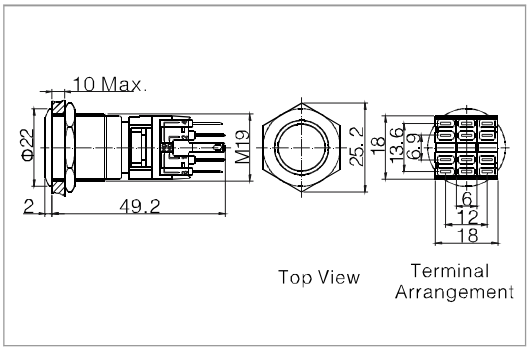

701830 : dia.19mm, 5A/250VAC, 1NO1NC, Momentary, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Red 12V LED

701844 : dia.19mm, 5A/250VAC, 1NO1NC, Momentary, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Blue 12V LED

701856 : dia.19mm, 5A/250VAC, 1NO1NC, Momentary, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Green 12V LED

701906 : dia.19mm, 5A/250VAC, 1NO1NC, Alternate, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Blue 12V LED

701918 : dia.19mm, 5A/250VAC, 1NO1NC, Alternate, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Green 12V LED

701930 : dia.19mm, 5A/250VAC, 1NO1NC, Alternate, Stainless steel crust, Pin terminal, Flat actuator, Ring illuminated, Red 12V LED

Datasheet

Item no. 701830/ 701844/ 701856/ 701906/ 701918/ 701930

V1_0717_01_en

METAL PUSHBUTTONS

Item no.		701830 701844 701856 701906 701918 701930
The Front Shape		Flat Round
Terminations		Soldering(Pin Terminal)/2.8mm tabs
Switching		NO.2
Max. Switch Rating		5A/250VAC
Contact Resistance		≤50mΩ
Insulation Resistance		≥1000MΩ
Dielectric Strength		2000VAC
Operating Temp.		- 20℃ ~ + 70℃
Mechanical life		1,000,000 cycles
Electrical life		50,000 cycles
Contact material		Silver Alloy
Panel Thickness		1~10mm
Torque		5~14Nm
Operation Pressure		5.5N
IP Degree		IP67
Material	Button	Stainless Steel
	Body	Stainless Steel
	Base	PA
	RoHS	Yes
LED Spec.	Type	Ring Illuminated(LED)
	Rated Voltage	6V / 12V / 24V / 110V / 220V
	Color	R G Y O B W
	Life	40,000 hours

This is a publication by Conrad Electronic SE, Klaus-Conrad-Str. 1, D-92240 Hirschau (www.conrad.com).
All rights including translation reserved. Reproduction by any method, e.g. photocopy, microfilming, or the capture in electronic data processing systems require the prior written approval by the editor. Reprinting, also in part, is prohibited. This publication represents the technical status at the time of printing.

© Copyright 2017 by Conrad Electronic SE.