
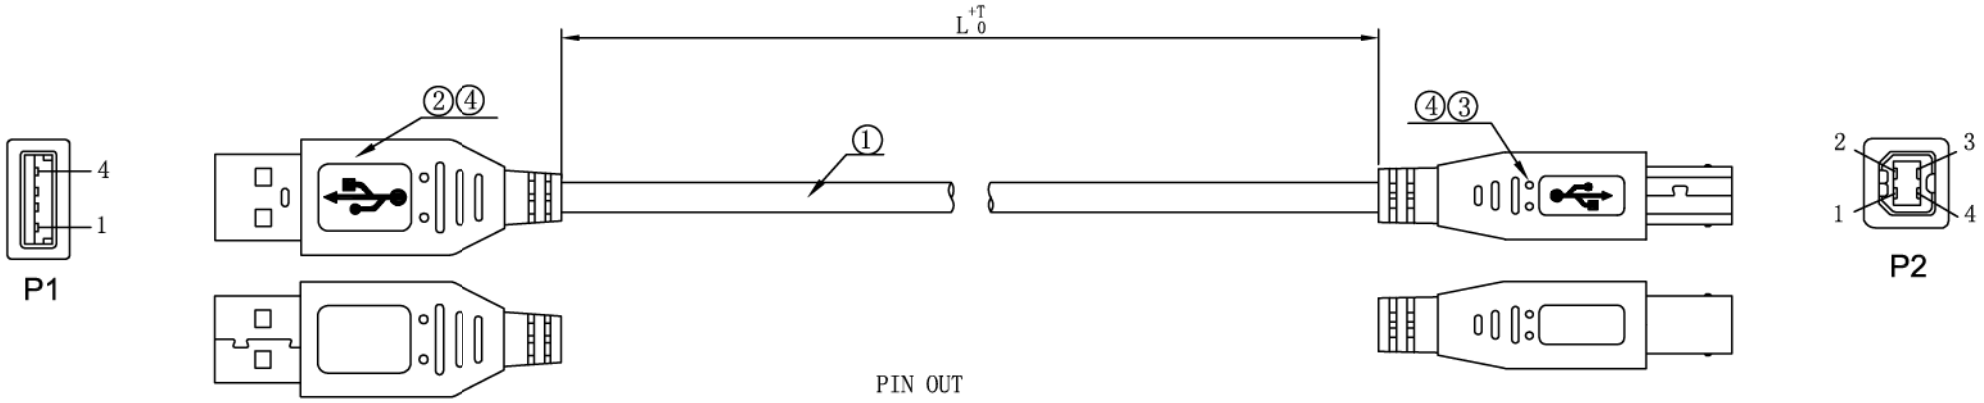


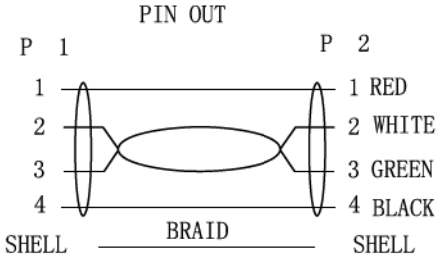

NOTE:

1. Electrical test:
   (1). 100% open short & miss wire test;
   (2). Insulation resistance:DC 300V 10MΩ;
   (3). Contactor resistance:3Ω Max;
   (4). Dielectric strength:100V AC/Minute, 1mA.
2. PRINT WORD:AWM STYLE 2725 80℃ 30V VW-1
   28AWG×1P 28AWG×2C
3. PACKING:1PCS/PE BAG
4. ROHS AND REACH COMPLIANT

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
④	OUTER MOLD	PVC COLOR FOR TRANSPARENT	2	
③	USB B TYPE	USB B/M SOLDER TYPE, WHITE PBT INSULATION, THE PIN GOLD PLATING, THE SHELL FOR NICKEL PLATING	1	
②	USB A TYPE	USB A/M SOLDER TYPE, WHITE PBT INSULATION, THE PIN GOLD PLATING, THE SHELL FOR NICKEL PLATING	1	
①	CABLE	USB2.0 28AWG(7/0.12BC)*1P+28AWG(7/0.12BC)*2C+AL-FOIL+ BRAID(16/3/0.12)AL-MG PVC/TRANSPARENT JACKET OD:4.0±0.2MM	1	


[redacted]

TEL:[redacted];FAX:[redacted]

CUSTOMER	[redacted]	ITEM NO.	SEE THE CHART		
PRODUCT NAME	USB 2.0 AM/BM	UNO ITEM NO.		UNIT	MM

		NEW	2013.06.05	A	DRAWNBY	CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	FERGUS			2013.06.05

ITEM NO.	LENGTH
	500+60/-0
	1000+60/-0
972030	1800+100/-0
972387	3000+100/-0
972317	5000+100/-0

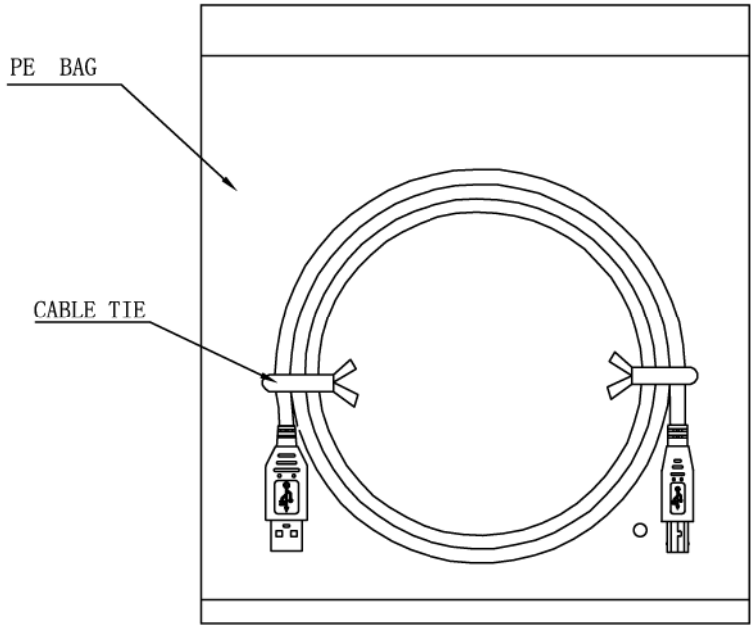

[redacted]

TEL: [redacted]

CUSTOMER	[redacted]			ITEM NO.	SEE THE CHART				
PRODUCT NAME	USB 2.0 AM/BM			UNO ITEM NO.		UNIT	MM		
		NEW	2013.06.05	A	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	FERGUS			2013.06.05	