

MBE15x-5-V-L

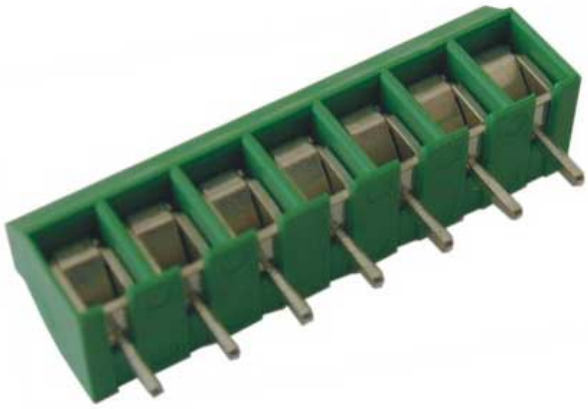

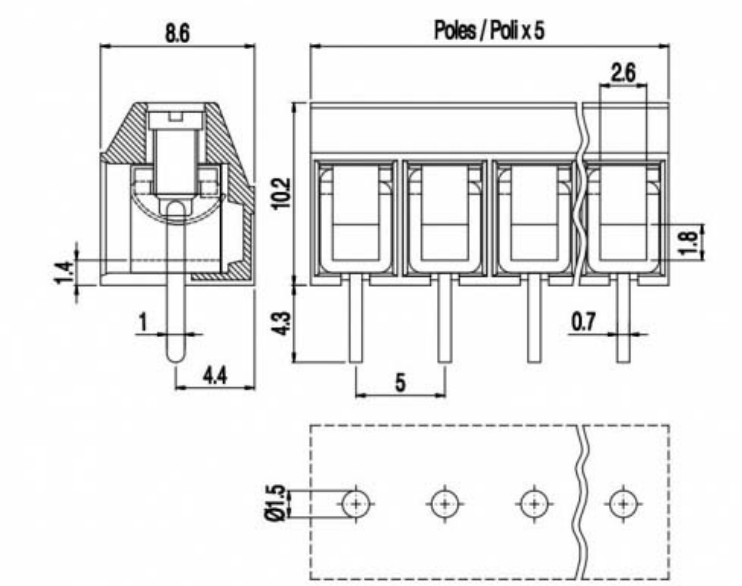

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Morsettiera Monopiano - Versione Liscia - Passo 5mm - 2÷12 poli

GENERAL INFORMATION

pitch:	5 mm
housing height:	10,20 mm
housing depth:	8.6 mm
dimensional class:	slow
wire section:	2.5 mm² / 14 AWG
clamp opening size:	2.6 × 2 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2.5
max. torque:	0.4 Nm / 3.6 in.lbs

APPROVALS DATA

	EN 60998-1	EN 60998-1	UL 1059
current:	17.5A	24A	20A factory / 15A field
voltage:	450V	450V	300V
wire section:	1.5mm ^{2}	2.5mm ^{2}	14÷30AWG
torque:	0.4Nm	0.4Nm	3.6Lb-in
FILE:	EP151	40019705	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS

GN (STD) GY BK BL RD YL OG

Copyright ©2020 - euroclamp - http://www.euroclamp.it

clamp/spring:	Tin-plated copper alloy	other colours:	upon request
terminal:	Tin-plated copper alloy		

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MBE152-5-V-L	N/A	N/A	N/A
3	MBE153-5-V-L	N/A	N/A	N/A
4	MBE154-5-V-L	N/A	N/A	N/A
5	MBE155-5-V-L	N/A	N/A	N/A
6	MBE156-5-V-L	N/A	N/A	N/A
7	MBE157-5-V-L	N/A	N/A	N/A
8	MBE158-5-V-L	N/A	N/A	N/A
9	MBE159-5-V-L	N/A	N/A	N/A
10	MBE1510-5-V-L	N/A	N/A	N/A
11	MBE1511-5-V-L	N/A	N/A	N/A
12	MBE1512-5-V-L	N/A	N/A	N/A

Copyright ©2020 - euroclamp - http://www.euroclamp.it