
MPT1010-O



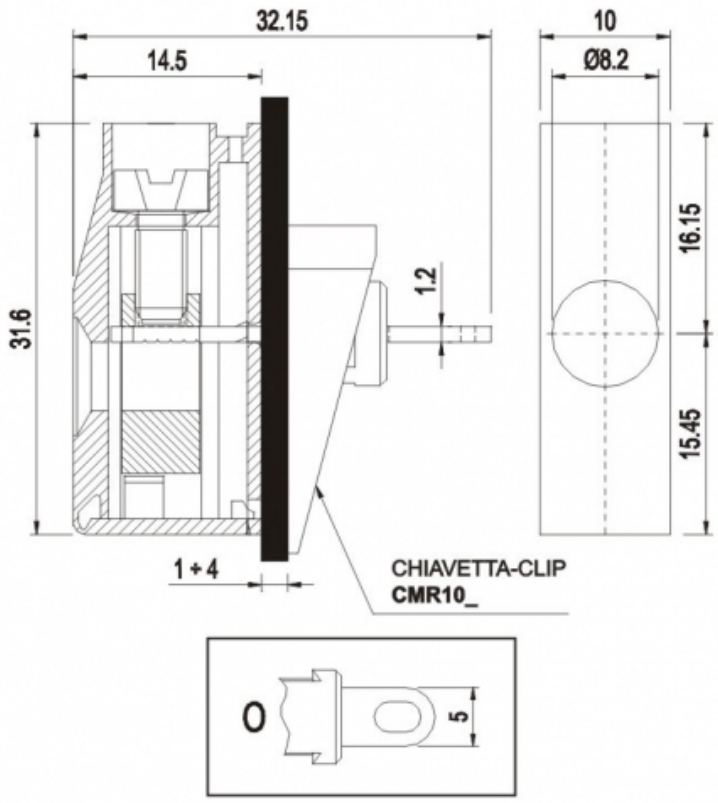

Panel feed-through terminal block - Fixed by clip - Modular version - Drilled terminal - Pitch 10mm - 1 pole

GENERAL INFORMATION

pitch:	10 mm
housing height:	31,60 mm
housing depth:	14.5 mm
dimensional class:	n/a
wire section:	10 mm² / 8 AWG
clamp opening size:	ø8.2 mm
wire stripping:	max 13.5 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	57A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	1.2 Nm / 10.8 in.lbs

APPROVALS DATA

	EN 60998-1	EN 60998-1	UL 1059
current:	57A	57A	65A factory / 65A field
voltage:	450V	450V	600V
wire section:	10mm ²	10mm ²	6÷30AWG
torque:	1.2Nm	1.2Nm	15.8Lb-in

Copyright ©2020 - euroclamp - http://www.euroclamp.it

FILE: CA02.01616 40014733 E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
1	MPT1010-O	N/A	N/A	N/A

Copyright ©2020 - euroclamp - http://www.euroclamp.it