

PT15

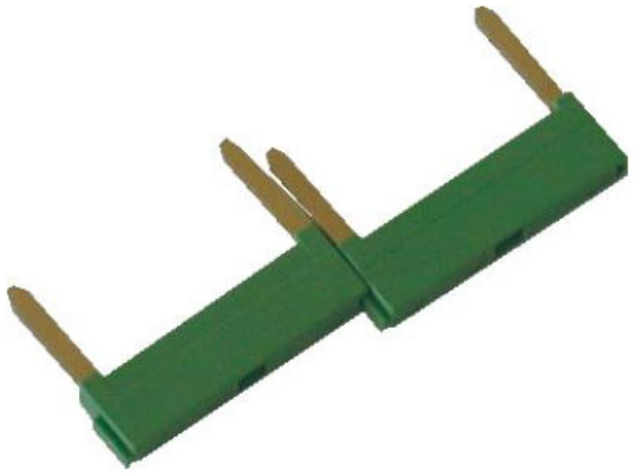

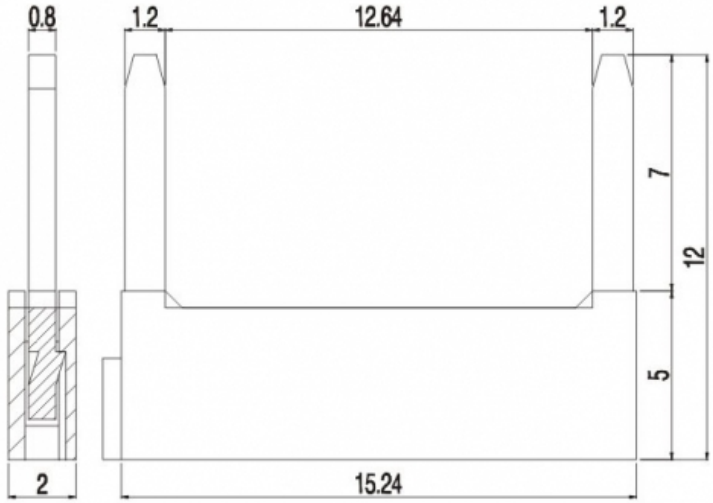

Insertion bridge - Pitch 15,24 - Modular

GENERAL INFORMATION

pitch:	15,24 mm
housing height:	5,00 mm
housing depth:	2 mm
dimensional class:	n/a
wire section:	-
clamp opening size:	
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	-V
impulse voltage:	- kV

MECHANICAL CHARACTERISTICS

-	-

APPROVALS DATA

	-	-	-
current:	-	-	-
voltage:	-	-	-
FILE:	-	-	-

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS

GN GY BK BL RD YL OG

other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	PT15	N/A	N/A	N/A

Copyright ©2020 - euroclamp - http://www.euroclamp.it