

ZRM.5

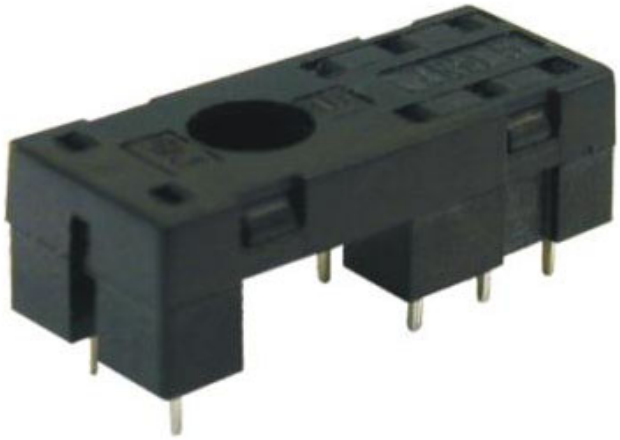

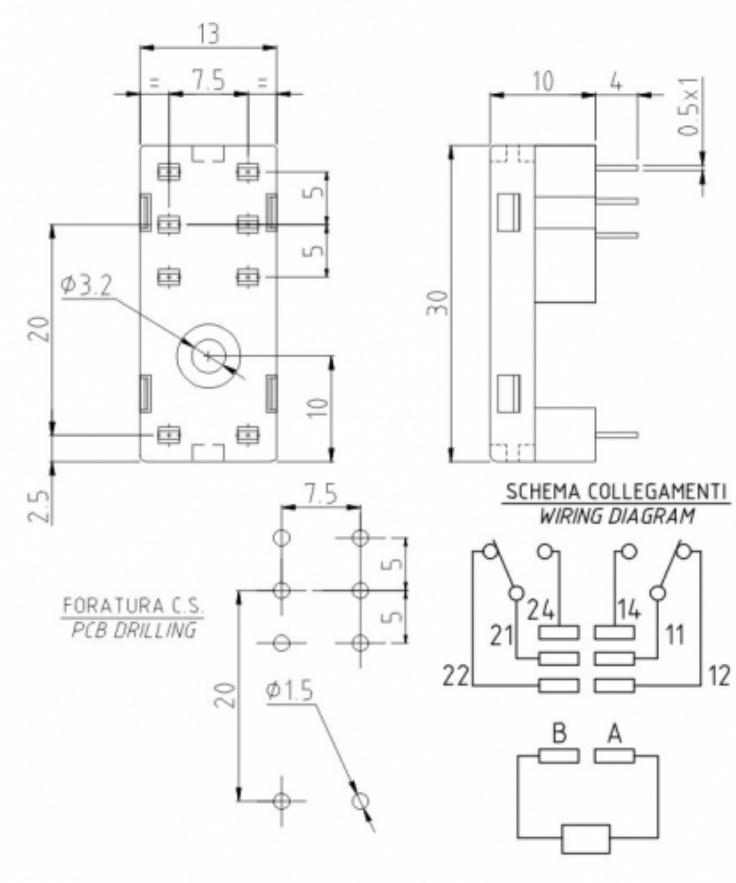

PCB relay socket

GENERAL INFORMATION	
pitch:	- mm
housing height:	10,00 mm
housing depth:	13 mm
dimensional class:	n/a
wire section:	-
clamp opening size:	
wire stripping:	-
operating temperature:	-30°C ÷ +70°C

ELECTRICAL CHARACTERISTICS	
current:	10A
voltage:	250V
test voltage:	2 kVrms/60s
insulation resistance	>100 M?

MECHANICAL CHARACTERISTICS		
-		-

APPROVALS DATA

	EN 61984	UL 508	UL 508
current:	10A	10A	10A factory / A field
voltage:	250V	250V	300V
FILE:	CA02.03022	091956_0_000	E135170

MATERIALS

AVAILABLE COLOURS

Copyright ©2020 - euroclamp - http://www.euroclamp.it

housing:	PPE - UL 94 V1	BK	
screw:	n/a		
clamp/spring:	n/a	other colours:	upon request
terminal:			

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
-	ZRM.5	N/A	N/A	N/A

Copyright ©2020 - euroclamp - http://www.euroclamp.it