
ZRSL



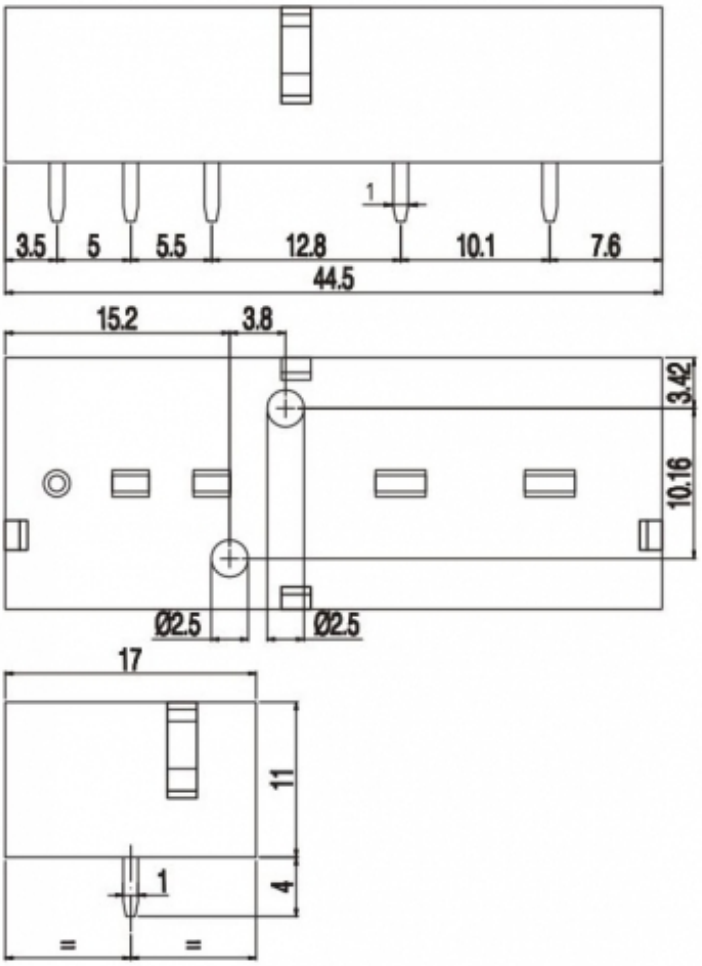

Solid state relay socket

GENERAL INFORMATION	
pitch:	- mm
housing height:	11,00 mm
housing depth:	17 mm
dimensional class:	n/a
wire section:	-
clamp opening size:	
wire stripping:	-
operating temperature:	-30°C ÷ +70°C

ELECTRICAL CHARACTERISTICS	
current:	5A
voltage:	250V
test voltage:	2 kVrms/60s
insulation resistance	>100 M?

MECHANICAL CHARACTERISTICS		
-		-

APPROVALS DATA

	-	-	-
current:	-	-	-

voltage:	-	-	-
FILE:	-	-	-

MATERIALS

housing:	PPE - UL 94 V1
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
-	ZRSL	N/A	N/A	N/A

Copyright ©2020 - euroclamp - http://www.euroclamp.it