

lithium sub-battery,ER17505H-2 / W120, lead, peel 1CM on tin

Undeslared tolerance		sign	date	Description of shanges	to bear
Basic dimensions	Tolerance range				
0.0-0.5	±0.05				
5.0-10.0	±0.08				
> 10.0	±0.13				

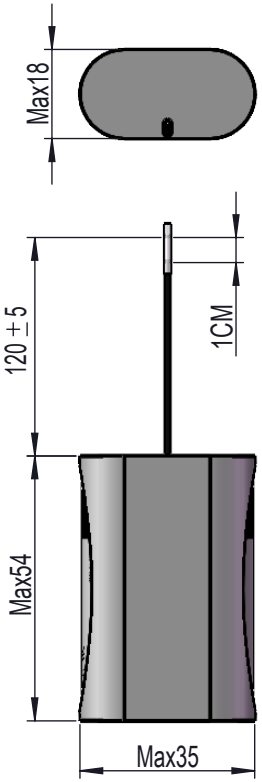

客户回签 Customer signature	
公司名称 Company name	
批准人 Approved by	
签字 (盖章) 日期 Signature date	

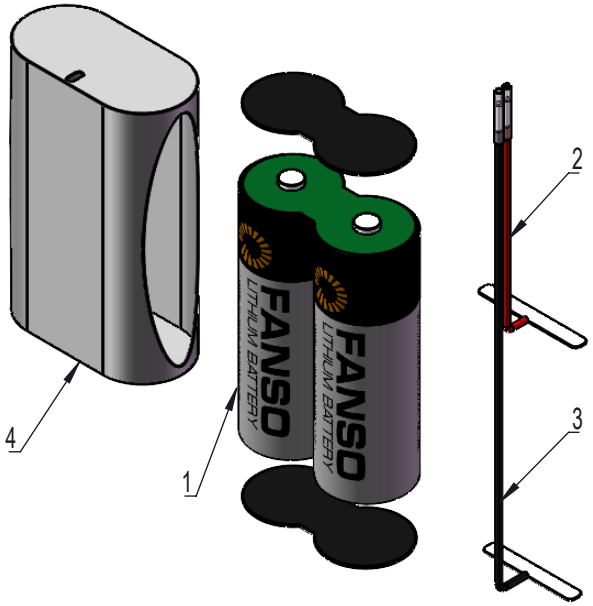

Spray code: ER17505H-2
25.92Wh 7.2Ah 3.6V
YYMMDD

NO.	MATERIAL	SPECIFICATION	QTY	MARK
4	Sleeve	gray PVC	1	
3	Cable	UL1007-20# Black	1	
2	Cable	UL1007-20# Red	1	
1	Cell	ER17505H	2	

Technical requirements
1. Open circuit voltage≥3.64V,load voltage 82.5Ω≥3.20V.
2. The battery shall be free of leakage,damage and dirt.

FANSO Wuhan FANSO Technology co.,Ltd
Property of FANSO,copy is prohibited

design		technique		Machine				The part name	finished product		
drawing	Zhu xue ping	quality		drawing number				Material number			
audit		approval		Material				version	A0	View orientation	
standard		date	2023/7/3	Stage markers	F	C	Z	D	S	unit	mm
				date					√	size	A4
				The first one-one in total			Weight	Proportion			