

DIMENSIONS:	
A	3.125" ±0.063
B	4.063" ±0.125
C	3.750" ±0.063
D	1.975" ±0.063
E	2.500" ±0.063
F	3.125" ±0.063

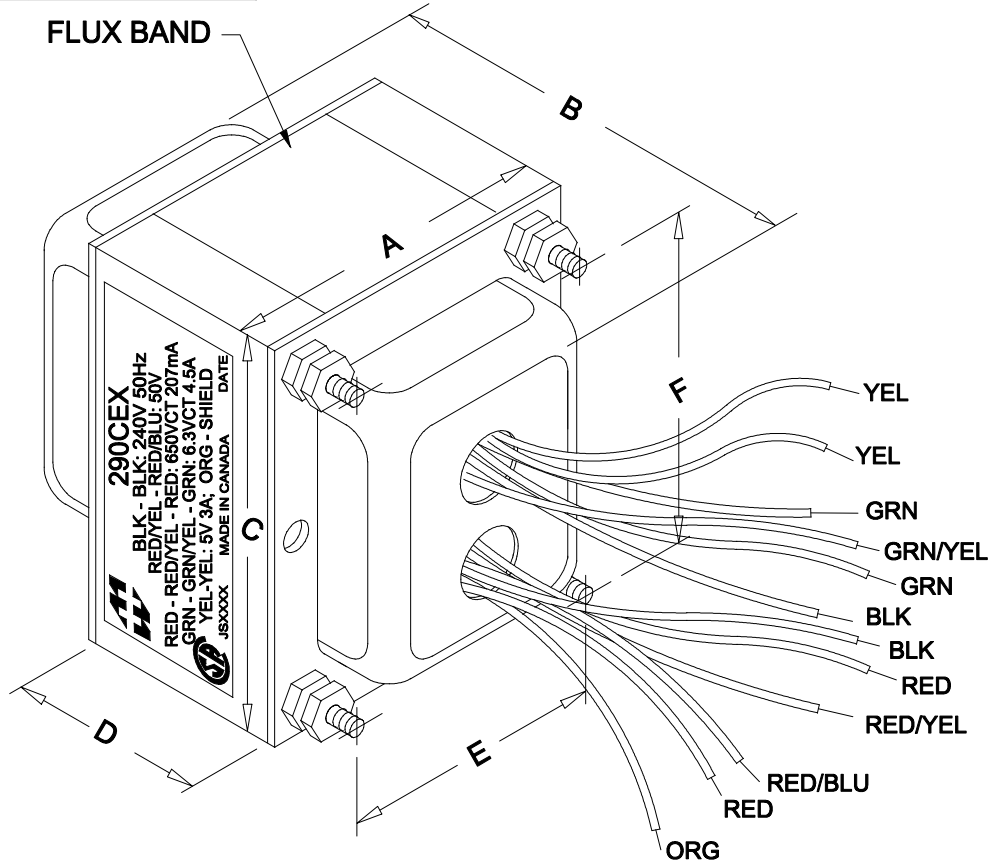

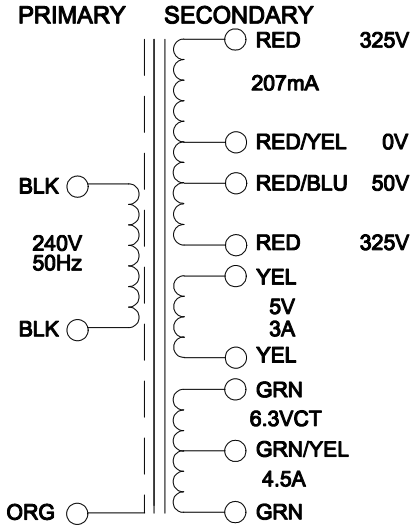

NOTE 1: ALL LEADS 14" MIN. OUT. STRIP 0.5"
NOTE 2: UNIT COMES WITH FOUR EXTRA #8-32 NUTS FOR CHASSIS MOUNT.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 240V, 50Hz, BLK - BLK	250mA	Max.
Sec. N.L.V	@ 240V, 50Hz, BLK - BLK		
	RED - RED/YEL = RED/YEL - RED =	357.1V	±2%
	RED/YEL - RED/BLU =	53.01V	±2%
	RED - RED =	714.2V	±2%
	YEL - YEL =	5.301V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.373V	±2%
	GRN - GRN =	6.747V	±2%
DCR	@ 20°C, BLK - BLK =	6.171 Ω	±20%
	@ 20°C, RED - RED =	84.07 Ω	±20%
	@ 20°C, YEL - YEL =	0.042 Ω	±20%
	@ 20°C, GRN - GRN =	0.034 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION		DATE
0	RELEASED.	C.I.	06/14/17
1	ADDED NOTE 2.	C.I.	06/19/17
2	6.3VCT CURRENT WINDING WAS 4A	C.I.	06/14/19

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290CEX
DATE: 06/14/17	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		