High tensile strength
For high mechanical stress
Enhanced sealing
Easy to disassemble
45° elbow enables best assembling



Mechanical resistance

Robust

Application range

In combination with protective conduit:
SILVYN® HTDL/EF/OR/HCX/HFX/FG
HIPROJACKET
Mechanical engineering
Railway applications

Product Make-up

PG/NPT connection thread
Hexagonal collar
Threaded sleeve
Cap nut

Remark

* Trade product, no Lapp productPhotographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Material:	Gland body: cast steel with corrosion-resistance, galvanised and chrome-plated surface. Sealing ring: PA Inner sleeve: steel
Protection rating:	IP 67
Temperature range:	-45°C to +105°C

PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.


Part number	Article designation	Typ T & B	min. internal Ø	Internal Ø	SW (mm)	Suitable for SILVYN® HTDL/EF/OR/HCX/HFX	Pieces / PU
SILVYN® FDG							
52004329	9	7360	10.0	10.0	23	5/16"	1.0
52004330	11	7361	11.0	11.0	24	3/8"	1.0
52004360	13,5	7362	11.0	11.0	24	3/8"	1.0
52004390	16	7363	14,5	14.5	30	1/2"	1.0
52004420	21	7364	20.0	20.0	36	3/4"	1.0
52004450	29	7365	25.0	25.0	46	1."	1.0
52004480	36	7366	33,5	33.5	55	1 1/4"	1.0
52004510	42	7367	38,5	38.5	60	1 1/2"	1.0
52004540	48	7368	49,5	49.5	80	2."	1.0
SILVYN® FDG NPT thread							
52021580	1/2"	5331	11.0	11.0	26	3/8"	1.0
52021560	1/2"	5332	14,5	14.5	32	1/2"	1.0
52021570	3/4"	5333	20.0	20.0	41	3/4"	1.0
52021590	1."	5334	25.0	25.0	46	1."	1.0
52021600	1 1/4"	5335	33,5	33.5	55	1 1/4"	1.0
52021610	1 1/2"	5336	38,5	38.5	65	1 1/2"	1.0
52021611	2."	5337	49,5	49.5	80	2."	1.0
SILVYN® FDHW 45° angled							
52004560	11	7341	11.0	11.0	26	3/8"	1.0
52004590	13,5	7342	11.0	11.0	26	3/8"	1.0
52004620	16	7343	14,5	14.5	32	1/2"	1.0
52004650	21	7344	20.0	20.0	36	3/4"	1.0
52004680	29	7345	25.0	25.0	46	1."	1.0
52004710	36	7346	33,5	33.5	55	1 1/4"	1.0
52004770	48	7348	49,5	49.5	75	2."	1.0
SILVYN® FDHW 45° NPT thread							
52023290	1/2"	5341	11.0	11.0	28	3/8"	1.0
52021620	1/2"	5342	14,5	14.5	30	1/2"	1.0
52021630	3/4"	5343	20.0	20.0	41	3/4"	1.0
52021640	1."	5344	25.0	25.0	46	1."	1.0
52021650	1 1/4"	5345	33,5	33.5	55	1 1/4"	1.0
52021660	1 1/2"	5346	38,5	38.5	56	1 1/2"	1.0
52021661	2."	5347	49,5	49.5	75	2."	1.0

PN 0486/01_03.10

©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.

Part number	Article designation	Typ T & B	min. internal Ø	Internal Ø	SW (mm)	Suitable for SILVYN® HTDL/EF/OR/HCX/HFX	Pieces / PU
SILVYN® FDW 90° angled							
52004790	11	7351	12.0	12.0	25	3/8"	1.0
52004820	13,5	7352	14,5	14.5	25	3/8"	1.0
52004850	16	7353	14,5	14.5	30	1/2"	1.0
52004880	21	7354	20.0	20.0	36	3/4"	1.0
52004910	29	7355	25.0	25.0	46	1."	1.0
52004940	36	7356	33.0	33.0	55	1 1/4"	1.0
52004970	42	7357	39.0	39.0	60	1 1/2"	1.0
52005000	48	7358	50.0	50.0	75	2."	1.0
SILVYN® FDW 90° NPT thread							
52021670	1/2"	5351	11.0	11.0	28	3/8"	1.0
52021680	1/2"	5352	14,5	14.5	32	1/2□	1.0
52023440	3/4"	5353	20.0	20.0	36	3/4"	1.0
52021690	1."	5354	25.0	25.0	46	1"	1.0
52023830	1 1/4"	55	33,5	33.5	55	1 1/4"	1.0
52021710	1 1/2"	5356	38,5	38.5	60	1 1/2"	1.0
52021711	2."	5357	49,5	49.5	75	2"	1.0

PN 0486/01_03.10
©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.

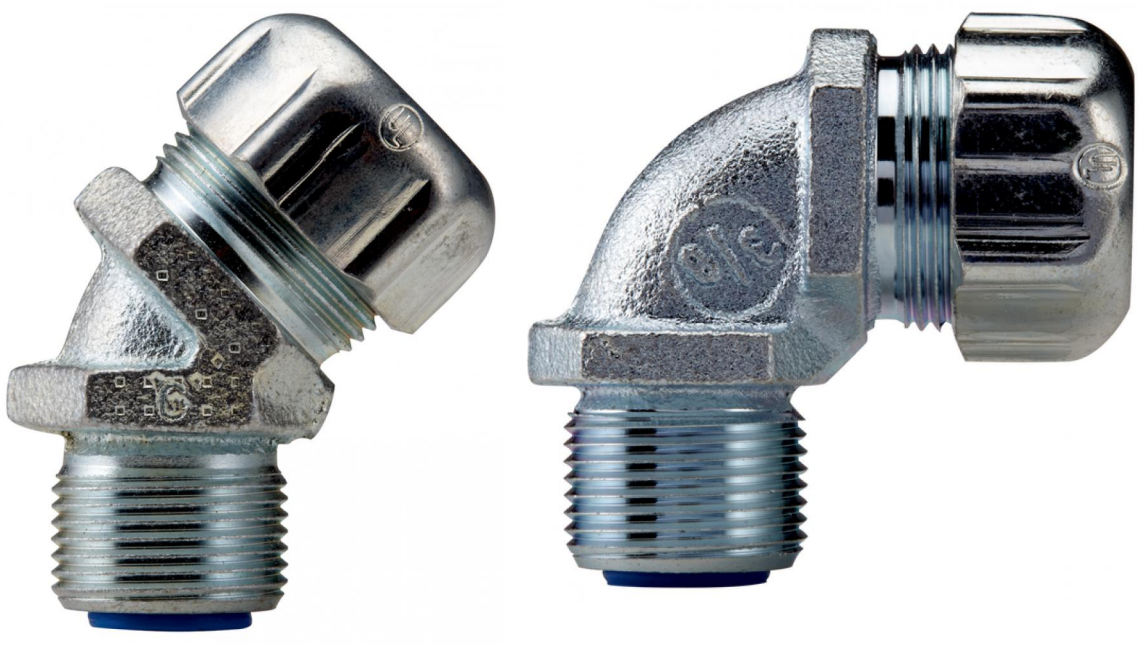

PN 0486/01_03.10 ©2012 Lapp Group - Technical changes reserved
Photographs are not to scale and do not represent detailed images of the respective products.