HC-M-04-CT-M - Contact insert module

1414362

https://www.phoenixcontact.com/sk/products/1414362

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 4, power contacts: 4, control contacts: 0, Pin, Crimp connection, 690 V, 40 A, 1.5 mm^2 ... 6 mm^2, application: Power

Commercial data

Item number	1414362
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF7
Product key	BF7ACE
Catalog page	Page 575 (C-2-2019)
GTIN	4055626025056
Weight per piece (including packing)	11.94 g
Weight per piece (excluding packing)	11.7 g
Customs tariff number	85389099
Country of origin	PL

Technical data

Notes

General	For HEAVYCON HC-B6 to B48 housing, HC-M-B...-MF-... module carrier frame required, crimp connection, crimp contacts not supplied as standard.
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly instructions	To ensure correct use, installation in housing with IP54 protection or better is required
	The module cannot be used simultaneously with the HC-B..-TMB-SD-IP65 and HC-B..-TMS-SD-IP65 protective covers.

Product properties

Product type	Modular contact insert
Number of positions	4
Connection profile	4
Contact numbering	1 - 4
Application	Power
Number of module slots	1
No. of power contacts	4
No. of control contacts	0
Contact material type	turned
Series	HC-M-04

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	Crimp connection
Connection in acc. with standard	IEC / EN

Conductor connection

Conductor cross section	1.5 mm² ... 6 mm²
Connection cross section AWG	16 ... 10
Stripping length of the individual wire	9 mm (9.6 mm (4-6 mm²))
	14 mm (4 ... 6 mm²)

Dimensions

Dimensional drawing	
Width	34.2 mm
Height	44.6 mm
Length	14.6 mm

Mechanical characteristics

Minimum housing height	52 mm
Contact diameter	4 mm

Electrical properties

Rated voltage (III/2) contacts	1000 V
Rated voltage (III/3)	690 V
Rated surge voltage (III/2)	8 kV
Rated surge voltage (III/3)	6 kV
Rated surge voltage	6 kV
Rated current	40 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

Drawings

Schematic diagram

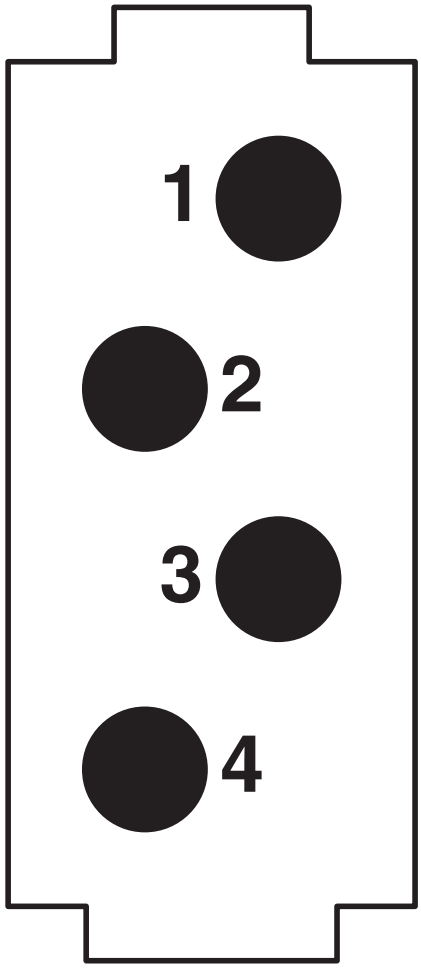

Connector pin assignment, connection side

Diagram

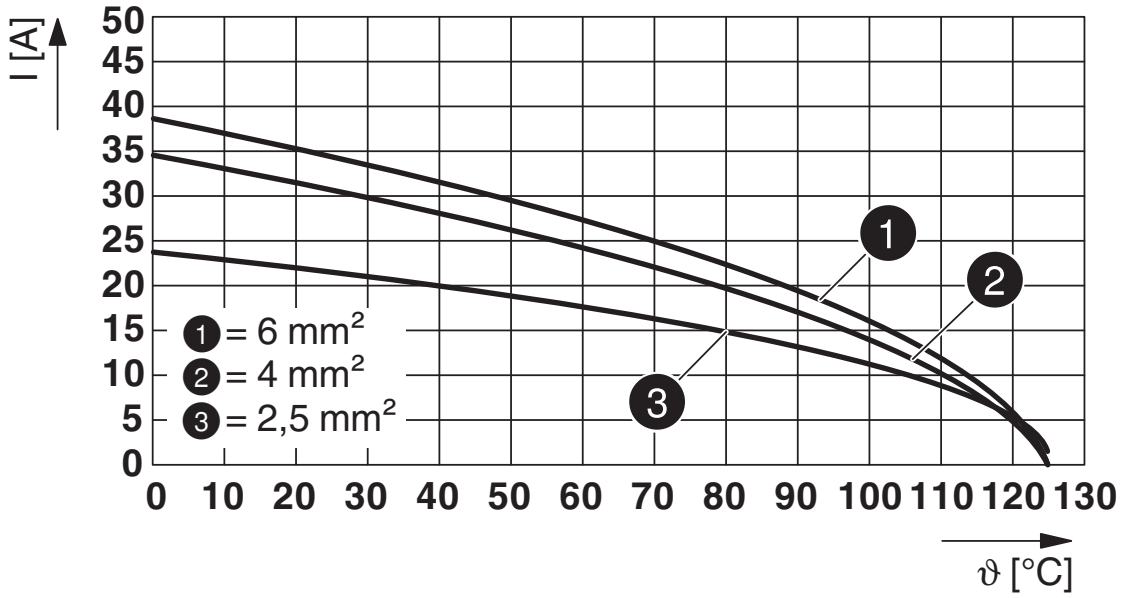

Derating diagram

Dimensional drawing

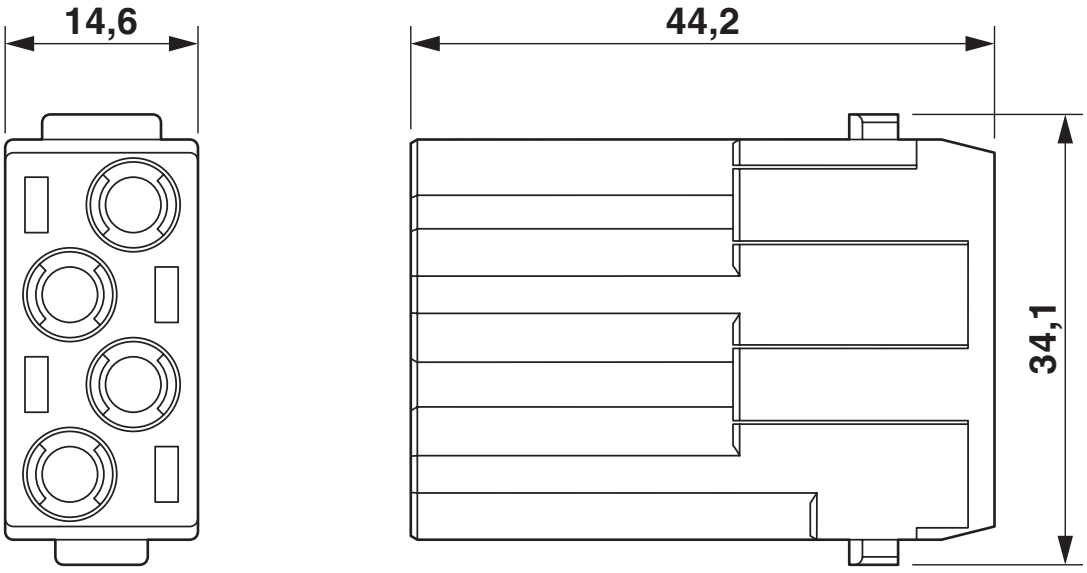

Male insert

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/sk/products/1414362

DNV
Approval ID: TAE000037S

CSA
Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	830 V	30 A	- 10	-

UL Recognized
Approval ID: E118976

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	37 A	- 10	-

EAC
Approval ID: RU C-DE.BL08.B.00511

UL Recognized
Approval ID: E468743

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	37 A	-	-

Classifications

ECLASS

ECLASS-11.0	27440217
ECLASS-12.0	27440217
ECLASS-13.0	27440217

ETIM

ETIM 9.0	EC000438

UNSPSC

UNSPSC 21.0	39121400

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Accessories

HC-CBU-MOD - Coding element

1636130

https://www.phoenixcontact.com/sk/products/1636130



Coding socket for coding up to 16 connectors, for HC Modular

HC-CST-MOD - Coding element

1636127

https://www.phoenixcontact.com/sk/products/1636127



Coding peg for coding up to 16 connectors, for HC Modular

HC-M-MHR-PE16 - Cable lug

1636981

https://www.phoenixcontact.com/sk/products/1636981



Cable lug for HEAVYCON-MODULAR; PE connection extension to 16 mm^2, for crimping with crimp pliers

CK4,0-ED-1,50ST AG - Crimp contact

1663239

https://www.phoenixcontact.com/sk/products/1663239



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1.5 mm^2 ... 1.5 mm^2, AWG 16

CK4,0-ED-2,50ST AG - Crimp contact

1663242

https://www.phoenixcontact.com/sk/products/1663242



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 2.5 mm^2 ... 2.5 mm^2, AWG 14

CK4,0-ED-4,00ST AG - Crimp contact

1663255

https://www.phoenixcontact.com/sk/products/1663255



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 4 mm^2 ... 4 mm^2, AWG 12

CK4,0-ED-6,00ST AG - Crimp contact

1663268

https://www.phoenixcontact.com/sk/products/1663268



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 6 mm^2 ... 6 mm^2, AWG 10

CK4,0-ED-10,00ST AG - Crimp contact

1586198

https://www.phoenixcontact.com/sk/products/1586198



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 10 mm^2 ... 10 mm^2, AWG 8

CK4,0-ED-1,50M AG - Crimp contact

1274097

https://www.phoenixcontact.com/sk/products/1274097



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 1.5 mm^2 ... 1.5 mm^2, AWG 16

CK4,0-ED-2,50M AG - Crimp contact

1274094

https://www.phoenixcontact.com/sk/products/1274094



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 2.5 mm^2 ... 2.5 mm^2, AWG 14

CK4,0-ED-4,00M AG - Crimp contact

1274093

https://www.phoenixcontact.com/sk/products/1274093



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 4 mm^2 ... 4 mm^2, AWG 12

CK4,0-ED-6,00M AG - Crimp contact

1274092

https://www.phoenixcontact.com/sk/products/1274092



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 6 mm^2 ... 6 mm^2, AWG 10

CK4,0-ED-10,00M AG - Crimp contact

1274091

https://www.phoenixcontact.com/sk/products/1274091



Crimp contact, contact diameter: 4 mm, turned, Pin, contact material: Copper alloy, lead-free, contact surface: silver-plated, connection cross section: 10 mm^2 ... 10 mm^2, AWG 8

HC-M-B06-MFH-B - Module carrier frame

1182085

https://www.phoenixcontact.com/sk/products/1182085



Module carrier frame, size: B6, type : for the panel mounting side (a, b, c, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B10-MFH-B - Module carrier frame

1182088

https://www.phoenixcontact.com/sk/products/1182088



Module carrier frame, size: B10, type : for the panel mounting side (a, b, c, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B16-MFH-B - Module carrier frame

1182090

https://www.phoenixcontact.com/sk/products/1182090



Module carrier frame, size: B16, type : for the panel mounting side (a, b, c, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B24-MFH-B - Module carrier frame

1182094

https://www.phoenixcontact.com/sk/products/1182094



Module carrier frame, size: B24, type : for the panel mounting side (a, b, c, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B06-MFH-H - Module carrier frame

1182087

https://www.phoenixcontact.com/sk/products/1182087



Module carrier frame, size: B6, type : for the sleeve side (A, B, C, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B10-MFH-H - Module carrier frame

1182089

https://www.phoenixcontact.com/sk/products/1182089



Module carrier frame, size: B10, type : for the sleeve side (A, B, C, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-B16-MFH-H - Module carrier frame

1182093

https://www.phoenixcontact.com/sk/products/1182093



Module carrier frame, size: B16, type : for the sleeve side (A, B, C, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-04-CT-M - Contact insert module

1414362

https://www.phoenixcontact.com/sk/products/1414362

HC-M-B24-MFH-H - Module carrier frame

1182095

https://www.phoenixcontact.com/sk/products/1182095



Module carrier frame, size: B24, type : for the sleeve side (A, B, C, ...), 4 mm^2 ... 6 mm^2, application: Module carrier frame

HC-M-04-CT-F - Contact insert module

1414363

https://www.phoenixcontact.com/sk/products/1414363



Contact insert module, number of positions: 4, power contacts: 4, control contacts: 0, Socket, Crimp connection, 690 V, 40 A, 1.5 mm^2 ... 6 mm^2, application: Power

HC-M-04-CT-M - Contact insert module

1414362

https://www.phoenixcontact.com/sk/products/1414362

UNIFOX RT-CK 4.0 - Contact removal tool

1072064

https://www.phoenixcontact.com/sk/products/1072064



Contact removal tool, for rotated CK-4,0-... contacts

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

PHOENIX CONTACT s.r.o.
Námestie Mateja Korvína 1
811 07 Bratislava
+421 2 3210 1470
obchod.sk@phoenixcontact.com