


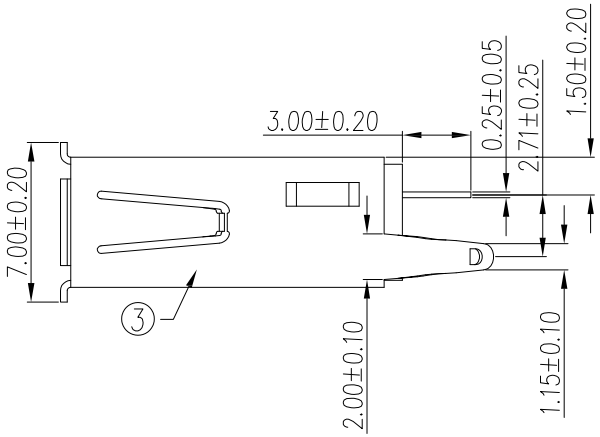


Note:


1. Rated voltage and current: 1.5A at 250V AC minimum.
2. Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
3. Contact resistance: Before life test 30m ohm max, After life tset 50m ohm max.
4. Insulation resistance: 1000M ohm min.
5. Insertion force: 35 Newtons maximum.
6. Extraction force: 10 Newtons minimum.
7. Solderability:Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 245±5°C.

984-1 1- 6 04 1 1 7
1 2 3 4 5


1. 6: Female(GP)
2. No. of contacts per port
3. 1: Flat 180°
4. 1: Selective; White insulator
5. Pinrex internal code.

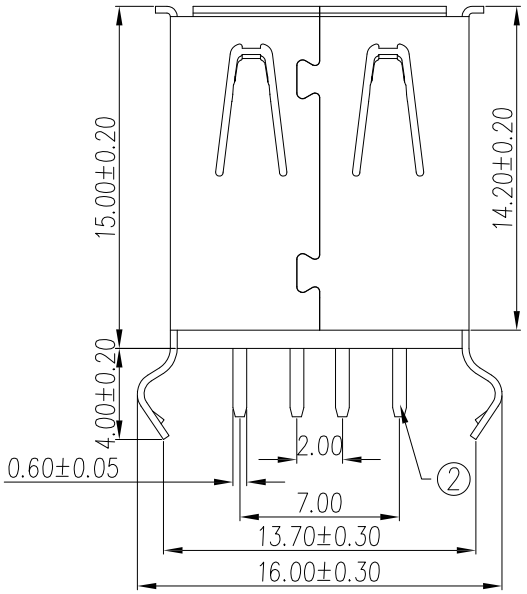

文管中心
2024.03.28
发行章

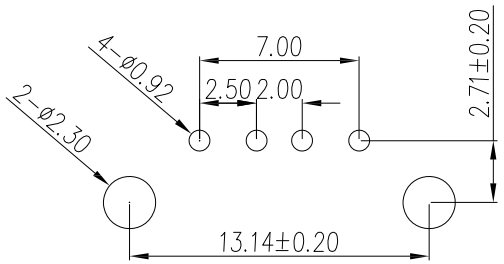

P.C.B LAYOUT
****



No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Brass	T=0.30mm	80~120u"Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area: 80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	P.B.T	UL 94-V0	White

REV.	DESCRIPTION	DATE
C	更新圖面	2024/03/28
B	更新圖面	2021/12/28
A	RELEASE	2009/05/05

TOLERANCE
.0 =±.30
.00 =±.20
.000 =±.10
.0000=±.
ANG.=±1°

UNITS : mm
SCALE NONE
SIZE A4
SHEET 1 OF 1
REV. C

OLD PART NO.
DRAWER 罗苗苗
CHECK 李剑
APP'D 李剑

TITLE
USB-A(F) 180° DIP

NEW PART NO.
984-11-604117

頻銳科技股份有限公司
PINREX TECHNOLOGY CORP.

DRAW NO.
984-11-604117(C版)