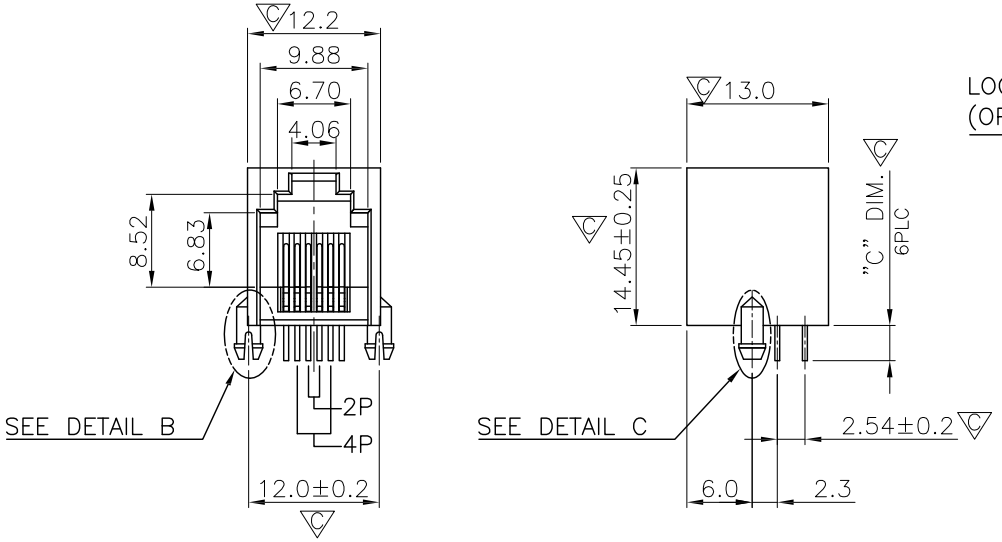

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART

1. MATERIAL:
   HOUSING: PBT OR PA46 OR PA9T, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
   CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
   CONTACTS: GOLD PLATED ON ENTIRE CONTACT, 1.27μm [50μ"] MIN. NICKEL UNDERPLATED ALL OVER.
3. "▽C" SHOWS QIP INSPECTION POINT.

996-A 2-B2 64 32
1 2 3 4

1. 1: Jack
   A: Jack (Green Product)
2. 2: Tray
3. 64: 6P4C
4. Pinrex internal code.
   Gold flash
   Gray Insulator

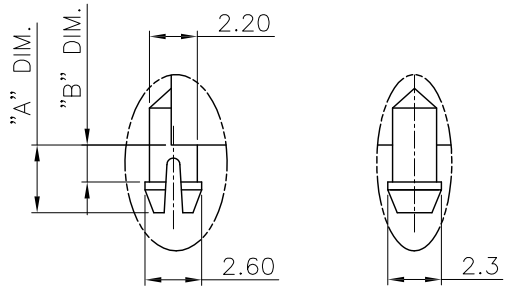

DETAIL B
(SCALE 2:1)

DETAIL C
(SCALE 2:1)

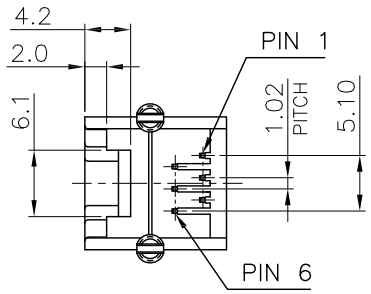

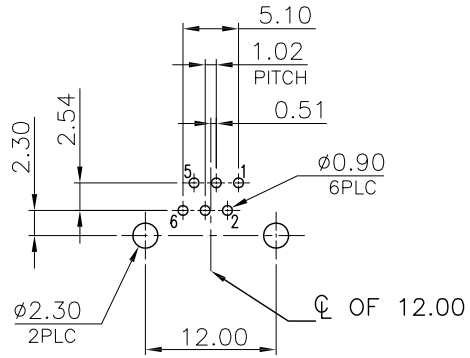

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

文管中心
2019.09.20
發行章

			TOLERANCE	UNITS : mm	OLD PART NO.			TITLE	頻銳科技股份有限公司
			.0 =±.25		DRAWER 袁丽娜	CHECK 李劍		6POSITION, MINI LOW PROFILE, SIDE ENTRY PCB JACK	PINREX TECHNOLOGY CORP.
			.00 =±.13						
			.000 =±.05						
			.0000=±.						
A	RELEASE	2019/09/20	ANG.=±3°	SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. A	APP'D 李劍	NEW PART NO. 996-A2-B26432	DRAW NO. 996-A2-B26432
REV.	DESCRIPTION	DATE							