
REV	DESCRIPTION	AUTHOR	DATE
X1	Release	Toby	2025.04.18

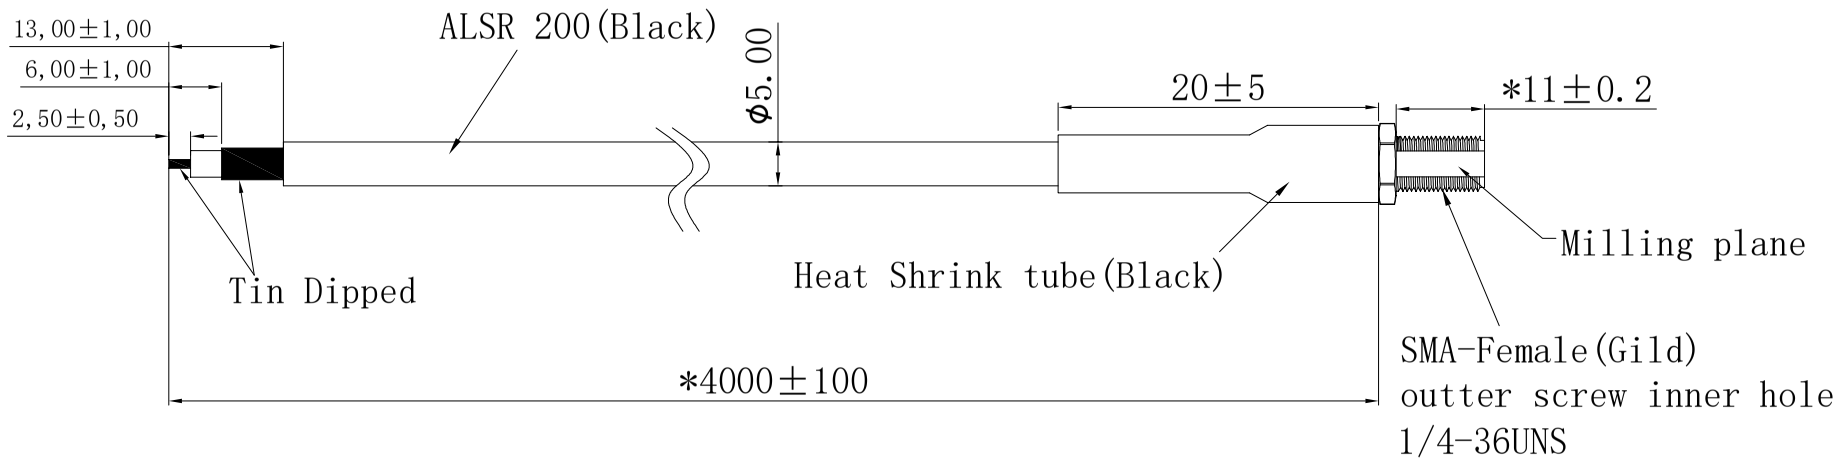

NOTES:
1. "*" is the key dimension;
2. Connector:SMA Female,Cable:ALSR 200 Black;
3. Impedance:50 ohm; Frequency:DC~6GHz;
4. Connector salt spray test:48H;
5. Operating temperature: -40~+85℃;
6. SMA Female pull test:≥100N;
7. Cables assembly to be 100% tested for continuity(Shorts and opens);
8. Appearance: Refer to cosmetics standard from Quectel Quality department;
9. Package: Refer to package standard;
10. Compliant with ROHS2.0 and REACH。

QUECTEL® Build a Smarter World
上海移远通信技术股份有限公司

Part Name: Y1SFB0HA0AA_CABLE_R1

Tolerance									
0-10	±0.05	DRAWN	Toby	Part No:				REV
10-30	±0.10	CHKD	Kenny					X1
30-80	±0.15	APPD	Kevin	Third	Unit	Size	Scale	Sheet
≥ 80	±0.20							
Angle	±1°	DATE	2025.04.18		mm	A4	1:1	1 of 1