DC Connector, Socket, 7.0 mm, 1.45 mm, 2-pole, solder terminal



Description

- Solder terminal:
  Screw-on mounting, from rear-side
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole, straight

Weblinks

pdf-datasheet, html-datasheet, General Product Information, RoHS, CHINA-RoHS, REACH, Mating Connectors, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check

Technical Data

Diameter	7.0 mm / 4.0 mm / 1.45 mm
Number of Poles	2-pole
Ratings DC	2 A / 18 VDC
Dielectric Strength	500 VDC
Insulation Resistance	> 100 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal silver plated
Mounting	Screw-on mounting wall thickness max. 3.0 mm
Style	straight
Lifetime	5000 Insertions

Dimensions

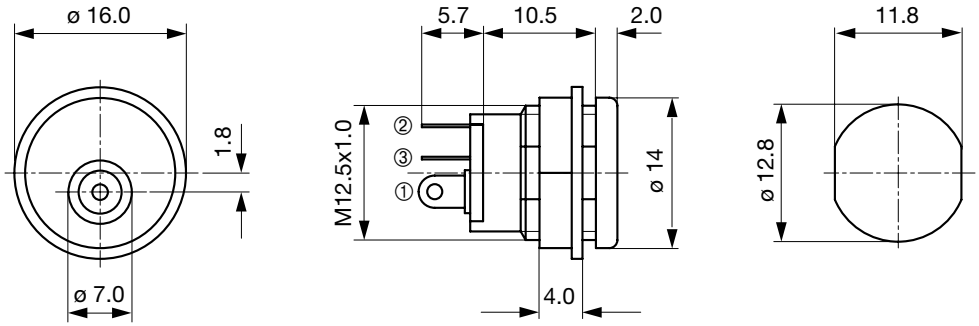

Diagrams



All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
DC Plug/Socket	7.0	2-pole	solder terminal	4840.2230

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 250 Pcs

Mating Inlets/Plugs



Category / Description	
DC Plug/Socket Overview complete	
4840, solder terminal, , Plug, 6.5 mm, 2-pole, DC Plug/Socket	4840.1230
4840, Cable, , Plug, 6.5 mm, 2-pole, DC Plug/Socket	4840.5230
4840, Cable, , Plug, 6.5 mm, 2-pole, DC Plug/Socket	4840.5231
DC Plug/Socket further types to 4840 DC-Stecker, verschiedene	

02.09.2014

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.