
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	S	REVISED PER ECO–17–014522	26APR2018	AP	DG

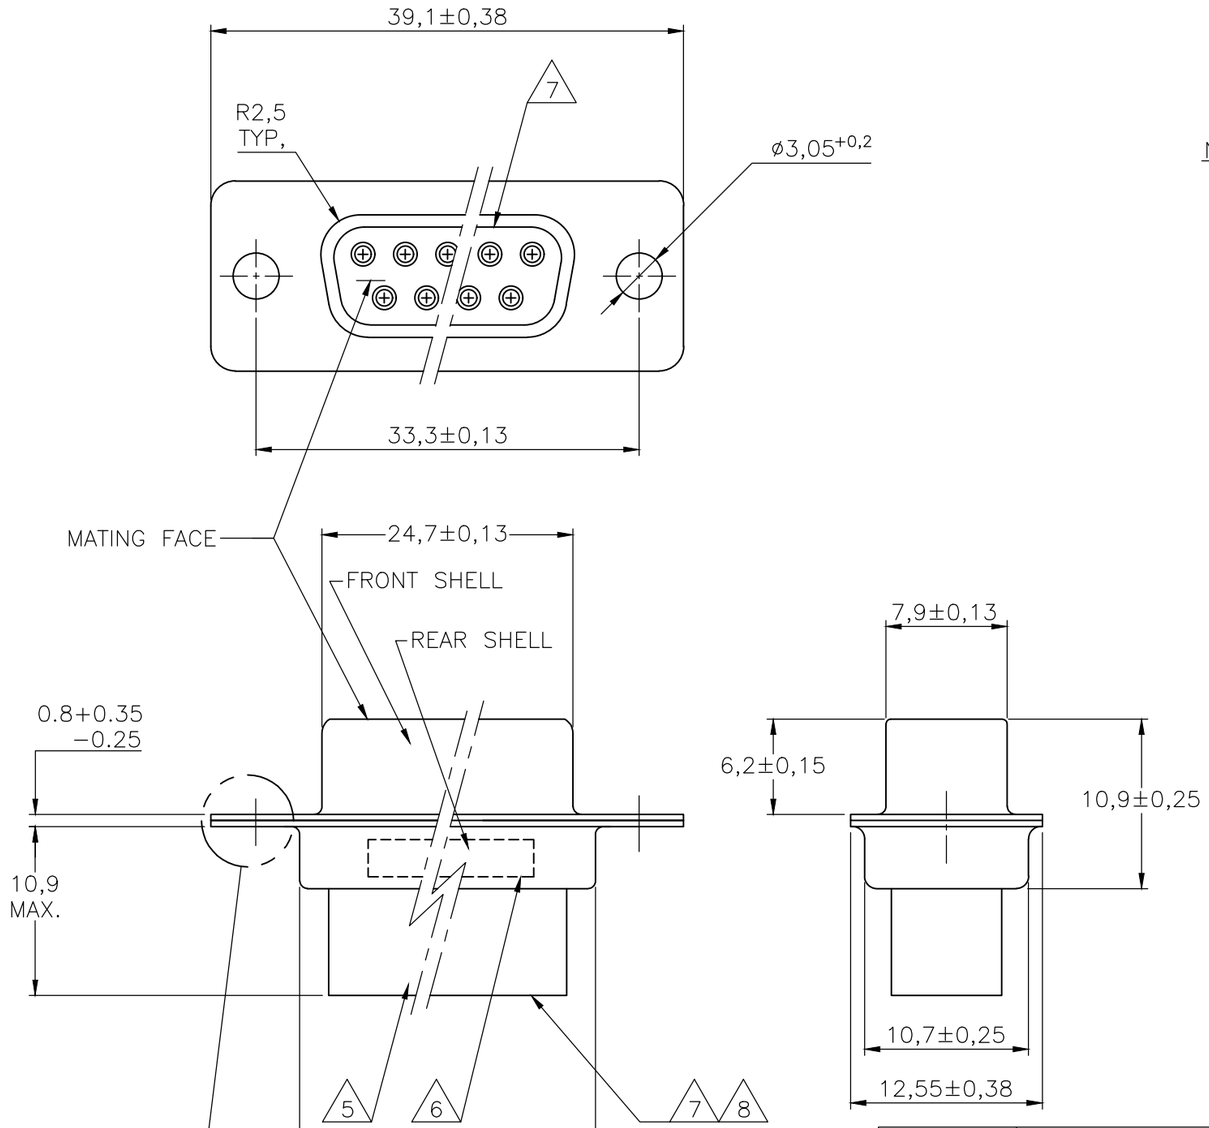

NOTES:

1. THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
2. MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
3. RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
4. FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
   - 32–28AWG/28–24AWG CONTACTS
     - 91067–3 INSERTION/REMOVAL
     - 726363–1 INSERTION ONLY
   - 24–20AWG CONTACTS
     - 726363–1 INSERTION ONLY
     - 726364–1 REMOVAL ONLY
5. INSERTS: GLASSFILLED SELF–EXTINGGUISHING PBT, COLOR BLACK.
6. TE, PARTNUMBER AND DATE CODE; INK STAMPED.
7. RAISED CAVITY IDENTIFICATION 0,8 HIGH.
8. RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164532–9.

OBSOLETE	BRIGHT TIN	BRIGHT TIN	STEEL	164532–9 (8)
	BRIGHT TIN	BRIGHT TIN	STEEL	164532–4
	PLATING FRONT SHELL	PLATING REAR SHELL	MATERIAL SHELLS	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0,2
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± 2°

MATERIAL –

FINISH –

DWN D.KESSLER 11FEB99
CHK W.SOOMERS –
APVD W.SOOMERS –
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT

TE Connectivity

NAME
15 POS HDP–20 RECEPTACLE
CONNECTOR SIZE 2
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	–	C–164532	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV S