

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
DW	—


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B4	REVISED (ECR-15-011639)	21AUG15	J.Z	J.L

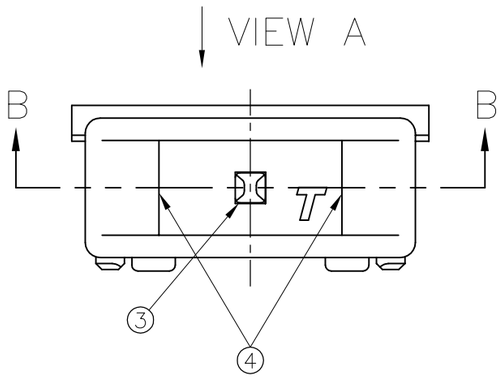

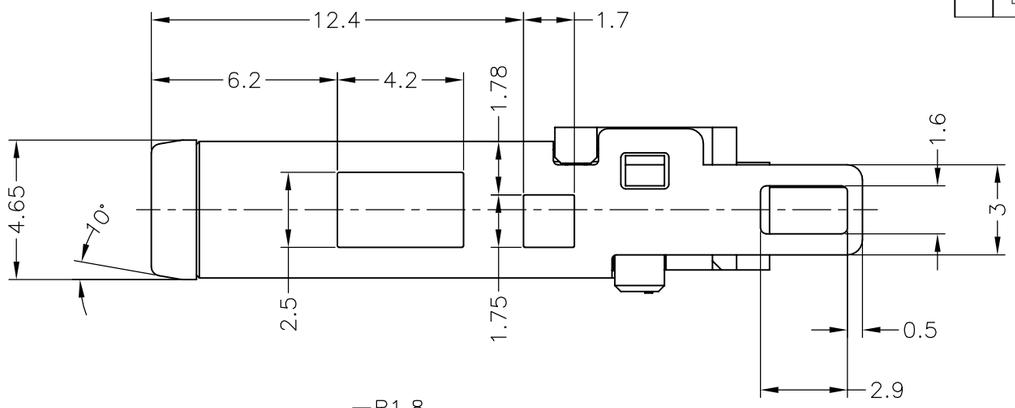

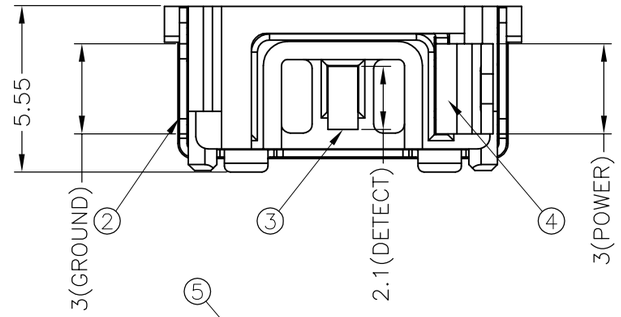




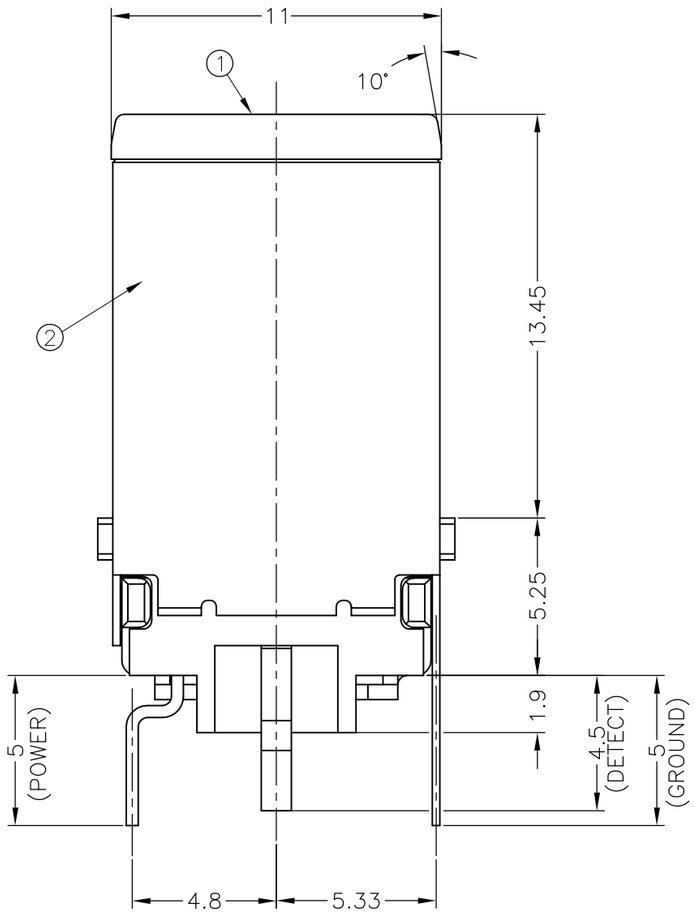

B–B

A'SSY P/N					
1-2129334-2	1-2129334-1	2129334-1	NATURAL	THERMOPLASTIC (UL94V-0)	REAR HOUSING ⑤
1	1	1	0.0002mm GOLD PLATING ON CONTACT AREA, 0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	POWER CONTACT ④
1	1	1	0.0002mm GOLD PLATING ON CONTACT AREA, 0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	DETECT CONTACT ③
1	1	1	0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	GROUND CONTACT ②
1	–		BLACK	THERMOPLASTIC (UL94V-0)	HOUSING ①
–	1	1	YELLOW	THERMOPLASTIC (UL94V-0)	
	Q'TY		FINISH/COLOR	MATERIAL	PART NAME NO

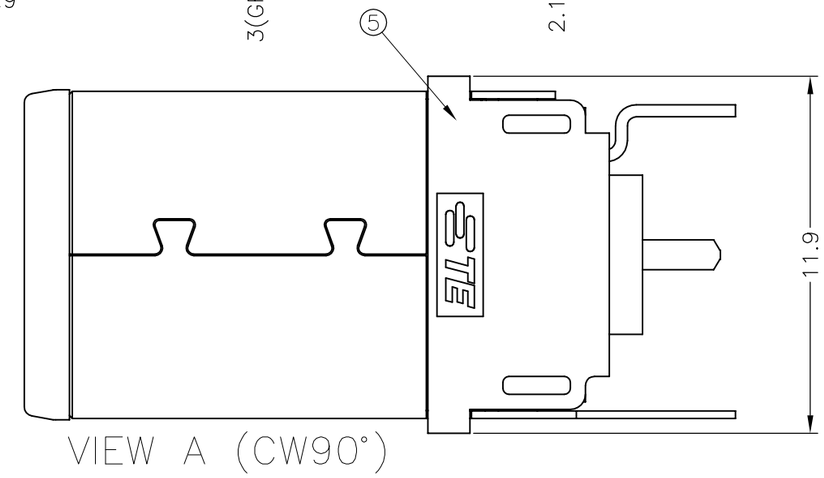

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±–
1 PLC ±–
2 PLC ±–
3 PLC ±–
4 PLC ±–
ANGLES ±–
±0.25
±3°

MATERIAL: SEE TABLE

FINISH: –

DWN	S.HUANG	24FEB2012
CHK	V.PENG	24FEB2012
APVD	W.KODAMA	24FEB2012

PRODUCT SPEC: C

APPLICATION SPEC: –

WEIGHT: –

TE Connectivity

NAME: DC POWER PLUG CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2129334	–

CUSTOMER DRAWING

SCALE 5:1 SHEET 1 OF 2 REV B4

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,– .
COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
DW	—


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	
	–	SEE SHEET 1	–	—	—


1. INNER BOX DIMENSION: 340mmX243mmX111mm
2. SHIPPING BOX DIMENSION: 505mmX350mmX248mm
3. EU ROHS–RELATED RESTRICTED SUBSTANCE SPEC IN HOMOGENEOUS MATERIAL REFER TO TEC–138–702 REV.G:
   LEAD < 1000PPM, CADMIUM < 100PPM, MERCURY < 1000PPM
   CHROMIUM VI < 1000PPM, PBB <1000PPM, PBDE < 1000PPM
4. HALOGEN FREE SPEC:
   CHLORINE (CI): 900 ppm MAX.
   BROMINE (Br): 900 ppm MAX.
   CHLORINE (CI) + BROMINE (Br): 1500 ppm MAX.


⚠ PRODUCT SPEC:
108–99035 FOR 7A CURRENT RATING.
108–99040 FOR 10.7A CURRENT RATING.


DC POWER PLUG CONNECTOR
TE P/N: 1–2129334–1
OR 1–2129334–2

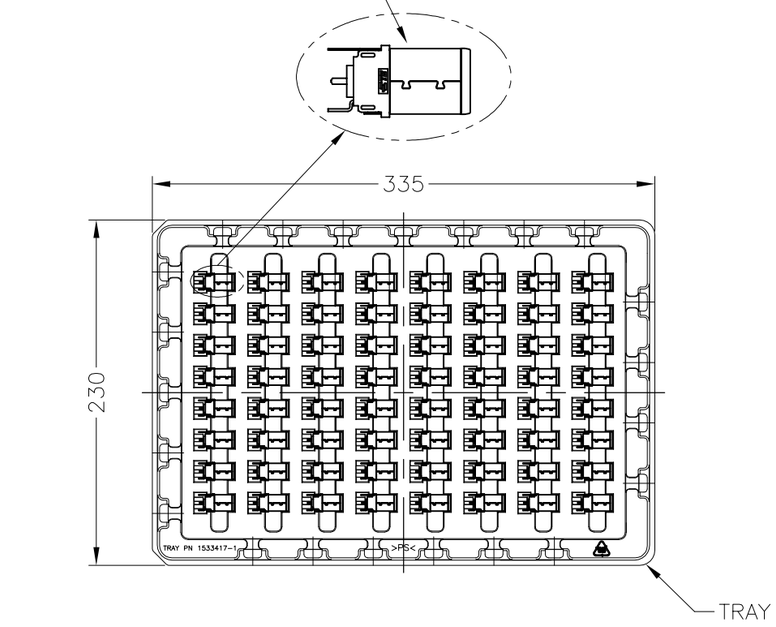


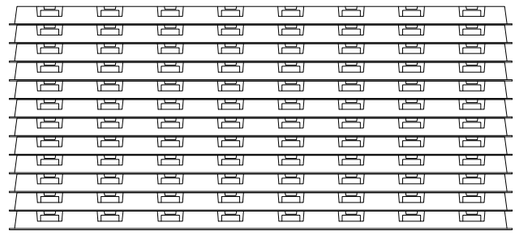

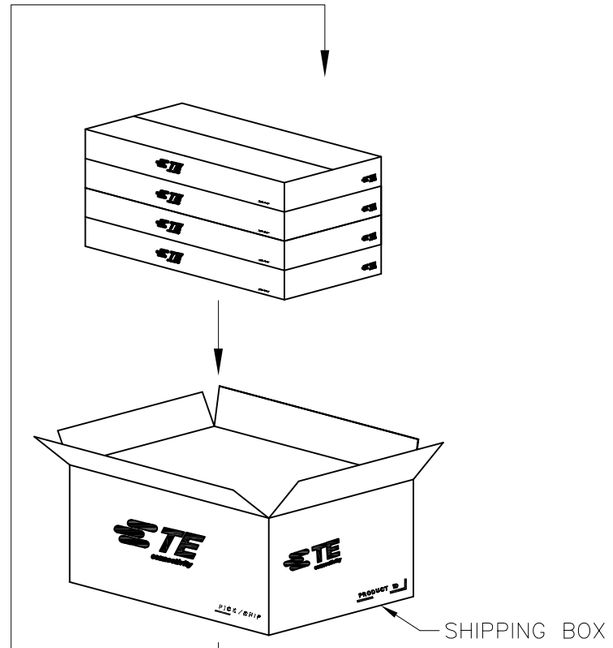

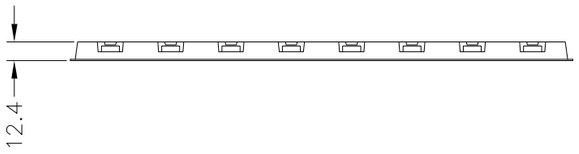



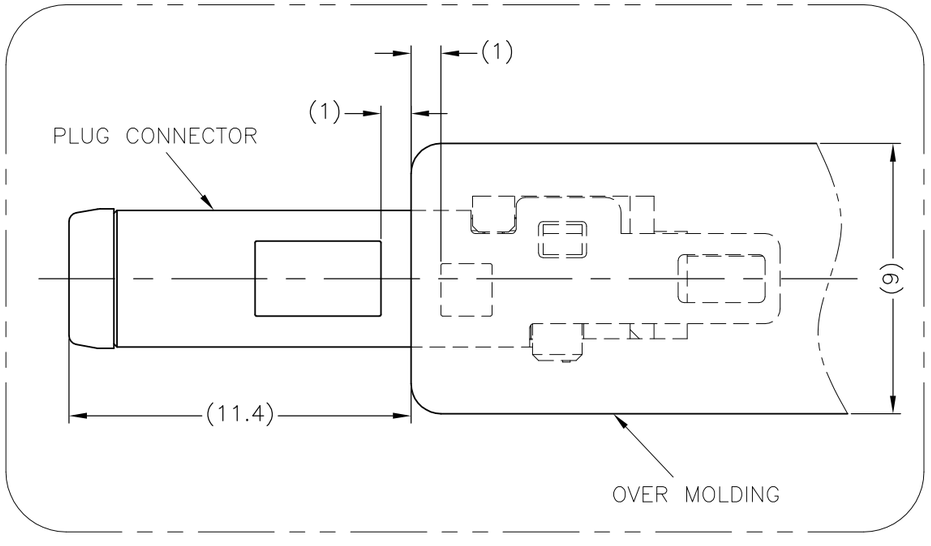

64	768	4	3072
PCS/TRAY	PCS/INNER BOX	INNER BOX/SHIPPING BOX	TOTAL Q'TY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± – ±0.25
3 PLC ± – ±3°
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN —
CHK —
APVD —
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: DC POWER PLUG CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–2129334	—

CUSTOMER DRAWING | SCALE NA | SHEET 2 OF 2 | REV B4

1470–19 (3/11)