
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,4:1 .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
DW	


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED (ECR-13-009702)	7MAY13	S.H	V.P


1. EU ROHS-RELATED RESTRICTED SUBSTANCE SPEC IN HOMOGENEOUS MATERIAL REFER TO TEC-138-702 REV.G:
   LEAD < 1000PPM, CADMIUM < 100PPM, MERCURY < 1000PPM
   CHROMIUM VI < 1000PPM, PBB <1000PPM, PBDE < 1000PPM
2. HALOGEN FREE SPEC:
   CHLORINE (CI): 900 ppm MAX.
   BROMINE (Br): 900 ppm MAX.
   CHLORINE (CI) + BROMINE (Br): 1500 ppm MAX.

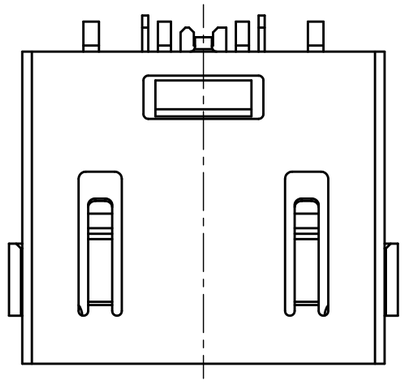


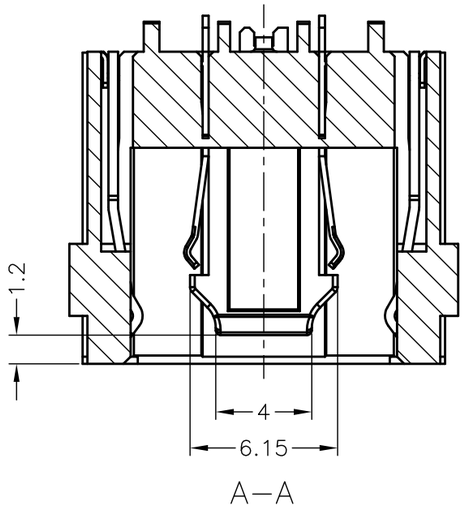

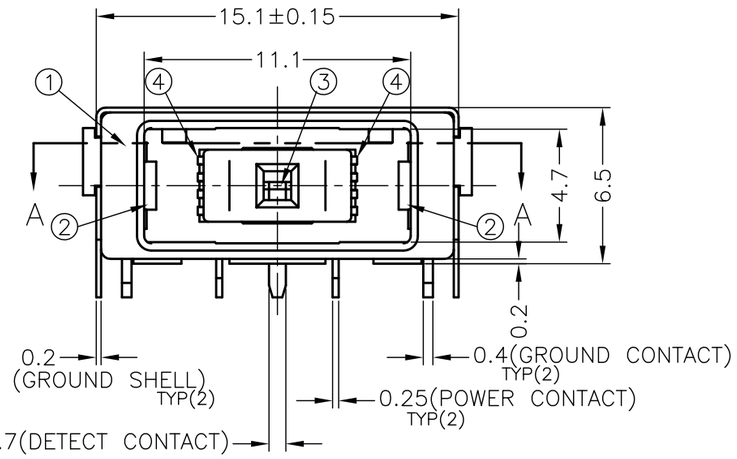

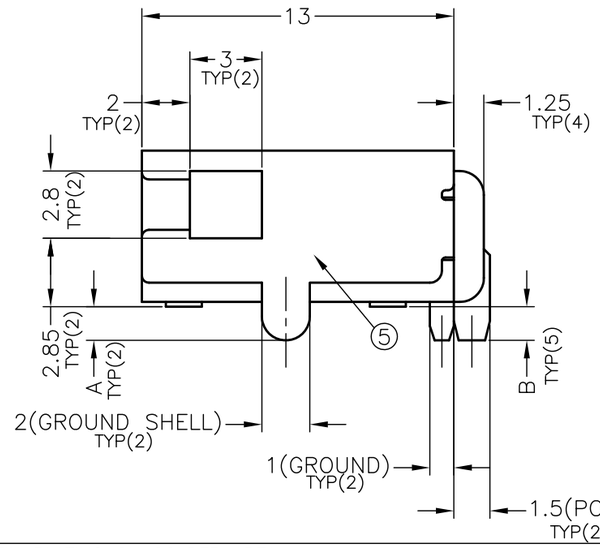

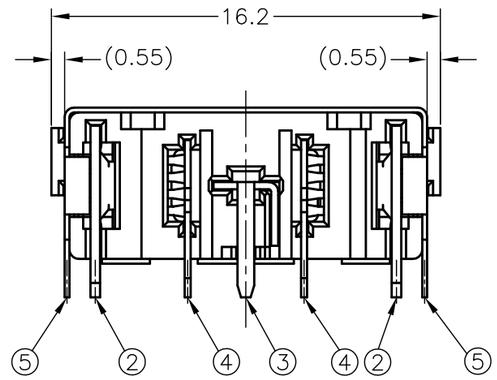

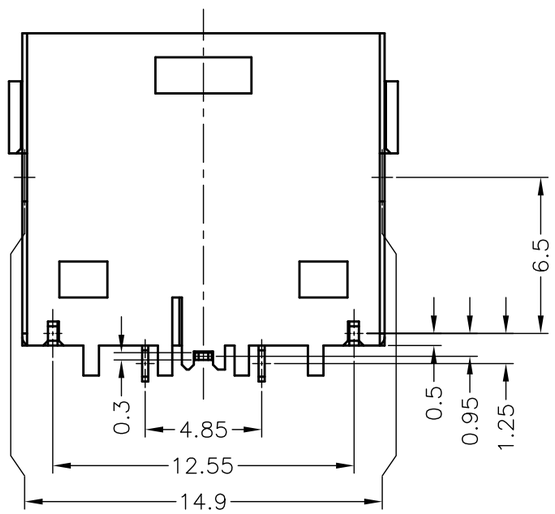

	A'SSY P/N			
	1-2129458-2	1-2129458-1	2129458-2	2129458-1
DIM B	1.2	1.4	1.2	1.4
DIM A	1.2	1.4	1.2	1.4

Q'TY				FINISH/COLOR	MATERIAL	PART NAME	NO.
1	1	1	1	0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.00127mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	GROUND SHELL	⑤
2	2	2	2	0.0002mm GOLD PLATING ON CONTACT AREA, 0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	POWER CONTACT	④
1	1	1	1	0.0002mm GOLD PLATING ON CONTACT AREA, 0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	DETECT CONTACT	③
2	2	2	2	0.0002mm GOLD PLATING ON CONTACT AREA, 0.002mm MATTE TIN PLATING ON SOLDER AREA, 0.002mm MIN. NICKEL UNDERPLATED ALL OVER	COPPER ALLOY	GROUND CONTACT	②
1	1	1	1	BLACK	HIGH TEMPERATURE THERMO-PLASTIC (UL94V-0)	HOUSING	①

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±–
1 PLC ±–
2 PLC ±–
3 PLC ±–
4 PLC ±–
ANGLES ±–
±0.25
±3°

MATERIAL: SEE TABLE

FINISH: –

DWN S.HUANG 20JUN2012
CHK V.PENG 20JUN2012
APVD W.KODAMA 20JUN2012
PRODUCT SPEC 108-99040
APPLICATION SPEC 501-99041
WEIGHT 1.94g

TE Connectivity

NAME
DC POWER JACK CONNECTOR
DIP TYPE (10.7A)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2129458	–

CUSTOMER DRAWING


SCALE	SHEET	REV
4:1	1 OF 3	B1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
DW	—


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

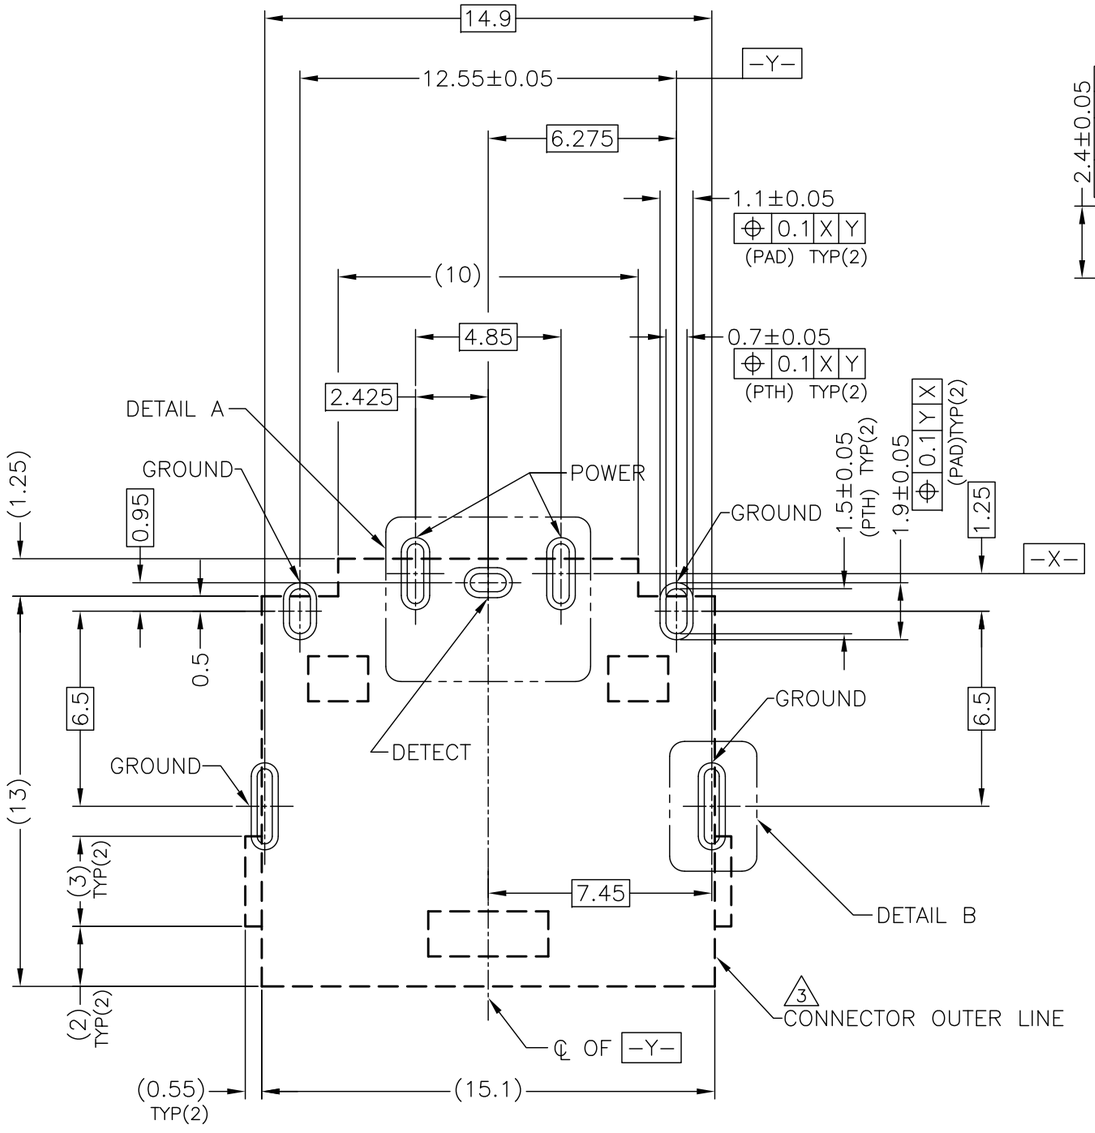


RECOMMENDED P.C.BOARD PATTERN LAYOUT (TOP VIEW)
TOLERANCE:±0.05 (THICKNESS=0.8mm)


3 [ ]: CONNECTOR OUTER LINE (NO COMPONENT AREA)

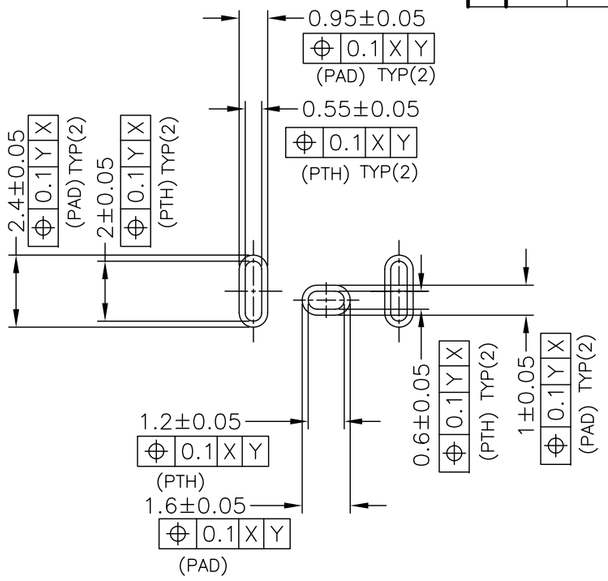

DETAIL A

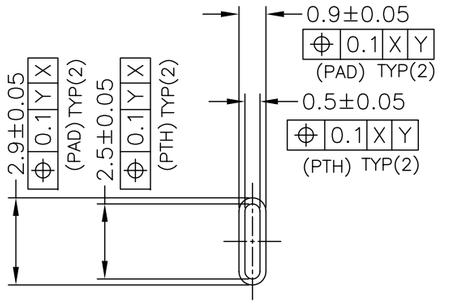

DETAIL B

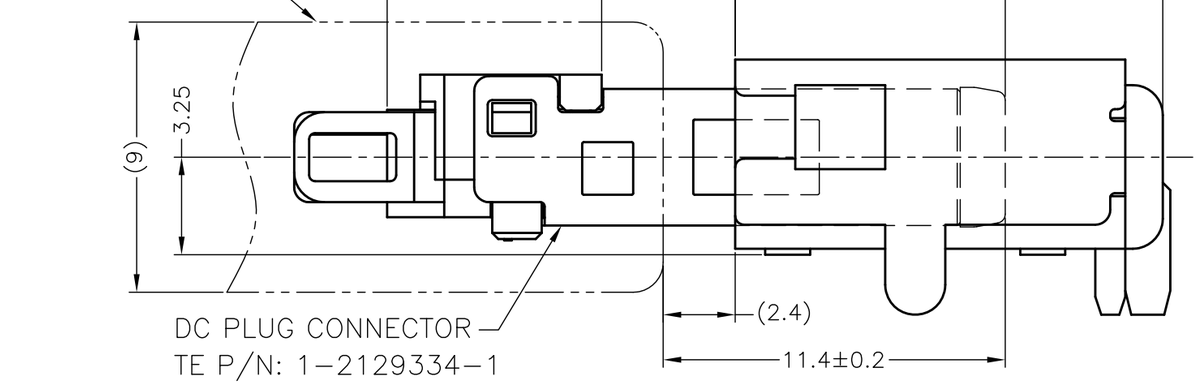

MATING CONDITION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± – ±0.25
3 PLC ± – ±3°
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN –
CHK –
APVD –
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

CUSTOMER DRAWING

TE Connectivity

NAME
DC POWER JACK CONNECTOR
DIP TYPE (10.7A)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2129458	—


SCALE	SHEET	REV
5:1	2 OF 3	B1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
DW	—


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

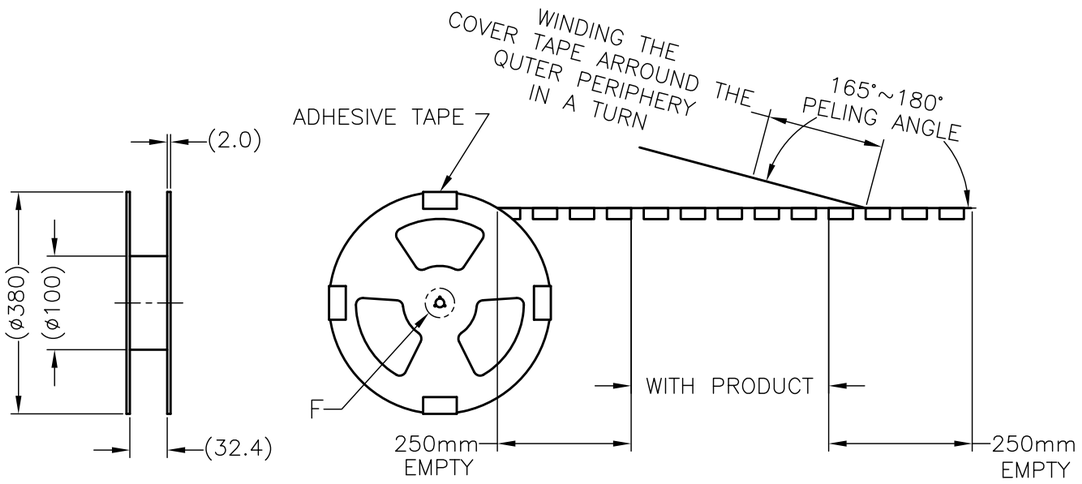


USER DIRECTION OF UNREELING

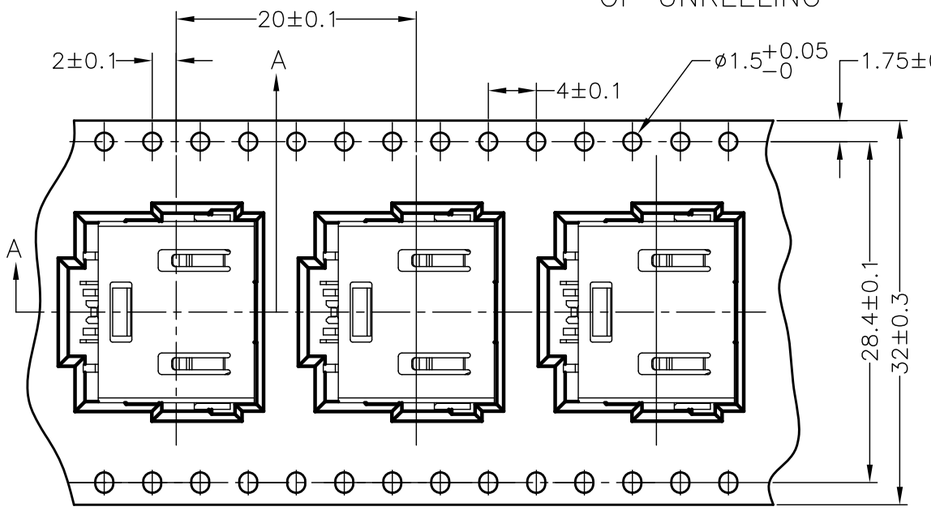




A–A

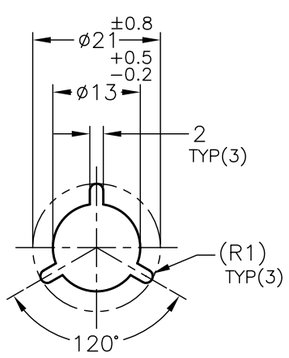



DETAIL F
SCALE: FREE



DETAIL G
SCALE 10:1

4. SHIPPING BOX DIMENSION: 445mmX445mmX270mm

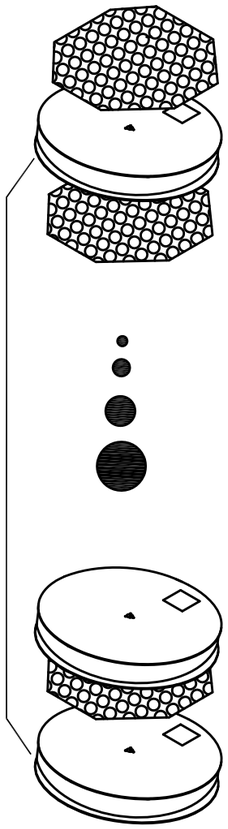

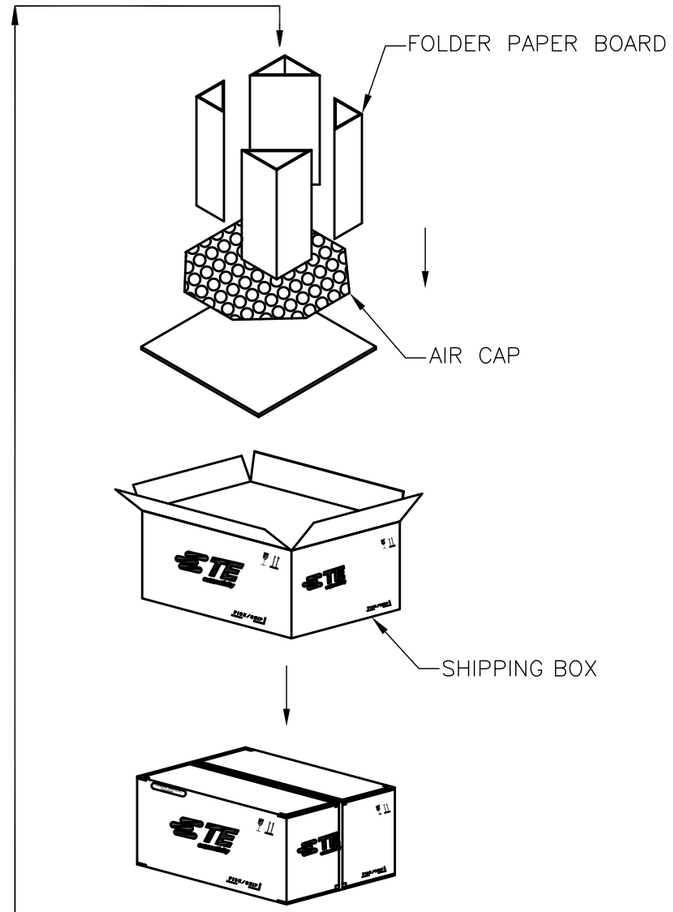

450	5	2250
PCS/REEL	REEL/SHIPPING BOX	TOTAL Q'TY

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± – ±0.25
3 PLC ± – ±3°
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN	–
CHK	–
APVD	–
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—

TE Connectivity

NAME
DC POWER JACK CONNECTOR
DIP TYPE (10.7A)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2129458	—

CUSTOMER DRAWING | SCALE NA | SHEET 3 OF 3 | REV B1