


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,19APR2005
© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECR-15-016187	16DEC2015	LN	RS

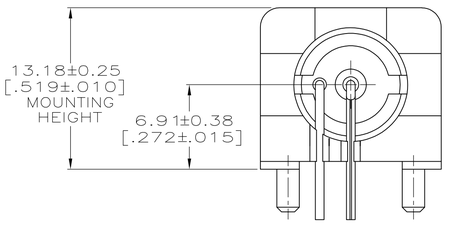

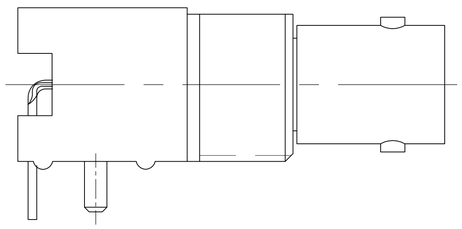


VIEW C
(SAME AS VIEW A
EXCEPT AS SHOWN)

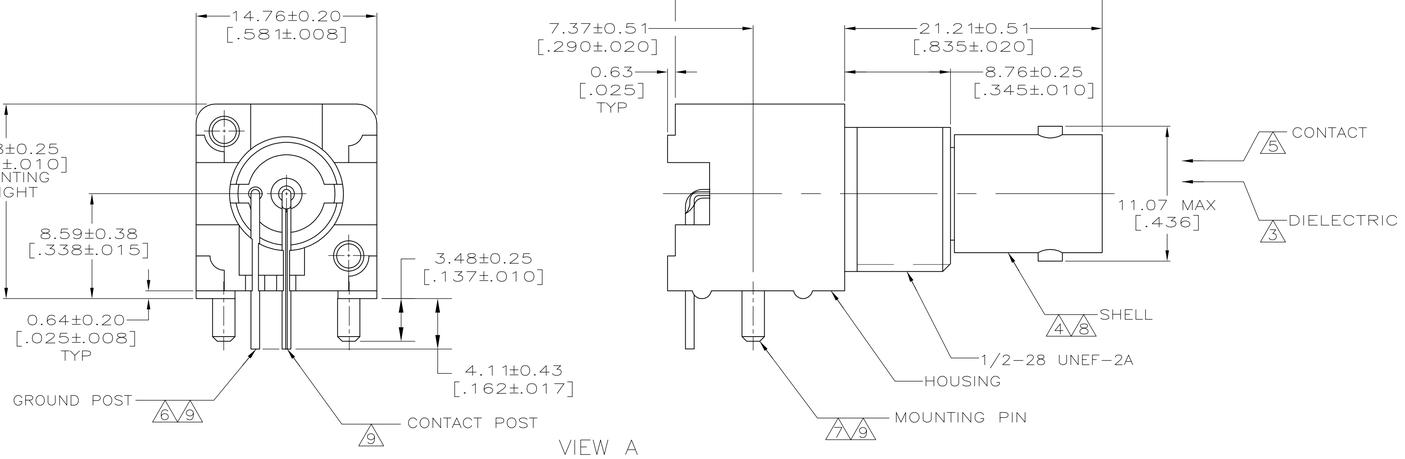


VIEW A


1. POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:WHITE
2. POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-O RATED, COLOR:BLACK
3. POLYMETHYLPENTENE, GENERAL PURPOSE.
4. ZINC PER QQ-Z-363.
5. PHOSPHOR BRONZE PER QQ-B-750.
6. BRASS PER ASTM-B-453.
7. BRASS PER ASTM-B-16.
8. NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
9. TIN PLATE PER ASTM-B-545. 3.81 μm [.000150] MINIMUM THICK.
10. GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
11. GOLD PLATE PER MIL-G-45204, 1.27 μm [.000050] MINIMUM THICK.
12. SEE INSTRUCTION SHEET 408-2769.
13. RECOMMENDED TORQUE FOR NUT(part 2) : 0.9 Nm.

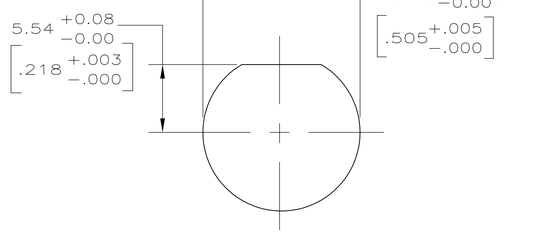

RECOMMENDED PANEL CUTOUT

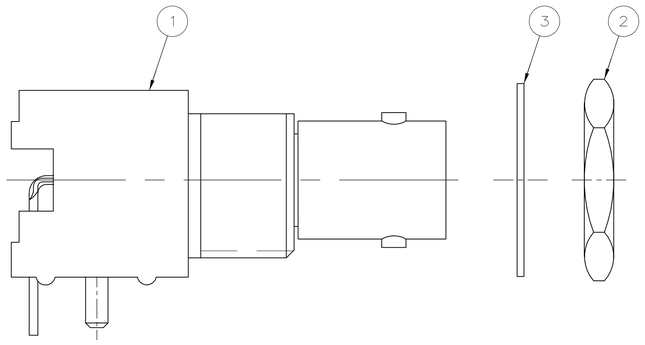

VIEW B

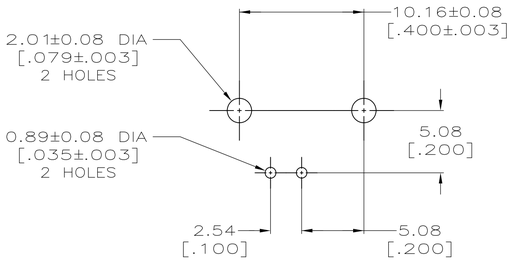

PCB CONFIGURATION

CONTACT FINISH	HOUSING MATERIAL	VIEW	(3) LOCKWASHER	(2) JAM NUT QTY=1	(1) ASSEMBLY QTY=1	PART NUMBER
–	–	B	1-329632-2	1-329631-2	5227161-9	1-5227161-7
–	–	B	1-329632-2	1-329631-2	5227161-6	1-5227161-6
10	2	C	–	–	–	1-5227161-5
10	2	C	–	–	–	5227161-9
10	1	C	–	–	–	5227161-7
10	2	A	–	–	–	5227161-6
10	1	A	–	–	–	5227161-3
9	2	A	–	–	–	5227161-2
9	1	A	–	–	–	5227161-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.05 [.002]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL 1 2 3 4 5 6

FINISH 8 9 10 11

DWN L. VARELA – DOCK5 20APR2005
CHK J. HAVENER 20APR2005
APVD S. BURKHOLDER 20APR2005
PRODUCT SPEC 108-12078
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME JACK, RIGHT ANGLE, 50 OHM, PCB, BNC

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5227161	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B2