
CUSTOMER TERMINAL	RoHS	LEAD(Pb)–FREE
Sn96%, Ag4%	Yes	Yes


(6B)


compliant RoHS WE–MIDCOM

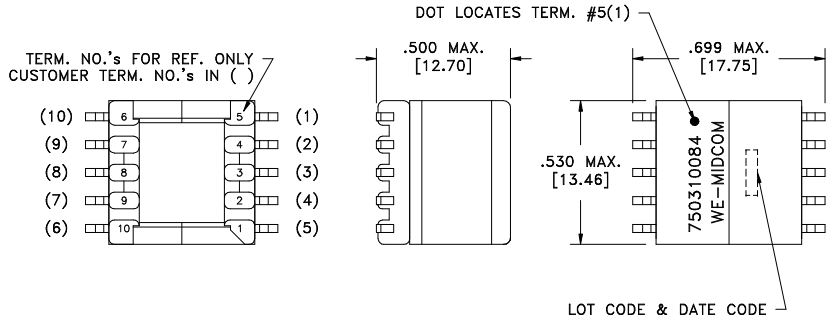

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	5–6	@20°C	0.032 ohms ±20%
D.C. RESISTANCE	4–7	@20°C	0.032 ohms ±20%
D.C. RESISTANCE	1–10	@20°C	0.285 ohms ±20%
(6D) INDUCTANCE	5–6	tie(4+5, 6+7), 100kHz, 100mVAC, Ls	2.70uH ±10%
DIELECTRIC	5–1	tie(4+5, 6+7), 625VAC, 1 second	500VAC, 1 minute
TURNS RATIO		(1–10):(5–6), tie(4+5, 6+7)	4:1, ±1%

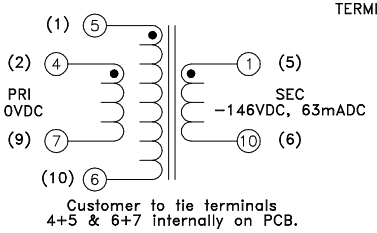

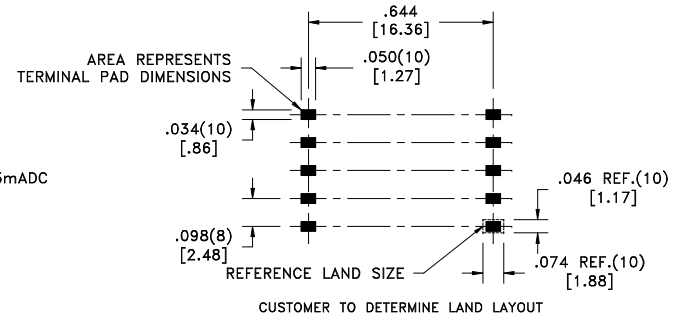

(6C) GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: –40°C to +125°C.

REV.	DATE
6D	4/08
6C	10/07
6B	7/07
6A	5/07

DETAILS SUBJECT TO CHANGE

Packaging Specifications (6B)
Method: Tape & Reel
PKG–0499
www.midcom–inc.com

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005[.127]
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER
eiSos p/n: 750310084

Midcom WE
www.midcom–inc.com
REVISIONS: SEE SHEET 1

DRAWING NO.
750310084
SCALE ---
SHEET 2 OF 5