
CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect


Midcom

WÜRTH ELEKTRONIK

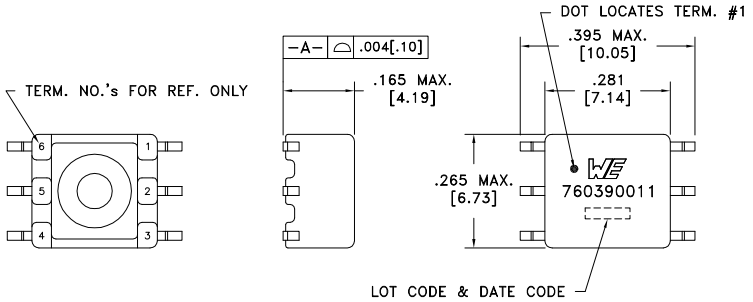

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE
6B	D.C. RESISTANCE	1-3	@20°C	0.46 ohms max.
6B	D.C. RESISTANCE	6-4	@20°C	0.48 ohms max.
	INDUCTANCE	1-3	10kHz, 100mVAC, Ls	1.0mH min.
	DIELECTRIC	1-6	1875VAC, 1 second	1500VAC, 1 minute
	TURNS RATIO		(6-4):(1-3)	1.1:1, ±2%

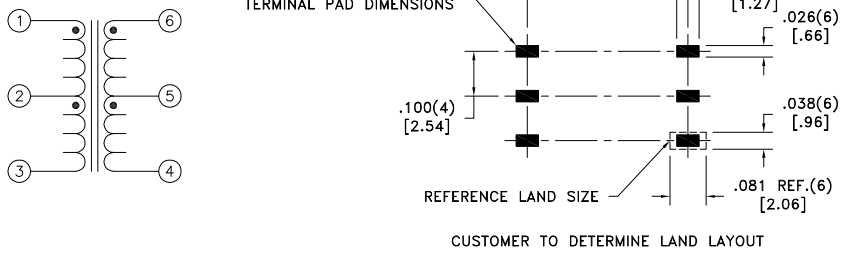

GENERAL SPECIFICATIONS:

6B OPERATING TEMPERATURE RANGE: -40°C to +125°C.

CURRENT RATING: 100mAAC

VOLTAGE-TIME: 7VuS

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE
6B	1/13
6A	12/12

Packaging Specifications
Method: Tape & Reel
PKG-0895
www.we-online.com/midcom

SEE REVISION SHEET FOR REVISION LEVEL

CONVENTION PLACEMENT

Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 760390011

compliant RoHS

PART NO.
760390011

SPECIFICATION SHEET 1 OF 1