MSSC



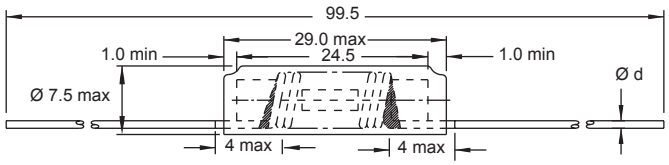

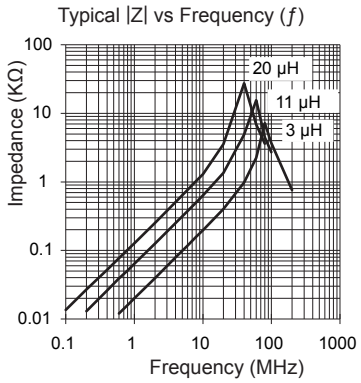

	Part No	Inductance L (µH)	f_L (MHz)	Tol ± (%)	DCR max (mΩ)	Rated DC Current (A)	Ø d (mm)
Single layer	MSSC-3R0M-00	3	1	20	6	9	1.18
	MSSC-6R0M-00	6	1	20	10	6	0.95
	MSSC-110M-00	11	0.1	20	20	4	0.70
	MSSC-130M-00	13	0.1	20	24	3	0.70
	MSSC-200M-00	20	0.1	20	54	3	0.50

Material : Ferrite

Revision date : 24 Jul 2012

SPQ :

Packing Form	Loose / Box
Axial	350 [-00]

Remarks : - Available also without insulating material (MSSC/B)
- Single layer - Model with Insulation Foil are suitable for Application in “Power Line”, rated voltage 230V AC (Testvoltage 500V DC).

● All dimensions in mm