
# HCF4070B

## QUAD EXCLUSIVE OR GATE

- MEDIUM-SPEED OPERATION
  $t_{PHL} = t_{PLH}$ = 70ns (Typ.) at CL = 50 pF and $V_{DD}$ = 10V
- QUIESCENT CURRENT SPECIFIED UP TO 20V
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT LEAKAGE CURRENT
  $I_I$ = 100nA (MAX) AT $V_{DD}$ = 18V $T_A$ = 25°C
- 100% TESTED FOR QUIESCENT CURRENT

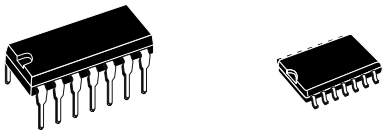

DIP SOP


### ORDER CODES

| PACKAGE | TUBE | T & R |
|---|---|---|
| DIP | HCF4070BEY | |
| SOP | HCF4070BM1 | HCF4070M013TR |


### DESCRIPTION

The HCF4070B is a monolithic integrated circuit fabricated in Metal Oxide Semiconductor technology available in DIP and SOP packages.
The HCF4070B contain four independent exclusive OR gates. This device provide the system designer with a means for direct implementation of the exclusive-OR. For applications as logical comparators, adders/ subtractors, parity generator and checkers.

### PIN CONNECTION

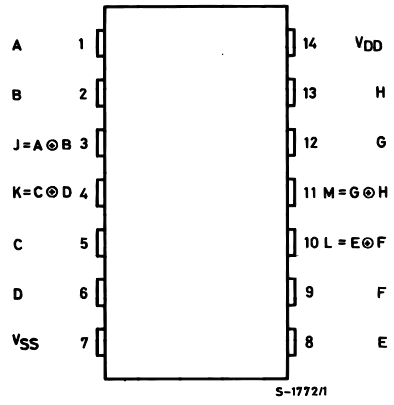

## INPUT EQUIVALENT CIRCUIT

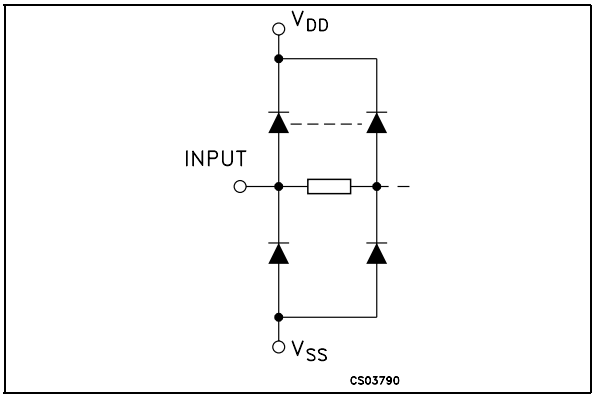



## PIN DESCRIPTION

| PIN N° | SYMBOL | NAME AND FUNCTION |
|---|---|---|
| 1, 5, 8, 12 | A, C, E, G | Data Inputs |
| 2, 6, 9, 13 | B, D, F, H | Data inputs |
| 3, 4, 10, 11 | J, K, L, M | Data Outputs |
| 7 | $V_{SS}$ | Negative Supply Voltage |
| 14 | $V_{DD}$ | Positive Supply Voltage |

## TRUTH TABLE

| INPUTS | | OUTPUT |
|---|---|---|
| A, C, E, G | B, D, F, H | J, K, L, M |
| L | L | L |
| L | H | H |
| H | L | H |
| H | H | L |

## LOGIC DIAGRAM

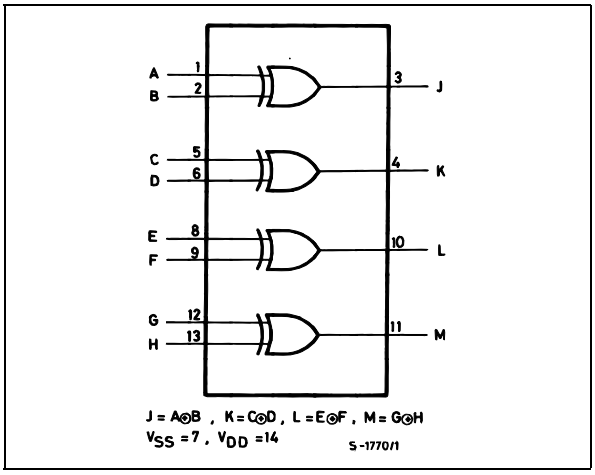


## ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|---|---|---|---|
| $V_{DD}$ | Supply Voltage | -0.5 to +22 | V |
| $V_I$ | DC Input Voltage | -0.5 to $V_{DD}$ + 0.5 | V |
| $I_I$ | DC Input Current | ± 10 | mA |
| $P_D$ | Power Dissipation per Package | 200 | mW |
| | Power Dissipation per Output Transistor | 100 | mW |
| $T_{op}$ | Operating Temperature | -55 to +125 | °C |
| $T_{stg}$ | Storage Temperature | -65 to +150 | °C |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.
All voltage values are referred to $V_{SS}$ pin voltage.

## RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Value | Unit |
|---|---|---|---|
| $V_{DD}$ | Supply Voltage | 3 to 20 | V |
| $V_I$ | Input Voltage | 0 to $V_{DD}$ | V |
| $T_{op}$ | Operating Temperature | -55 to 125 | °C |

## DC SPECIFICATIONS

| Symbol | Parameter | Test Condition | | | | Value | | | | | | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | $V_I$ (V) | $V_O$ (V) | $\|I_O\|$ (μA) | $V_{DD}$ (V) | $T_A$ = 25°C | | | -40 to 85°C | | -55 to 125°C | | |
| | | | | | | Min. | Typ. | Max. | Min. | Max. | Min. | Max. | |
| $I_L$ | Quiescent Current | 0/5 | | | 5 | | 0.02 | 1 | | 30 | | 30 | μA |
| | | 0/10 | | | 10 | | 0.02 | 2 | | 60 | | 60 | |
| | | 0/15 | | | 15 | | 0.02 | 4 | | 120 | | 120 | |
| | | 0/20 | | | 20 | | 0.04 | 20 | | 600 | | 600 | |
| $V_{OH}$ | High Level Output Voltage | 0/5 | | <1 | 5 | 4.95 | | | 4.95 | | 4.95 | | V |
| | | 0/10 | | <1 | 10 | 9.95 | | | 9.95 | | 9.95 | | |
| | | 0/15 | | <1 | 15 | 14.95 | | | 14.95 | | 14.95 | | |
| $V_{OL}$ | Low Level Output Voltage | 5/0 | | <1 | 5 | | 0.05 | | | 0.05 | | 0.05 | V |
| | | 10/0 | | <1 | 10 | | 0.05 | | | 0.05 | | 0.05 | |
| | | 15/0 | | <1 | 15 | | 0.05 | | | 0.05 | | 0.05 | |
| $V_{IH}$ | High Level Input Voltage | | 0.5/4.5 | <1 | 5 | 3.5 | | | 3.5 | | 3.5 | | V |
| | | | 1/9 | <1 | 10 | 7 | | | 7 | | 7 | | |
| | | | 1.5/13.5 | <1 | 15 | 11 | | | 11 | | 11 | | |
| $V_{IL}$ | Low Level Input Voltage | | 4.5/0.5 | <1 | 5 | | | 1.5 | | 1.5 | | 1.5 | V |
| | | | 9/1 | <1 | 10 | | | 3 | | 3 | | 3 | |
| | | | 13.5/1.5 | <1 | 15 | | | 4 | | 4 | | 4 | |
| $I_{OH}$ | Output Drive Current | 0/5 | 2.5 | <1 | 5 | -1.36 | -3.2 | | -1.15 | | -1.1 | | mA |
| | | 0/5 | 4.6 | <1 | 5 | -0.44 | -1 | | -0.36 | | -0.36 | | |
| | | 0/10 | 9.5 | <1 | 10 | -1.1 | -2.6 | | -0.9 | | -0.9 | | |
| | | 0/15 | 13.5 | <1 | 15 | -3.0 | -6.8 | | -2.4 | | -2.4 | | |
| $I_{OL}$ | Output Sink Current | 0/5 | 0.4 | <1 | 5 | 0.44 | 1 | | 0.36 | | 0.36 | | mA |
| | | 0/10 | 0.5 | <1 | 10 | 1.1 | 2.6 | | 0.9 | | 0.9 | | |
| | | 0/15 | 1.5 | <1 | 15 | 3.0 | 6.8 | | 2.4 | | 2.4 | | |
| $I_I$ | Input Leakage Current | 0/18 | Any Input | | 18 | | $\pm 10^{-5}$ | ±0.1 | | ±1 | | ±1 | μA |
| $C_I$ | Input Capacitance | | Any Input | | | | 5 | 7.5 | | | | | pF |


The Noise Margin for both "1" and "0" level is: 1V min. with $V_{DD}$=5V, 2V min. with $V_{DD}$=10V, 2.5V min. with $V_{DD}$=15V

## DYNAMIC ELECTRICAL CHARACTERISTICS ($T_{amb}$ = 25°C, $C_L$ = 50pF, $R_L$ = 200KΩ, $t_r = t_f$ = 20 ns)

| Symbol | Parameter | Test Condition | | Value (*) | | | Unit |
|---|---|---|---|---|---|---|---|
| | | $V_{DD}$ (V) | | Min. | Typ. | Max. | |
| $t_{PLH}$ $t_{PHL}$ | Propagation Delay Time | 5 | | | 140 | 280 | ns |
| | | 10 | | | 70 | 130 | |
| | | 15 | | | 50 | 100 | |
| $t_{TLH}$ $t_{THL}$ | Output Transition Time | 5 | | | 100 | 200 | ns |
| | | 10 | | | 50 | 100 | |
| | | 15 | | | 40 | 80 | |


(*) Typical temperature coefficient for all $V_{DD}$ value is 0.3%/°C.

## TEST CIRCUIT

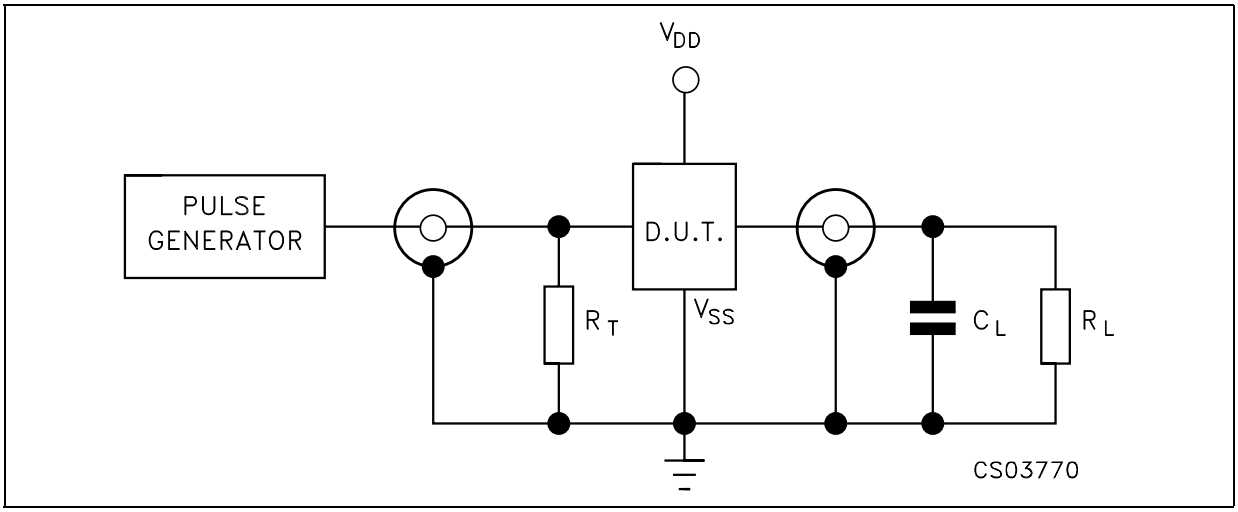



$C_L$ = 50pF or equivalent (includes jig and probe capacitance)
$R_L$ = 200KΩ
$R_T$ = $Z_{OUT}$ of pulse generator (typically 50Ω)

**WAVEFORM: PROPAGATION DELAY TIMES** (f=1MHz; 50% duty cycle)

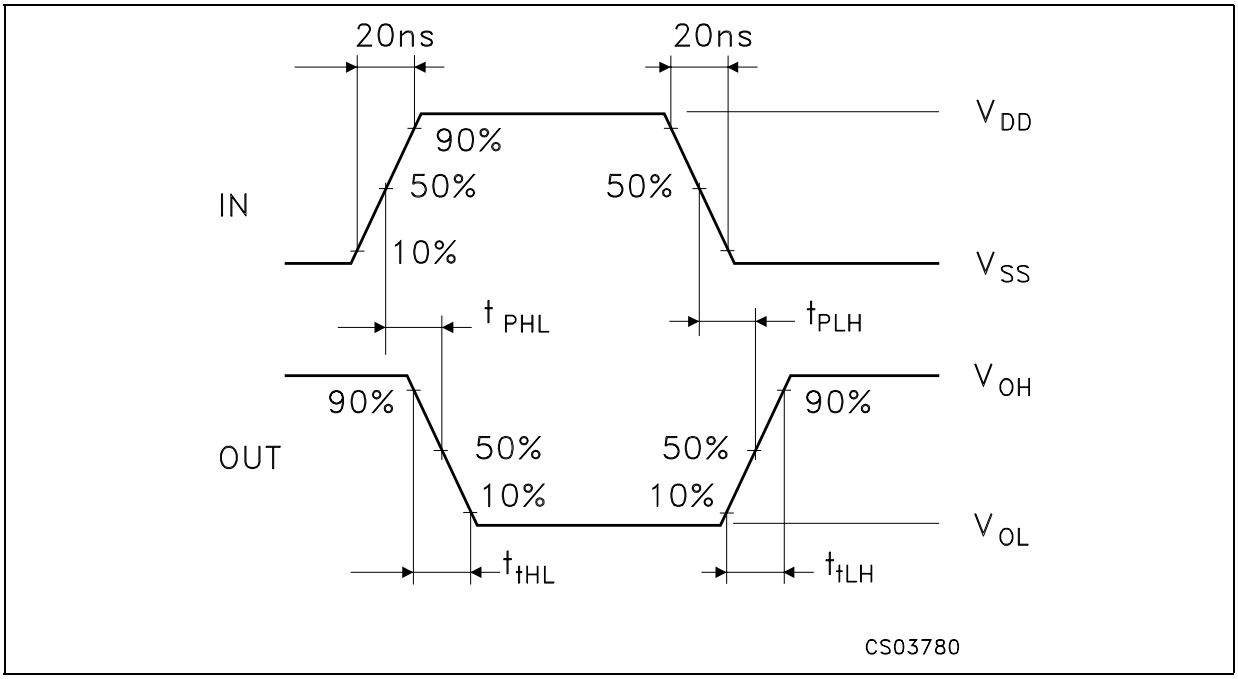

## Plastic DIP-14 MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|---|---|---|---|---|---|---|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| a1 | 0.51 | | | 0.020 | | |
| B | 1.39 | | 1.65 | 0.055 | | 0.065 |
| b | | 0.5 | | | 0.020 | |
| b1 | | 0.25 | | | 0.010 | |
| D | | | 20 | | | 0.787 |
| E | | 8.5 | | | 0.335 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 15.24 | | | 0.600 | |
| F | | | 7.1 | | | 0.280 |
| I | | | 5.1 | | | 0.201 |
| L | | 3.3 | | | 0.130 | |
| Z | 1.27 | | 2.54 | 0.050 | | 0.100 |

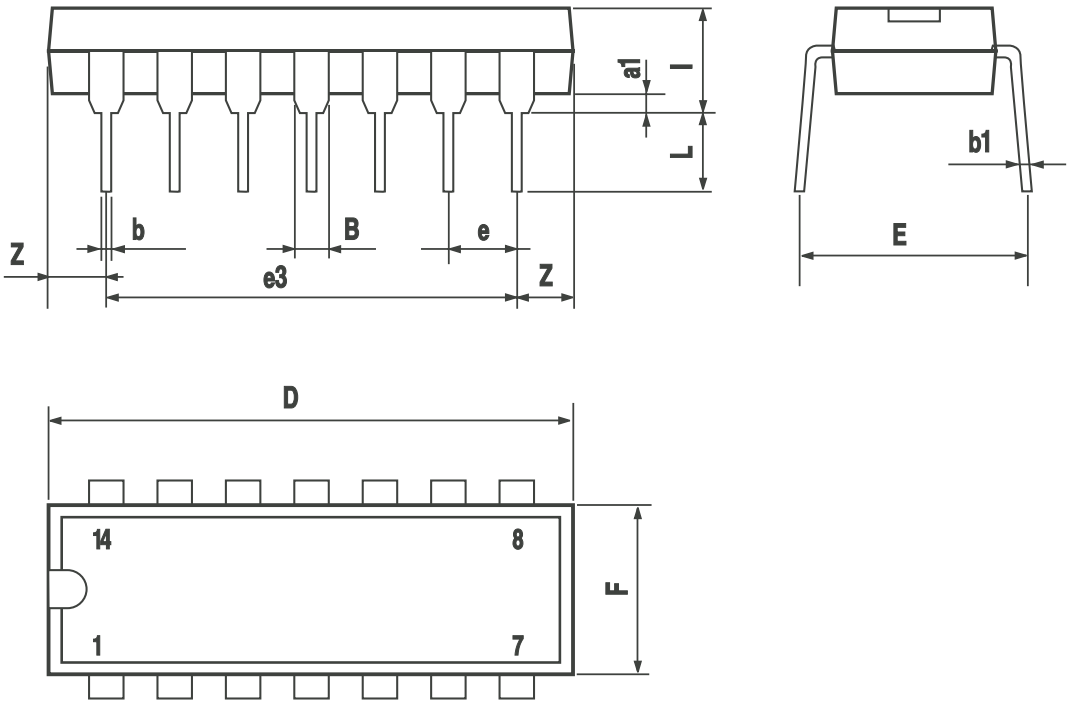


P001A

## SO-14 MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|---|---|---|---|---|---|---|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 1.75 | | | 0.068 |
| a1 | 0.1 | | 0.2 | 0.003 | | 0.007 |
| a2 | | | 1.65 | | | 0.064 |
| b | 0.35 | | 0.46 | 0.013 | | 0.018 |
| b1 | 0.19 | | 0.25 | 0.007 | | 0.010 |
| C | | 0.5 | | | 0.019 | |
| c1 | 45° (typ.) | | | | | |
| D | 8.55 | | 8.75 | 0.336 | | 0.344 |
| E | 5.8 | | 6.2 | 0.228 | | 0.244 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 7.62 | | | 0.300 | |
| F | 3.8 | | 4.0 | 0.149 | | 0.157 |
| G | 4.6 | | 5.3 | 0.181 | | 0.208 |
| L | 0.5 | | 1.27 | 0.019 | | 0.050 |
| M | | | 0.68 | | | 0.026 |
| S | 8° (max.) | | | | | |

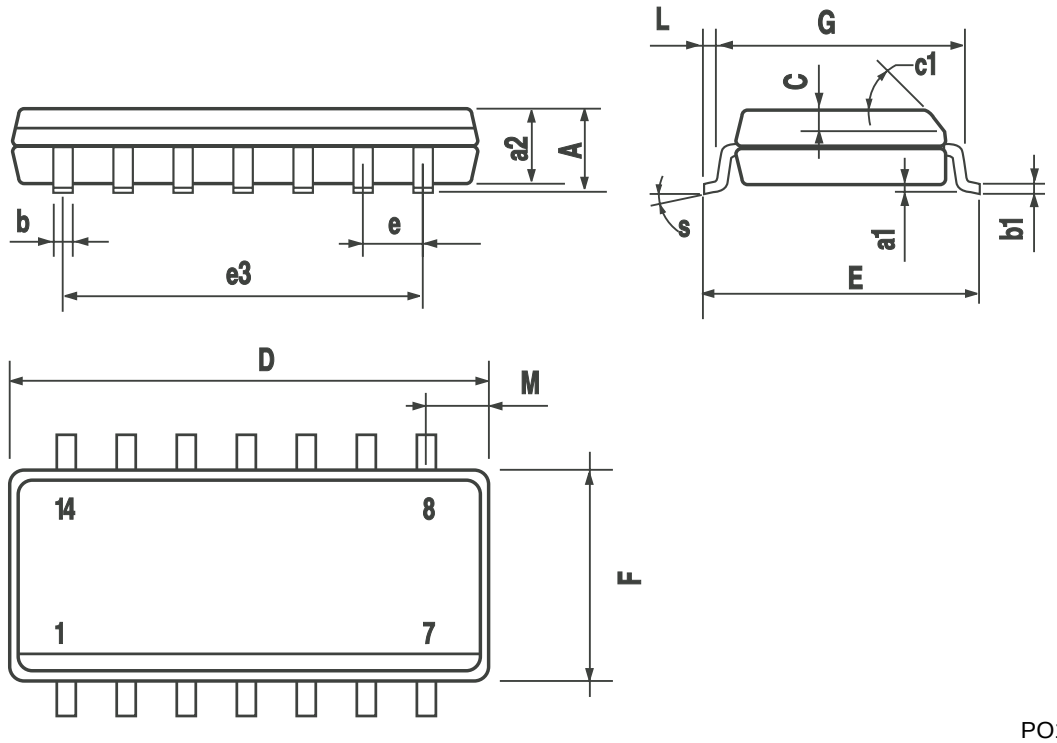


PO13G

## Tape & Reel SO-14 MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|---|---|---|---|---|---|---|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 330 | | | 12.992 |
| C | 12.8 | | 13.2 | 0.504 | | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 22.4 | | | 0.882 |
| Ao | 6.4 | | 6.6 | 0.252 | | 0.260 |
| Bo | 9 | | 9.2 | 0.354 | | 0.362 |
| Ko | 2.1 | | 2.3 | 0.082 | | 0.090 |
| Po | 3.9 | | 4.1 | 0.153 | | 0.161 |
| P | 7.9 | | 8.1 | 0.311 | | 0.319 |

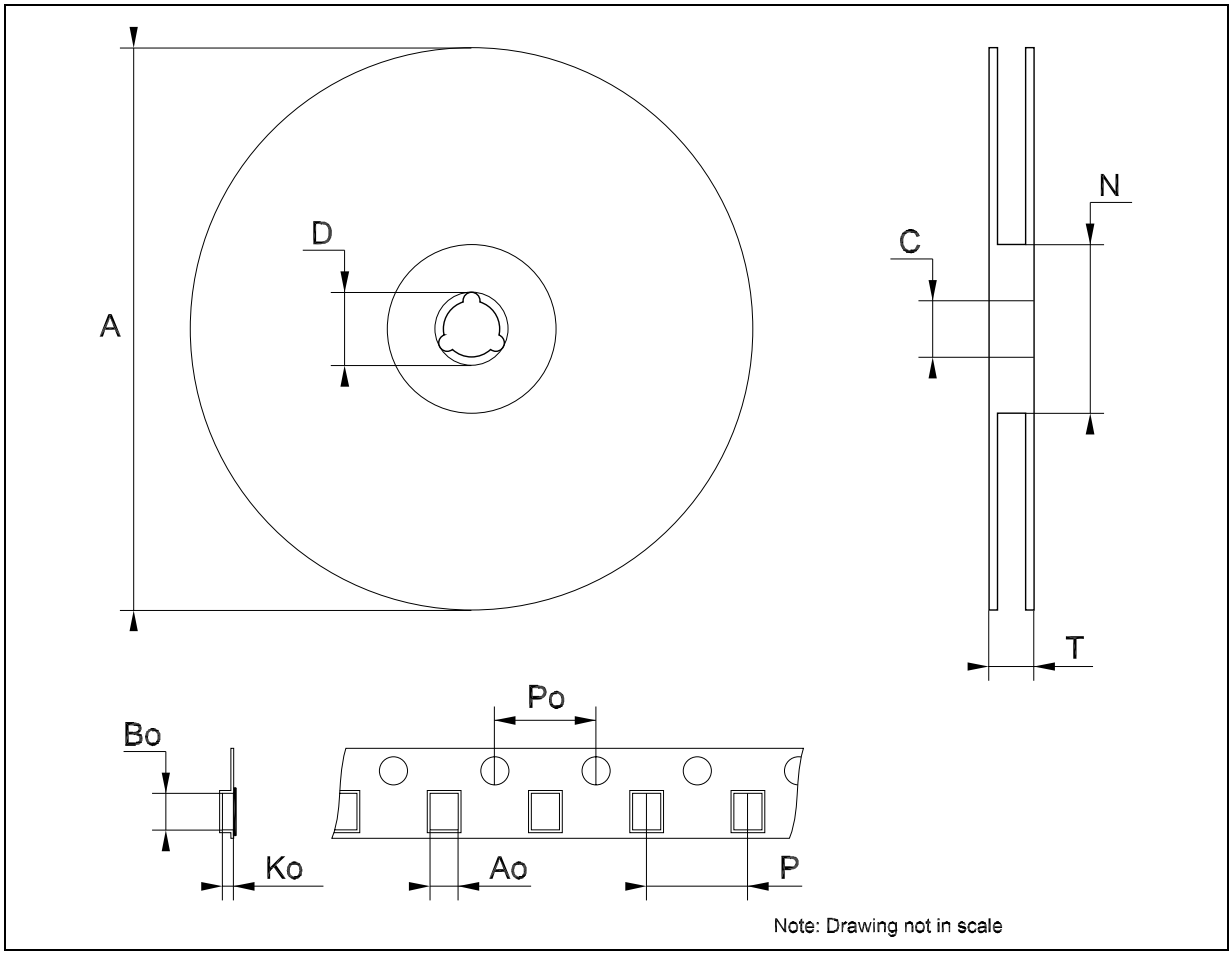


Note: Drawing not in scale

**Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.**

**The ST logo is a registered trademark of STMicroelectronics**

**All other names are the property of their respective owners**

**© 2004 STMicroelectronics - All Rights Reserved**

**STMicroelectronics GROUP OF COMPANIES**

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

**http://www.st.com**